

40 Series - Composite Video Amplifiers

40-839 1 X 8 S-VIDEO DISTRIBUTION AMPLIFIER

S-Video distribution amplifier with 1 SVHS Female input to 8 SVHS Female outputs. This unit can be used for composite video signals from a DVD player or S-Video VCR. AC adapter included.

Specifications:


INPUT:

Video System: NTSC/PAL S-Video (Y/C)
Video Input:0.50 Vpp. ~2Vpp, 75Ω
Input Terminal: S-VHS Mini-Din 4 Pin x 1


OUTPUT:

Video System: NTSC/PAL S-Video (Y/C)
Video Output:1 Vpp, 75Ω
Output Terminals: S-VHS Mini-Din 4 Pin x 8

Video Bandwidth:250MHz, (+/- 3dB)
Video Distortion:>1.2dB
Power Consumed: @ 350mA Maximum
Power Source: 12Vdc @ 500mA (included)

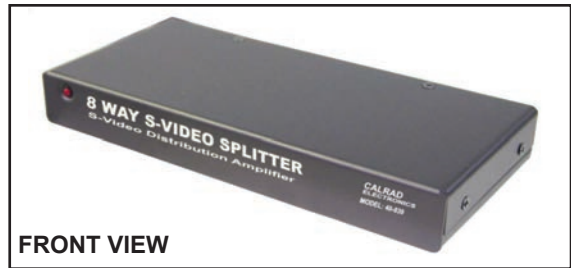

FRONT VIEW

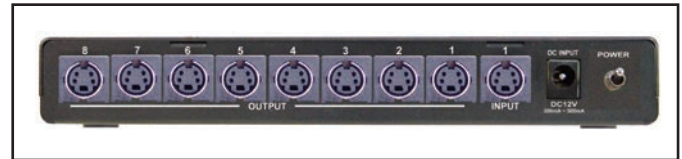


REAR VIEW

40-930M 1X8 S-VIDEO DISTRIBUTION AMPLIFIER

The 40-930M 1 X 8 S-Video (Y/C) with Analog Stereo Audio and Digital Audio Distribution Amplifier has one Input for S-Video and Gold Plated RCA jacks for composite video and audio. Eight outputs are also S-Video and RCA composite video and audio. Front panel on/off switch. Video amplifier bandwidth: 700MHz. Digital audio bandwidth: 110MHZ. Audio frequency response: 20Hz - 20KHz. Power supply: 12VDC; 1.2A included. Dimensions: Length 6.4" x Width 17" x Height 1.75".



FRONT VIEW

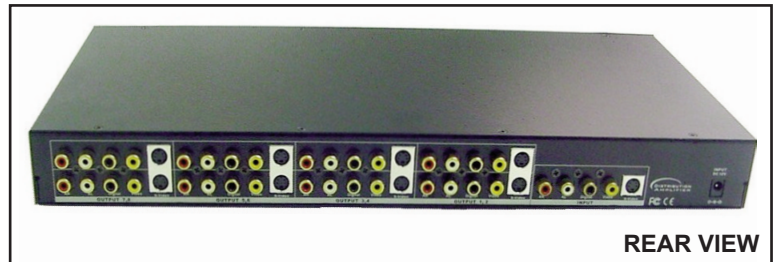

REAR VIEW

40-827M 1 X 16 AUDIO / VIDEO DISTRIBUTION AMPLIFIER

Composite Video/Stereo Audio Distribution Amplifier. Includes AC power adapter.


Specifications:

INPUT:

Type of Video: Composite Video x 1 Output:
Video Input:+1 Vpp, 75Ω
Audio Input:Stereo (R+L) 40KΩ
Terminals In/Out: ...RCA Jacks (Female)
Dimensions: Length 5.9" x Width 17.32" x Height 2.6"
Power Source 12Vdc, @500ma pos. center
AC Power Adapter Included.

OUTPUT:

Video Output: Composite Video x 16
+1Vpp 75Ω
Audio R+L Output: RCA jacks (Female) x 16
Stereo (R+L), 40KΩ
Video Bandwidth: >250 MHz
Video Distortion: <1.2dB (+/- 3dB)
Audio Distortion: <0.6dB (+/- 3dB)
Channel Isolation: >50dB
Signal to Noise Ratio: <50dB

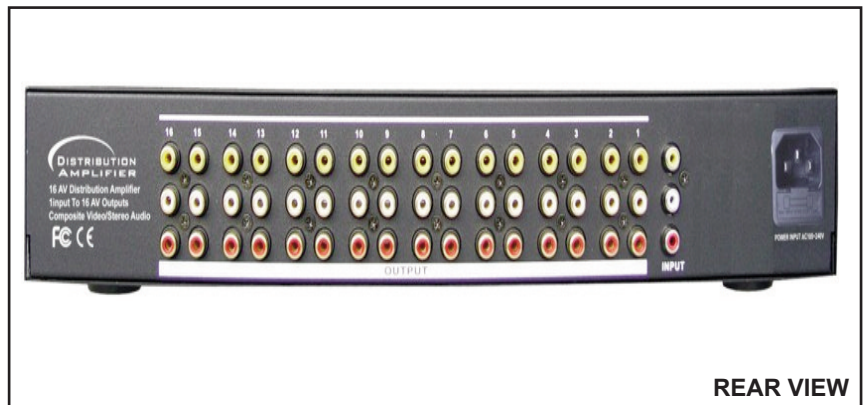

REAR VIEW