


CALRAD


35 Series - Adapters



35-498BH 4 pin
35-498BH-6 6 pin
35-498BH-8 8 pin
 Bulkhead mini-din connector w/ 2 nut mounting. Panel mount 4 pin SVHS Female-Female. Mounts in 1/2" single "D" hole
35-498G-BH Gold 4 pin version
35-498G-BH-6 Gold 6 pin version



Small Slotted
Screw Driver
Required

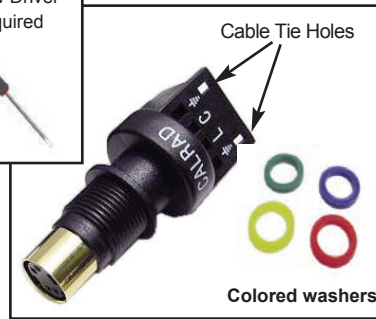


Cable Tie Holes

Colored washers

35-498K-S
 Solderless Keystone or chassis mount SVHS jack with screw terminal connectors. Mounts in 1/2" hole or standard keystone insert. Comes with cable tie for strain relief. Colored ID washers available (30-288-COLOR). Also available in BNC (75-686K-S) and RCA (30-308K-S) versions.



35-498 4 pin
35-498-6 6 pin
35-498-8 8 pin
 Bulkhead SVHS connector with 2 nut mounting. Panel mount 4 pin SVHS Female to Female. Mounts in 1/2" double "D" hole.



35-494
 SVHS 4 pin Female to 2 Female BNC on circuit board. Panel mount with screw holes. Breaks out C and YC-Y.



35-499
 SVHS Male to RCA Female adapter. Converts SVHS signals to composite video. Bi-directional. Gold plated connectors and black chrome body.



35-499-SF
 SVHS Female to RCA Female adapter. Converts SVHS signals to composite video. Bi-directional. .47" long. Converts SVHS signals to composite video. Bi-directional. Gold plated connectors and black chrome body.



35-499-P
Economy
 Male SVHS to Female RCA
35-499-SF-P
 Female SVHS to Female RCA
35-499-S-P
 Female SVHS to Male RCA
35-499-BNC-P
 Male SVHS to Female BNC



35-499-S
 SVHS Female to composite RCA Male cable adapter. Converts SVHS signals to composite video. Bi-directional. 6" long. molded connectors and gold plated contacts.



35-496-4 4 pin
35-496-6 6 pin
35-496-8 8 pin
 Female to Female mini-din coupler, plastic body.



35-497A (18 in.)
35-497A-6 (6 ft.)
 SVHS "Y" adapter. Molded and shielded "Y" cable with 1-Male to 2-Females, pin to pin wiring. Overall length 12". For SVHS signals.



35-497
 SVHS "Y" adapter. non-directional pin-to-pin wiring of luminance and chrominance signals.



35-495
 Midi coupler. 5 pin DIN coupler Female-Female.



35-441
 Fiber-optic toslink coupler. Female to Female. Over all length .72".



35-443
 Fiber-optic toslink Male to 3.5mm Female. bi-directional signal path.



35-440
 Fiber-optic 3.5mm Male to toslink Female bi-directional signal path.



35-444
 Right Angle Toslink Connector 2 piece construction enables the 360° rotation of cable. Female in to Male out.



35-442
 Toslink fiber-optic splitter. Non directional. Connects 3 toslink cables together.



35-439
 Passive 3-way toslink optical switch. Passive selection knob with a spring loaded lock mechanism and selection indicator. Bi-directional switching. Size: 5.5"W x 1.3"H x 4.5"D.