



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



# DUCT DOORS Walk Through Door WD-8000

## Application

- Designed to provide convenient walk through access to duct work interiors and air handling units
- Low to medium pressure systems and plenums

## Product Features

- Heavy duty construction, along with a continuous hinge and compression handles

Optional Features: Removable Door Panel / Vision Panel / High Pressure Units / Key Operated Handles

## WD-8000 Access Door Specifications:

**Door / Door Frame:** 22 gauge galvanized steel, double panel frame is 1 15/16" wide x 1 1/2" deep extruded aluminum with mitred corners


**Hinge:** Continuous steel piano hinge—opens 180°

**Insulation:** Door panel filled with 1" thick fibreglass insulation - 4 R value

**Gasket:** 1/8" thick x 1/2" wide closed cell neoprene gasketing between door and frame

**Standard Latch:** Dual acting compression handles—operable from both sides.  
Units 48" high and under to have 2 handles.  
Units over 48" high to have 3 handles

**Finish:** Mill finish

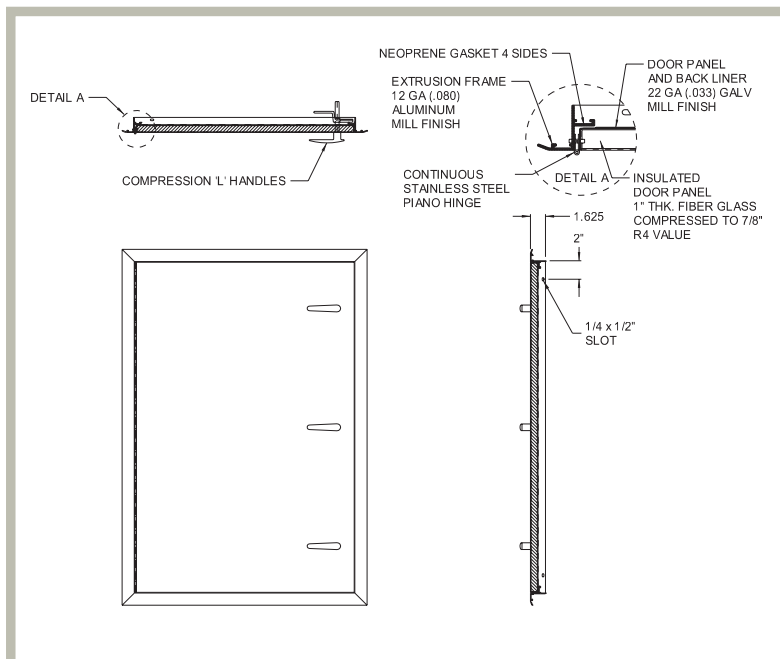

## STANDARD SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR	
inches	mm	lbs.	kg.
24 x 36	610 x 914	24	52.8
24 x 48	610 x 1219	35	77.0
24 x 60	610 x 1524	44	97.0
24 x 72	610 x 1829	52	114.4
30 x 36	762 x 914	32	70.4
30 x 48	762 x 1219	43	95.0
30 x 60	762 x 1524	54	119.0
30 x 72	762 x 1829	65	143.0

Wall or ceiling opening is nominal door size + 3/8" (9 mm)  
For detailed specifications see submittal sheet