

NOISE ATTENUATORS


Series-A ORIFICE PLATE for Pressure Regulating Valves

Watson McDaniel reserves the right to change the designs and/or materials of its products without notice.
©2010 Watson McDaniel Company

Noise Attenuation Equipment is used to reduce unwanted or excessive noise that commonly occurs in pressure reducing stations.

Series-A ORIFICE PLATE

Noise Reduction Capability: 5-10 dBA

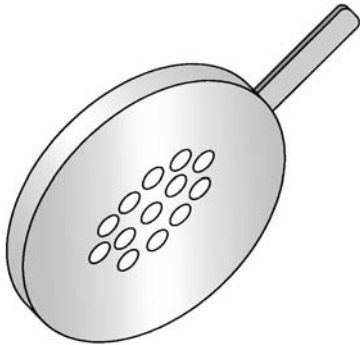

Series-A Orifice Plate

HOW IT WORKS


The **Series-A** Orifice Plate with its drilled orifice pattern is installed after the pressure regulating valve to smooth out turbulence caused by the pressure drop across the regulator. Noise reduction levels of **5-10 dBA** can typically be achieved.

INSTALLATION


The Series-A Orifice Plate is installed between ANSI flanges immediately after the regulator. If the regulator is a flanged unit, the orifice plate is placed at the flange outlet connection.

PILOT-OPERATED
REGULATING VALVES

Series-A Typical Hook-up

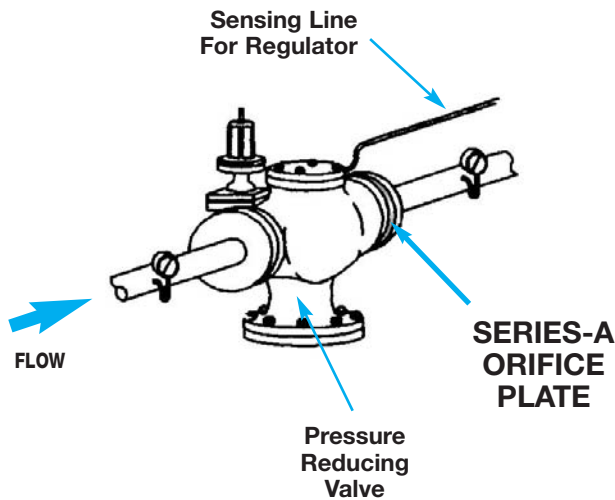

Series A Dimensions

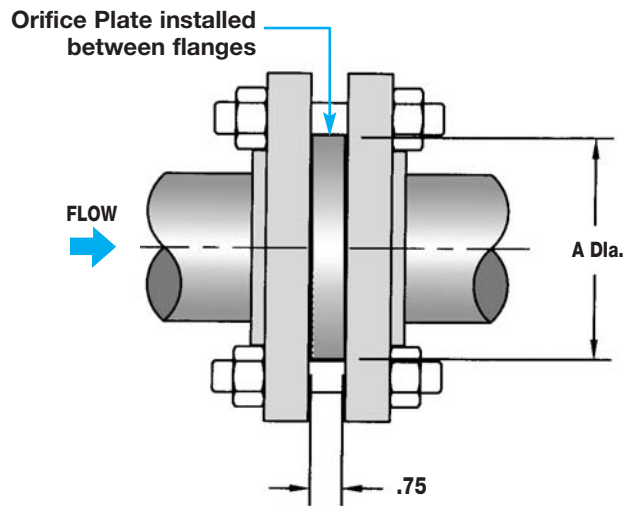

Series-A DIMENSION (A) – inches

Pipe Size	125# Flange	250# Flange
2"	6	4 ³ / ₁₆
2½"	7	4 ¹⁵ / ₁₆
3"	7½	5 ¹¹ / ₁₆
4"	9	6 ¹⁵ / ₁₆
6"	11	9 ¹¹ / ₁₆

Note: Other sizes available. Consult factory.