

CO5120 SERIES

120V AC/DC CARBON MONOXIDE ALARMS

CO5120BN



- Advanced electrochemical CO sensor
- Two Latching features – Alarm Latch: Remembers which unit initiated an alarm. Low Battery Latch: Identifies which unit is in low battery condition
- Two silence features – can silence the low-battery chirp for up to eight hours or temporarily silence an unwanted nuisance alarm
- Intelligent Sensing Technology™ – helps reduce the number of nuisance alarms
- End of Life signal
- 9V alkaline battery backup
- 7 year warranty
- LCD display with memory (cat. no. CO5120PDBN)



CO5120PDBN

Miscellaneous

HD6135FB

120V AC/DC HEAT ALARM W/RATE-OF-RISE




- 135°F Fixed temperature and Rate-of-Rise Thermistor heat sensor
- Remote Control Silence/Test uses most remote controls to temporarily quiet unwanted alarms and test alarm functions
- Latching alarm indicator – remembers which unit initiated an alarm
- Two silence features - can silence the low-battery chirp for up to eight hours or temporarily silence an unwanted nuisance alarm
- 9V battery backup
- For applications not suitable for smoke alarms
- 10 year warranty



Understanding Rate of Rise

This allows the unit to sense a heat rise and alarm prior to reaching the fixed temperature. The alarm will sound when the microprocessor senses a temperature rise of a set number of degrees per minute. This enables a more rapid response to a potential fire.

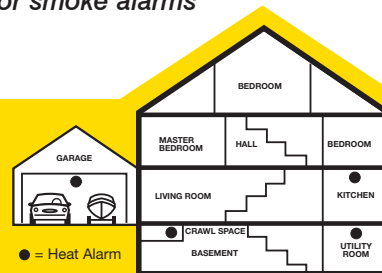

SL177

120V AC SMART STROBE



- Smart Strobe has separate flash patterns to distinguish between a smoke/heat or CO danger
- Bright 177 candela strobe light
- 1Hz flash rate meets ADA, ANSI 117.1, NFPA 72 and UL 1971 requirements for visual signaling devices
- Can be interconnected with BRK/First Alert smoke, heat and carbon monoxide alarms
- 10 year warranty



What's a "Smart Strobe"? Separate flash patterns help a hearing impaired person better distinguish the danger present. Smoke or Heat Alarms: constant 1 flash per second. CO Alarms: 1 flash per second for 4 flashes, then 5 seconds off. Pattern is repeated.

120V AC PLUG-IN CO ALARMS

CO600 SERIES

CO604B with battery back up

- Economical Cost Effective CO Alarm
- Advanced Electrochemical CO Sensor
- Silence feature - temporarily silence an unwanted nuisance alarm
- 9V battery backup
- End of Life signal & 7 year warranty

CO614B with battery backup and display

Same features as above plus:

- LCD display with memory- clearly shows the hazard and level

Multi-family Manager Tip: 9V batteries are less prone to tenant theft for use in other electronic devices due to their infrequent usage by manufacturers.



CO604B

CO614B

CO600B

- Advanced Electrochemical CO Sensor
- Silence feature - temporarily silence an unwanted nuisance alarm
- End of Life signal & 7 year warranty

CO605B with battery back up

Same features as above plus:

- Front-access battery compartment - allows easy battery replacement
- Two AA battery backup
- Convenient Installation Options: unit plugs directly into the wall or can be mounted higher on the wall using the line cord

CO615B with battery backup and display

Same features as above plus:

- Large display - clearly shows the hazard and level

Save 33% on annual battery replacement costs - Features 2 AA batteries vs. 3 for competitive products.

CO600B/
CO605B



CO615B



120V AC PLUG-IN EXPLOSIVE GAS & CO COMBO ALARM W/BATTERY BACKUP

GCO1B

- 3-way protection against natural (methane) gas, propane gas and carbon monoxide.
- Large display - clearly shows the hazard and level
- Two silence features – can silence the low-battery chirp for up to eight hours or temporarily silence an unwanted nuisance alarm
- Convenient Installation Options: unit plugs directly into the wall or can be mounted higher on the wall using the line cord
- End of Life signal
- 9V alkaline battery backup
- 5 year warranty

