


Cast Iron Threaded Fittings

Safety Valve Discharge Elbows

FIGURE 1538
Screwed
Cast Iron

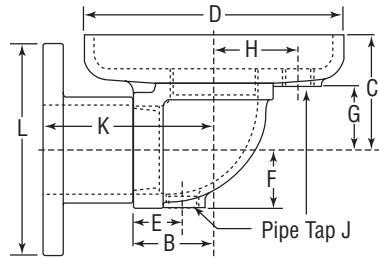


Elbow Pipe Size	Riser Pipe Size A		B		C		D		E		F		G		H		J		K		L		Unit Weight Black		
	NPS	DN	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	
2½	65	3½	89	2 ¹¹ / ₁₆	89	4 ⁵ / ₁₆	110	8½	216	1 ⁵ / ₈	41	1 ¹⁵ / ₁₆	49	2 ¹ / ₈	54	2 ³ / ₄	70	¾	19	-	-	-	-	12.00	5.44
3	80	4	102	3 ¹ / ₈	79	4 ⁷ / ₈	124	9½	241	1 ⁵ / ₈	41	2 ⁵ / ₁₆	59	2 ⁹ / ₁₆	65	3 ¹ / ₈	79	¾	19	-	-	-	-	15.00	6.80
4	100	5	127	3 ³ / ₄	95	5 ³ / ₄	146	11	279	1 ³ / ₄	44	2 ¹⁵ / ₁₆	75	3 ³ / ₁₆	81	3 ³ / ₄	95	¾	19	-	-	-	-	27.00	12.24

Following are the advantages of Anvil safety valve discharge elbow for piping connections to safety valves when attached to boilers, etc.:

- Drip pan for removing condensate and rain water casts integral with elbow.
- Strains on safety valve minimized.
- Pipe tap J is standard.

With multiple pop safety valve, leakage of vapor at any discharge elbow indicates valve in operation.

Street elbows and flanged elbows furnished on order.

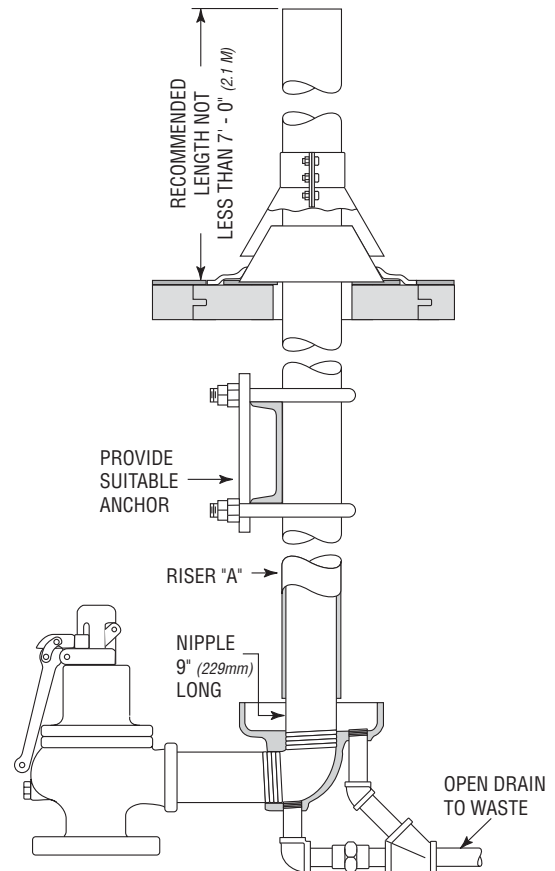

Note: See page 36 for pressure-temperature ratings.