


ANVILETS

Universal Forged Steel Anvilets

XXS, SCH. 160 Butt weld

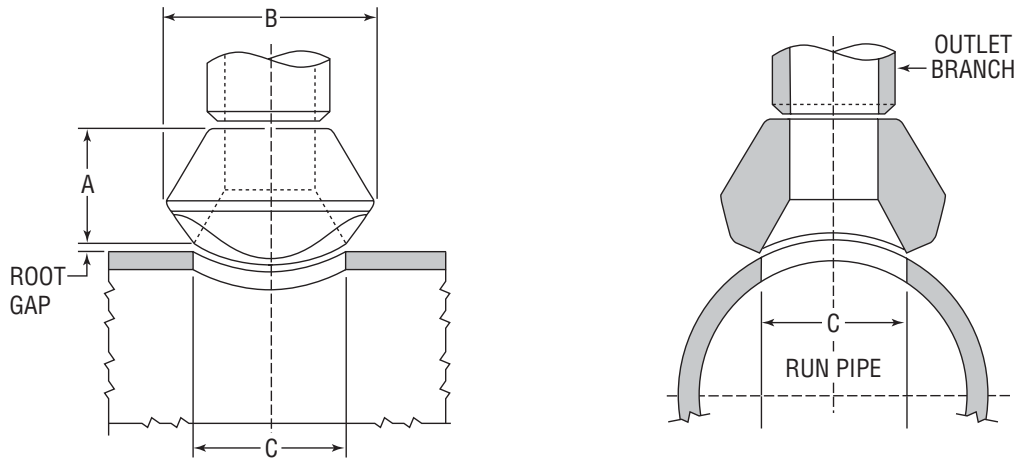

BUTTWELD XXS, Sch. 160	Outlet Size		Dimensions						Unit Weight	
			A		B		C			
	NPS	DN	in	mm	in	mm	in	mm	lbs	kg
	1/2	15	1 1/8	29	1 3/8	35	0.563	14	0.25	0.11
	3/4	20	1 1/4	32	1 3/4	44	0.750	19	0.70	0.32
	1	25	1 1/2	38	2	51	1.000	25	0.85	0.39
	1 1/4	32	1 3/4	44	2 1/16	62	1.313	33	1.25	0.57
	1 1/2	40	2	51	2 3/4	70	1.500	38	1.75	0.79
	2	50	2 3/16	56	3 3/16	81	1.688	43	2.15	0.98
	2 1/2	65	2 7/16	62	3 13/16	97	2.125	54	3.40	1.54
	3	80	2 7/8	73	4 3/4	121	2.875	73	6.30	2.86
4	100	3 5/16	84	6	152	3.875	98	4.56	4.76	

Each outlet size listed is available to fit any run curvature. BW Ends per B16.9 and B16.25. Design per MSS-SP-97.

RUN PIPE SIZES Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 121 for run pipe size combination table(s).

SCHEDULES Standard Weight Fittings are the same as schedule 40 fittings through 10". A schedule 40 butt-welded Universal Forged Steel Anvilet for sizes 12" and larger is available. Dimensions and prices on application. Extra Strong Fittings are the same as schedule 80 fittings through 8". A schedule 80 butt-welded Universal Forged Steel Anvilet for sizes 10" and larger is available. Dimensions and prices on application. Pipe schedule numbers and weight designations are in accordance with ASME B36.10.

FLATS Flat butt-welded Universal Forged Steel Anvilet fittings for use on welding caps, elliptical heads and flat surfaces is available.

The A, B and C dimensions given for the Branch Connections in the above Table are for reference only and to be used as a guideline. Dimensions B and C are subject to change depending upon the manufacturing process utilized. Although every attempt has been made to insure that the information contained in this table is correct, Anvil reserves the right to change the C dimension as deemed necessary.