

# CouncilMAN

Conference System

- Conference Mics Daisy Chain with Standard XLR Cables
- Chairman Mic Can Mute All Delegate Mics
- Immunity from Mobile Telephone Interference
- 16 Channel UHF Wireless Mic Option
- No Installation Required

REAL PORTABLE CONFERENCE SOLUTIONS



TWO YEAR WARRANTY




MADE IN THE USA

AnchorAudio.com • 800.262.4671



Anchor Audio's portable conference system travels from the council chambers to community center with ease of setup and simplicity of use. The CouncilMAN™ is flexible to the demands of most room sizes and manages up to ten microphones. With an optional wireless microphone the panel takes questions from the audience.

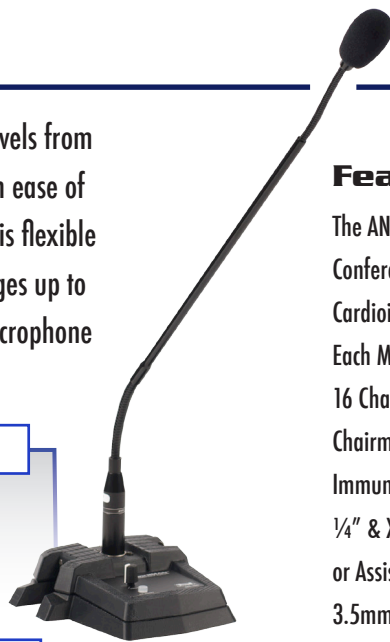

## Technical Specifications

### Features

- The AN-100CM+ Powers up to Sixteen Microphones
- Conference Microphones Daisy Chain with Standard XLR Cables
- Cardioid Electret Microphones have Excellent "Pick-Up"
- Each Microphone has Adjustable Volume Control
- 16 Channel UHF Wireless Microphone Option for Audience Q&A
- Chairman Microphone Can Mute All Delegate Microphones
- Immunity from Mobile Telephone Interference
- 1/4" & XLR Balanced Line Out for Recording, Connection to House Audio System or Assistive Listening System
- 3.5mm Line In for Music Player Device
- Reaches Crowds up to 150 People

### AN-100CM+ MODELS


AN-100CM+	Speaker monitor/black
AN-100CMU1+	One built-in wireless receiver/black
CHM-100	Chairman microphone
DEL-100	Delegate microphone

### UHF WIRELESS

WH-6000	Wireless handheld microphone/transmitter
---------	--

### ACCESSORIES

SS-250	Speaker stand
SB-3BK	40° Tilt Ceiling mount bracket
SB-360BK	360° swivel wall bracket
HC-ARMOR24-CM	Anchor Armor hard case - CouncilMAN
CC-550	Soft Case for two SS-550 speaker stands
RM-1BK	Single rackmount
RM-12BK	Dual rackmount
EX-4M	4 ft. XLR cable
EX-25M	25 ft. XLR cable

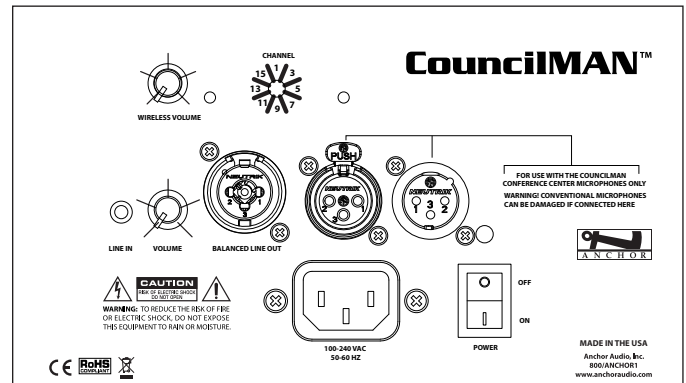

(AN-100CMU1+ Control Panel Shown)

## Technical Specifications

### AN-100CM+ Console Speaker

Rated Power Output	30 watts
Max SPL @ Rated Power	103 dB @ 1 meter
Frequency Response	65 Hz - 18 kHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter Magnetically shielded
AC Power Reqs.	100 - 240 VAC, 50/60 Hz
Fuse Rating	T 1.0A / 250 V (internally mounted)
Export Model	T 0.5A / 250 V (internally mounted)
Line In	3.5mm
Line Out	Lo-Z, buffered, XLR and 1/4" Balanced
Line Output Level	-20 dBV (100 mVrms)
Enclosure Material	ABS Plastic
Dimensions (HWD)	5.25" x 8.4" x 9" (13 x 21 x 23 cm)
Weight	8.5 lbs / 3.8 Kg
Warranty	6 years



(Features & Specifications Subject to Change Without Notice)

### CHM-100/DEL-100 Microphone Base

Power Requirement	+22 VDC @ 60 mA from pin 2 of daisy chain
Output Impedance	>10k Ω
Phantom Power	18 V
Dimensions (HWD)	5.8" x 6.5" x 1.75" (14.73 x 16.51 x 4.45 cm)
Weight	0.90 lbs / .41 Kg
Daisy Chain In/Out	Male and Female 3-pin XLR
CHM-100 Controls	Push to Talk, Volume and Mute Others
DEL-100 Controls	Push to Talk and Volume
Warranty	2 years

### LM-618 Gooseneck Microphone

Pickup Pattern	Cardioid
Type	Electret Condenser
Phantom Power	9 - 52 Volts DC
Impedance	600 Ω (balanced)
Response	50 Hz - 18 kHz ±3dB
Sensitivity	-56 dB @ 1 kHz open circuit (0 dB = 1 V/ubar)
Dimension	24" long, 1/2" diameter
Warranty	2 years