

Series 92/94 Local Remote Stations



LL-200

LL-200 is to be used in conjunction with Series 92 or 94, AC powered and on/off actuator.


Standard Features

- Visual light indication
- Weatherproof enclosure constructed of fiberglass polyester
- Stainless steel trim
- Captive cover gasket
- Captive cover screws
- Two position selector switch (open and close)
- Three position selector switch (hand, off, auto)
- 40° F - 266° F temperature range

Options

- Explosion proof enclosure
- 316 stainless steel enclosure
- Contact factory for specific applications

SERIES 92 OR SERIES 94 115 VAC ELECTRIC ACTUATOR
ACTUATOR SHOWN IN COUNTER-CLOCKWISE EXTREME OF TRAVEL, OR "OPEN" POSITION

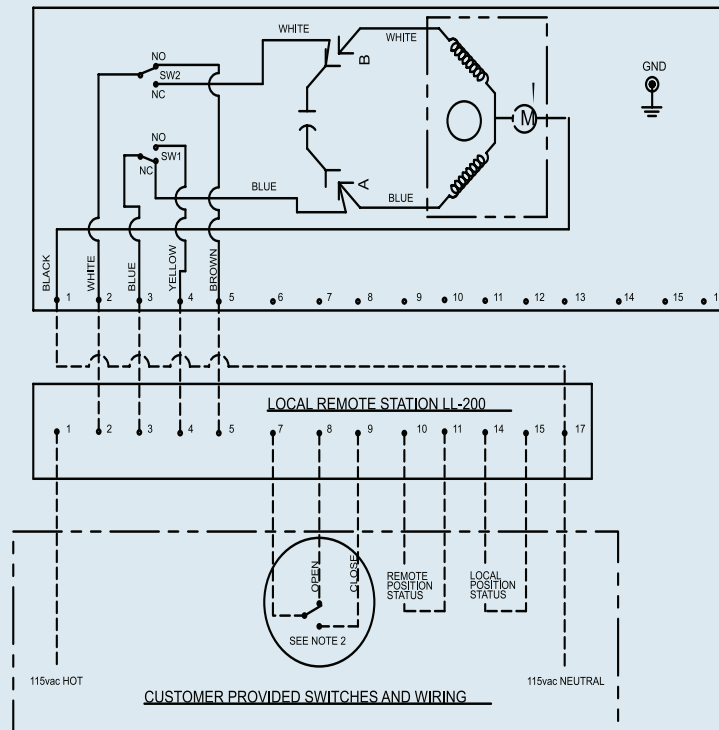

NOTE:

1. LOCAL REMOTE STATION IS NOT CLOSE COUPLED TO ACTUATOR. FIELD WIRING OF LOCAL REMOTE STATION TO ACTUATOR IS TO BE PERFORMED BY OTHERS.

2. CUSTOMER PROVIDED SWITCH INSTALLED AT TERMINALS 7, 8, & 9 IS FOR REMOTE USE ONLY.