


*Clean air...it's what we do*

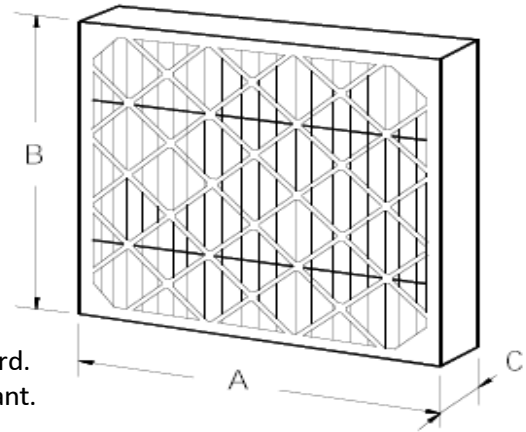



**Specifications**

Frame: 26 point high wet strength clay-coated kraft board.  
 Media: 100% synthetic fibers, water and bacteria resistant.  
 Media bonded to frame using water resistant adhesive.  
 Media bonded to expanded metal support grid using water resistant adhesive.  
 Efficiency: 25-30% per ASHRAE 52.1; MERV 7-8 per ASHRAE 52.2  
 UL 900: Class 2

**Pleat - 4" Nominal Depth, High Capacity**

Model Number	Width "A"	Height "B"	Depth "C"
AFP3000-5504	24-1/2"	24-1/2"	3-3/4"
AFP3000-4404	23-3/8"	23-3/8"	3-3/4"
AFP3000-0504	19-1/2"	24-1/2"	3-3/4"
AFP3000-0404	19-1/2"	23-3/8"	3-3/4"
AFP3000-0004	19-1/2"	19-1/2"	3-3/4"
AFP3000-8504	17-3/8"	24-1/2"	3-3/4"
AFP3000-8404	17-3/8"	23-3/8"	3-3/4"
APF3000-6504	15-1/2"	24-1/2"	3-3/4"
AFP3000-6004	15-1/2"	19-1/2"	3-3/4"
AFP3000-2404	11-3/8"	23-3/8"	3-3/4"
AFP3000-2004	11-3/8"	19-1/2"	3-3/4"

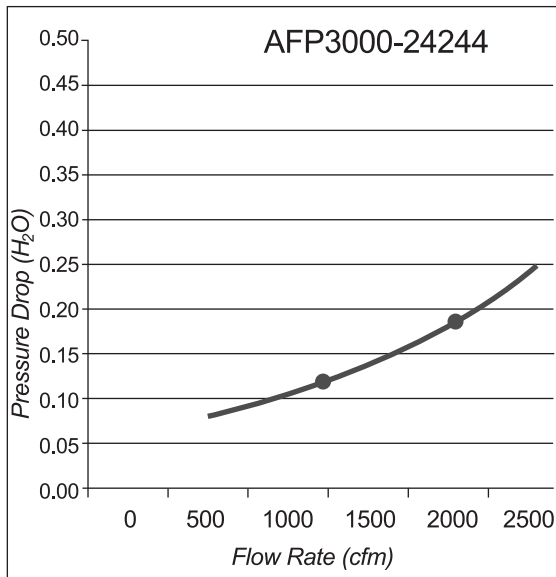



**Air Scrubbers, Inc.**<sup>TM</sup>  
 PO Box 2205      Ph: 919-718-5818  
 Sanford, NC 27331      Fax: 919-718-5819  
 info@airscrubbersinc.com

---

**Pleated Filter, 4" Nominal Depth  
 High Capacity, 25-30%  
 MERV 7-8**

---

Date 01/02/10	Model
Revision	<b>AFP3000-4</b>