


# Clean air...it's what we do

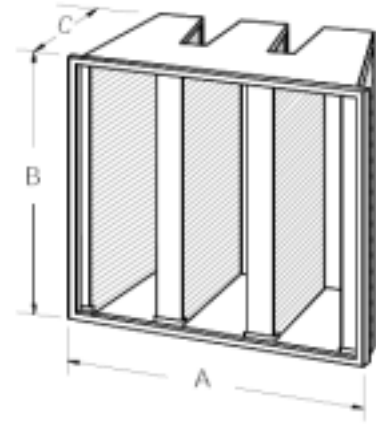

## Specifications

- Media: Synthetic Polypropylene Microfiber.
- Continuous polypropylene spacer beads thermally bonded to both sides of media.
- Frame: 100% polymer, no metal components.
- Frame to media adhesive: Solid, water-resistant adhesive.
- Frame Style: Single header
- Gasket Location: Upstream, downstream, both sides
- Efficiency: 90-95% per ASHRAE 52.1; MERV 14 per ASHRAE 52.2
- UL 900: Class 2 (standard)


### 3-V 95% - MERV 14

Model Number	Width "A"	Height "B"	Depth "C"
AF3V95-4412	23-3/8"	23-3/8"	11-1/2"
AF3V95-2412	11-3/8"	23-3/8"	11-1/2"
AF3V95-0412	19-3/8"	23-3/8"	11-1/2"

### Options:

- GU Gasket Upstream
- GD Gasket Downstream
- GS Gasket Sides
- 1 UL 900, Class 1

Example with options is AF3V95-4412-GU-1

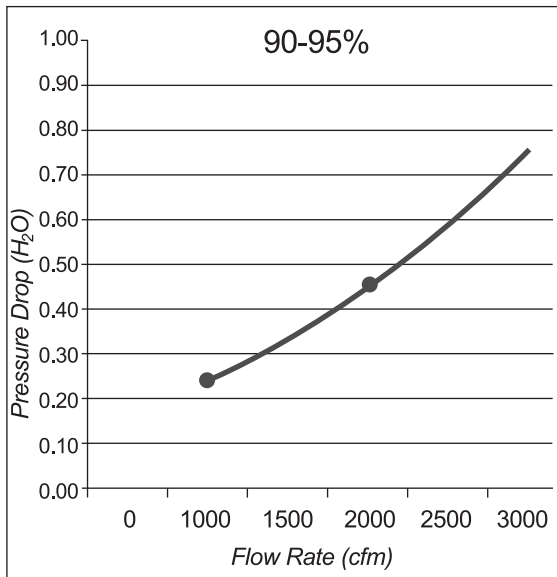

PO Box 2205 Ph: 919-718-5818  
 Sanford, NC 27331 Fax: 919-718-5819  
 info@airscrubbersinc.com

3-V 95%, MERV 14

Date  
01/02/10

Model

Revision

**AF3V95**