




# AN-30

Speaker Monitor

## Perfect for...

- Classrooms
- AV Carts
- Studio Monitor
- Conference Rooms
- Install & Integration Projects
- Marching Band
- Front Ensembles
- and more!

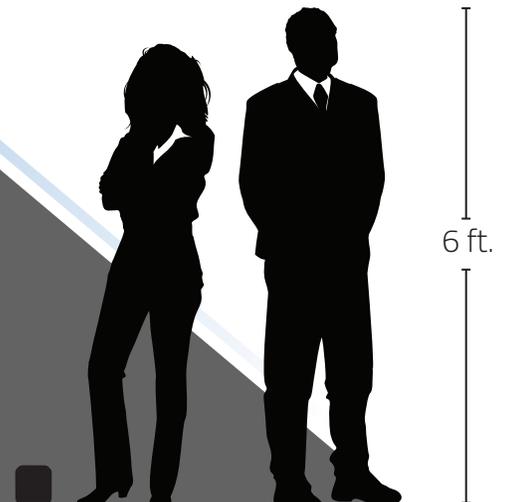

## TECH SPECS

- 100 dB of clear sound
- 30W AC
- 1.9 GHz wireless mic frequency
- 150' + wireless microphone range
- 1/4" mic input
- 3.5 mm AUX line input
- 3.5 mm AUX line output to daisy chain multiple units
- One 4.5" woofer

## FEATURES

- Reach crowds of 100+
- Connect up to two wireless mics
- Stand & bracket mountable
- Built-in bracket mount screws for easy installation (bracket with Allen wrench sold separately)




AN-30 Model & Packages	
AN-30	AN-30 powered speaker monitor (includes AC-30)
AN-30U2	AN-30 with built-in dual wireless mic receiver (includes AC-30)
AN-30CP	Includes AN-30, AC-30, and SB-30
AN-30BP	Includes AN-30U2, AC-30, and choice of one wireless handheld mic or headband and lapel mics with belt pack
Accessories	
MINI-15ST	Stereo mini-plug cable - 15 ft.
SB-30	180° tilt wall or ceiling mount bracket
SS-300	Speaker stand for AN-MINI, MiniVox Lite, and AN-30
AC-30	AN-MINI, MiniVox, and AN-30 adapter

Technical Specifications	
Rated Power Output	30 watts AC
Max SPL @ Rated Power	100 dB @ 1 meter
Frequency Response	100 Hz – 15 kHz ± 3 dB
Microphone Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	150' + line of sight
Speaker Type	4.5" Neodymium woofer
Line Out	Line level, 3.5 mm - stereo
Line In	Line level, 3.5 mm stereo & 1/4" phone - mono
DC Input Jack	12 - 20V, 2A Min
Dimensions (HWD)	5.5" x 6" x 5.5" (14 x 15.2 x 14 cm)
Weight	1.5 lbs / 0.68 Kg
Warranty	6 years



(AN-30 Back Panel)

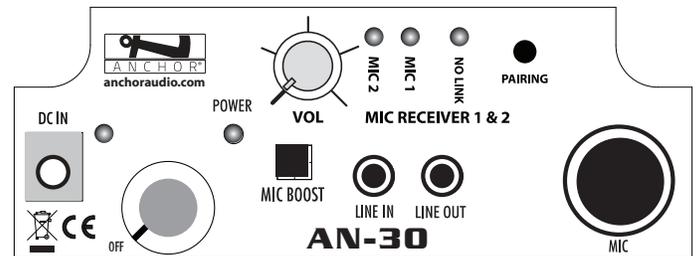

(AN-30U2 Back Panel)



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA