

ORWAK COMPACT 3110

COMPACT

THE ORWAK COMPACT 3110 is perfect for companies with small amounts of packaging waste. The low height in combination with the small footprint make it fit where you need it to be! It is a small but effective baler and it gives a volume reduction up to 7:1.



Complies to
EN 16500
Safety standard

ORWAK

Small footprint



50 kg
BALE WEIGHT
CARDBOARD

Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.



Why Orwak Compact?

- + Strong compaction on the spot! Requires little space, yet provides effective volume reduction
- + Easy-to-handle light weight bales
- + The best choice for small to medium size volumes of cardboard and plastic

ORWAK COMPACT 3110

Compact and versatile baler – fits where you need it!

SMALL FOOTPRINT


The low height in combination with the small footprint make the 3110 fit where you need it to be!

AUTOSTART FOR EFFICIENT COMPACTION

An autostart function allows the baler to start compacting the material as soon as you close the door.

MATERIAL SELECTOR

A material selector makes the choice between compacting cardboard and plastic easy.

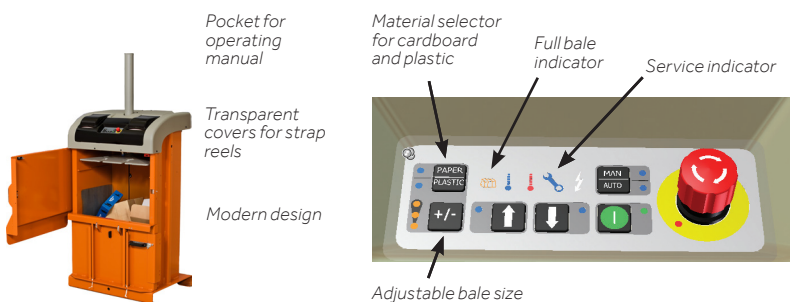

ORWAK COMPACT 3110 IS OPTIMIZED FOR:

PAPER

- + Cardboard
- + Shredded paper

PLASTIC FOIL

- + Shrink film
- + Plastic bags

OTHER METALS

- + Steel straps

OTHER PLASTICS

- + Plastic straps

ADJUSTABLE BALE SIZE

The cardboard bales weigh up to 50 kg and are easily handled with the ORWAK bale trolley. The 3110 offers adjustable bale height in three different sizes.

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Thanks to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

BALE TROLLEY INCLUDED


Model 3110 is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.

Complies with the EN 16500:2014 safety requirement standard for vertical balers

DIMENSIONS & SPECIFICATIONS

DIMENSIONS				
A	B	C	D	E
1990 mm	866 mm	680 mm	1365 mm	648 mm

ENERGY CONSUMPTION	
STANDBY MODE	MAXIMUM OPERATION ONE HOUR
0.6 W/H	580 W/H



Weight (machine) Total: 340 kg

TECHNICAL SPECIFICATIONS							
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 704 mm Height: 458 mm	33 secs	HP 4 ton, 40 kN LP 3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 600 mm	Cardboard: Up to 50 kg Plastic: Up to 70 kg	62.3 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.