

Compaction Trailer



EFFICIENT ROUTING
AND PAYLOADING.
TRANSFER INTEGRATION.

STORAGE

COLLECTION


TRANSFER



Compaction Trailer

Brought to you through a unique partnership between Nexgen Municipal and Haul-All

Features

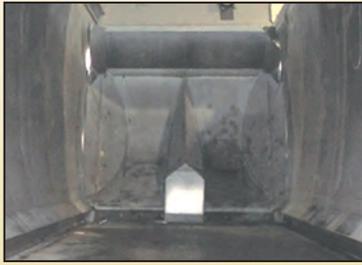

Programmable auto-pack system facilitates maximum payload with a specialized bullnose ram and 10.5" cylinder.



Specialized ram guides with high speed eject facilitates rapid turnaround.



Optional on board diesel engine powers Transtor and Compaction Trailer maximizing capacity and collection efficiency.



High-end Sauer Sundstrand hydraulic valve with a 100' radius radio remote.



Fully integrates with Haul-All Transtors to create a simple, low cost transfer system with a minimum of loading labour.



Specifications

Dimensions

Load Height	13.5 feet (4 110 m)
Hopper Width	14 feet (4 260 mm)
Length	48/ 51/ 53 feet (14.5/ 15.5/ 16 m)
Maximum Width	102 inches (2 590 mm)

Performance

Usable Capacity	85 to 100 yds ³
Loading Hopper Capacity	33 yds ³
6 Stage Packer Cylinder Diameter	10.5 inches (260 mm)
Full Eject Cycle Time	up to 5 minutes

Operating Pressure

Boost Pressure	1 850 psi (128 bar)
Power - Diesel Engine	2 100 psi (145 bar)
Base Weight	49 hp

39 000 to 44 000 lbs
(17 700 to 20 000 kg)

Distributor

Phone: 888-HAUL-ALL (428-5255) Fax: 403.328.9956
403.328.7788

E-mail: sales@haulall.com

www.haulall.com

Haul-All and "Integrating Waste Management" are Registered Trademarks.

