



Features

- 2700K-6000K tunable white light
- 24V DC fixtures link up to 96 watts
- Low profile design - less than 3/8" high
- Requires Trulux Tunable CCT control
- cETLus Listed for dry locations

Available Lengths

8" / 16" / 22" / 34"

CCT Range



2700K-6000K
Tunable CCT

Available Finish



White

Control Options

- Trulux Tunable CCT Controls
- Requires Adaptive Driver + Trulux Receiver

Listing / Ratings




Tunable EdgeLink Flat Panel - 24V

Super low-profile, high CRI LED flat panel fixtures are available in four sizes with 2700K-6000K tunable white light (requires Trulux Tunable CCT control system, sold separately). Linkable up to 96 watts to accommodate virtually any application. Tunable EdgeLink Panels feature 2700K-6000K Lume I FX technology (perfect for pairing with Tunable Pucks).


Technical Information

Series	EDGE-TW
Input Voltage	24V DC
CCT	2700K-6000K Tunable CCT
CRI	88/92+
Wattage	7W / 13W / 19W / 24W
Lumens	Up to: 340Lm / 675Lm / 1000Lm / 1200Lm
Beam Angle	120°
Max Run	Dependent on driver (linkable up to 96W max)
Dimmable	5-100% (requires Trulux Tunable CCT Control)
Mounting	Surface mount
Rating	cETLus Listed (dry locations)
Rated Life	35,000 hrs

4-11/32"W

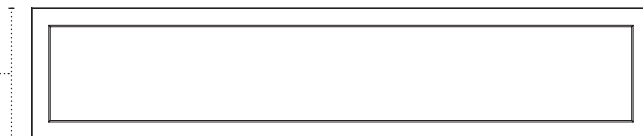

11/32"H



Tunable EdgeLink Flat Panel



EdgeLink LED Flat Panel
Tunable CCT 2700K-6000K

- EDGE-TW-8-WH** (8" / 7W / up to 340Lm)
- EDGE-TW-16-WH** (16" / 13W / up to 675Lm)
- EDGE-TW-22-WH** (22" / 19W / up to 1000Lm)
- EDGE-TW-34-WH** (34" / 24W / up to 1200Lm)

Tunable EdgeLink fixtures include: (1) 6' 20AWG Power Connector Wire with mounting tack nails / (1) End-to-end linking connector
(1) Magnetic mounting plate with Mounting screws

EdgeLink Accessories



Adaptive 24V Drivers

- ADPT-DRJ-30-24** (30W)
- ADPT-DRJ-60-24** (60W)
- ADPT-DRJ-96-24** (96W)
- ADPT-DRJ-192-24** (192W)
- ADPT-DRJ-288-24** (288W)



12' 20AWG Power Connector Wire
EDGE-CONKIT12 (12' / White)



Interconnectable Linking Cables

- EDGE-EX6-WH** (6" / White)
- EDGE-EX12-WH** (12" / White)
- EDGE-EX24-WH** (24" / White)

Trulux Tunable CCT Control w/Adaptive Driver Set-up



Push Dial Controller
(Single zone)

+




Adaptive LED Driver
(30W / 60W / 96W / 192W / 288W)

+



Trulux RF Receiver
(Required)

+



EdgeLink Flat Panel