




Features

- Custom built to specifications (allow 3-4 weeks lead time for special order)
- Transparent polycarbonate globes are shatterproof, weatherproof, and resistant to vibrations
- Rubber cable with injection molded nylon sockets supports spans up to 15 feet (use catenary cable for spans greater than 15 feet)
- cULus Listed
- Suitable for wet locations (IP68)

Available Globe Colors



Dimming Options

- Standard dimmers (Xenon only)

Listing / Ratings




Festoon Light String

Made to your specifications with watertight, shock resistant modules in either 12V DC LED or 24V AC Xenon versions. When ordering, specify lead wire and tail wire lengths; globe color (Clear is standard); and socket type and spacing. For span distances greater than 15 feet, utilize catenary cable (sold separately). For horizontal mount to a wall or for vertical mount to shine upwards from a ledge, use LFS-CABLE-CLIP.

Technical Information

Series	LFS
Input Voltage	12V DC (LED) / 24V AC, 60Hz (Xenon)
CCT	3000K / 2800K
CRI	74+ (LED) / 99+ (Xenon)
Wattage	Per Globe: 1.5W (LED) / 5W, 8.5W, 10W (Xenon)
Lumens	Up to 90Lm per ft (see individual product)
Max Run	300W (LED) / 600W (Xenon)
Cuttable	N/A
IP Rating	IP68
Dimmable	Not dimmable (LED) / Standard dimmers (Xenon)
Rating	cULus Listed for wet locations
Rated Life	80,000 hrs (LED) / 20,000 hrs (Xenon)

Festoon Light String

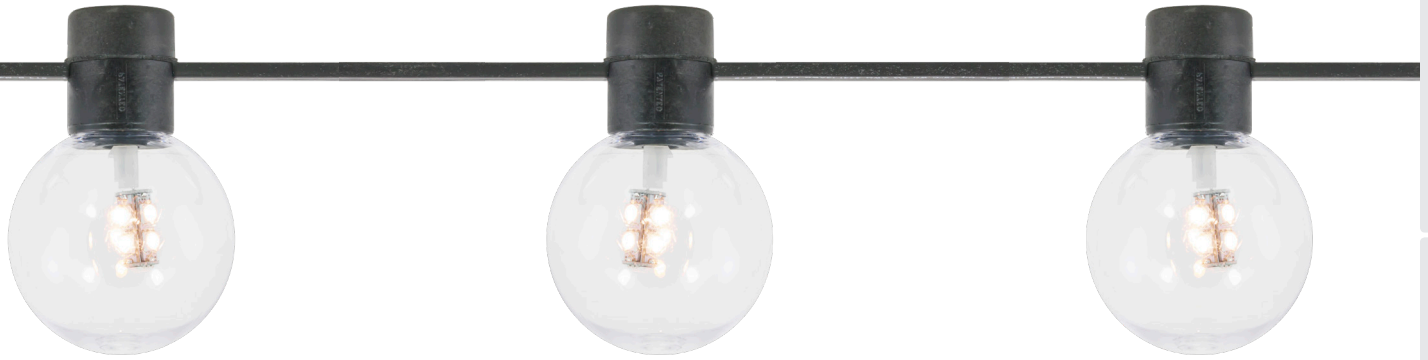

12V LED Festoon Socket Assembly
3000K / 80,000hr rated life
LFS-12V-1.5-LED-WW (1.5 watts)

24V Xenon Festoon Socket Assembly
2800K / 20,000hr rated life
LFS-24V-5W (5 watts)
LFS-24V-8.5W (8.5 watts)
LFS-24V-10W (10 watts)

When ordering Festoon Light String, be sure to specify socket spacing and total cable length (including lead and tail wire requirements). Designate the type of socket assembly to be factory-assembled on to stranded, tinned copper conductors in heavy-duty rubber cable. Festoon Light String is SPECIAL ORDER only; please allow 2-4 weeks for order processing. Request a sales quote online at <http://www.americanlighting.com/festoon-quote.html>.

Festoon Light String Accessories



12 gauge Festoon cable
Black; Heavy-duty rubber
LFS-CABLE



Mounting back-plate
Clear; with screw
LFS-BP



Cable Clips
Black; with nail (Qty of 100)
LFS-CABLE-CLIP



Replacement Festoon Globe
2-3/8" polycarbonate
LFS-GLOBE-CL (Clear)
LFS-GLOBE-BL (Blue)
LFS-GLOBE-PI (Pink)
LFS-GLOBE-PU (Purple)
LFS-GLOBE-RE (Red)
LFS-GLOBE-YE (Yellow)



24V Xenon Replacement Bulb
20,000hr rated life
LFS-5-24-CL (5 watts)
LFS-8.5-24-CL (8.5 watts)
LFS-10-24-CL (10 watts)

Recommended Power Supplies



12V DC Regulated Power Supply
Requires waterproof enclosure
LED-DR50-12-LU (50W driver)
LED-DR100-12-LU (100W driver)
LED-DR150-12-LU (150W driver)



24V AC Magnetic Transformer
NEMA 3R enclosure, cETLus Listed for outdoor use
TR-150-24 (60-150W capacity)
TR-600-24 (240-600W capacity)
TR-900-24 (360-900W capacity)