



Features

- 3000K color temperature
- High color rendering (85+ CRI)
- 350mA constant current operation
- 3" Diameter with 30° universal swivel
- Easy install with spring steel mounting tabs
- Dimmable with 350mA constant current driver
- Uses hub style (series) power distribution
- Suitable for indoor dry locations
- 50,000 hours rated life

Available Finishes



White Satin Aluminum Black

Dimming Options

- ELV dimmers or most CL dimmers with LED-DR18-350D2 (10-100%, up to 4 swivels)

Listing / Ratings


- Dry Location

LMS-3 Swivel

These high performing recessed swivels direct light where it's needed with a 25° beam angle. Use in display areas, in glass front cabinets, retail environments, and built-ins. Available in three finishes, with 3000K energy efficient light and a CRI of 85+. Use a variety of required hubs on the facing page, sold separately. For a daisy chain layout, use multiples of LED-CON2-350, filling each port with an LMS-3 or an end cap.

Technical Information

Series	LMS-3
Input Voltage	350mA
CCT	3000K
CRI	85+
Wattage	3.75W
Lumens	185Lm
Beam Angle	25°
Max Run	Up to 4 fixtures
Dimmable	10-100% (requires LED-DR18-350D2)
Mounting	Recess mount (2-3/4" cut-out)
Rating	Dry location
Rated Life	50,000 hrs

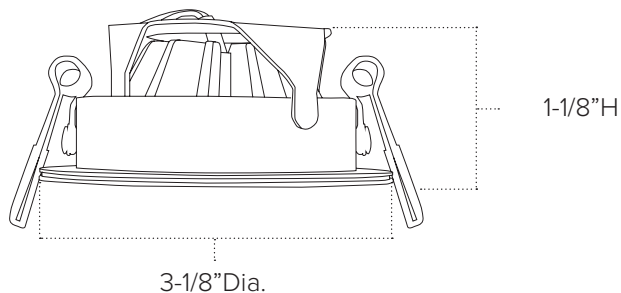

LMS-3 Swivel



LMS-3 Swivel - White
3.75W / 185Lm

LMS-3-WH



LMS-3 Swivel - Satin Aluminum
3.75W / 185Lm

LMS-3-AL



LMS-3 Swivel - Black
3.75W / 185Lm

LMS-3-BK

LMS-3 Swivels Include: (1) 38" lead wire with 350mA connector

LMS-3 Swivel Accessories



6-Port Hub
78" lead / 3 terminal plugs

LED-CON6-350



3-Port Hub
78" lead / 1 terminal plug

LED-CON3-350



2-Port Hub
78" lead


LED-CON2-350



Terminal Plug
Use to fill ports on hubs

LED-END-350

LMS-3 Swivel Power Supplies



350mA 18W Hardwire Driver
120-277V AC input / Class 2
cURus / Dimmable (1-4 fixtures)

LED-DR18-350D2



350mA 16W Hardwire Driver
100-240V AC input / Class 2
cURus / Non-dimming (1-3 fixtures)

LED-DR16-350



350mA 6W Hardwire Driver
100-277V AC input / Class 2
cURus / Non-dimming (1 fixture)

LED-DR6-350

For more information on 350mA power supplies, see pages 240-242