



SAFETY CANS


For nearly 60 years, our Safety Can product line has been an industry leader of galvanized Type I and Type II Safety Cans that meet OSHA and NFPA Code 30 requirements, and are UL and ULC listed and FM Approved for safe storage and handling of flammable liquids. Eagle offers FM Approved Compliance Solutions in a variety of poly and stainless cans, lab cans, faucet cans, disposal cans, plunger, bench & daub cans, and poly oily waste cans to help keep your personnel and facilities protected. Made in the USA.

Safety Can options:

- Type I Safety Cans
- Type II Safety Cans
- Type I Poly Cans
- Stainless Cans
- Lab Cans
- Faucet Cans
- DOT Cans
- Disposal Cans
- Specialty Cans
- Plunger Cans
- Bench Cans
- Daub Cans
- Poly Oily Waste Cans
- Biohazardous Cans



Patented comfort grip trigger release plus spring closing lid with nitrile gasket that vents at 5-PSI internal pressure



Double interlock no-weld bottom seam is the only deep drawn seamless can made

SAFETY CANS



SIMPLY CANTASTIC!

Baked-on Powder Coat Finish + 100 Percent Leak Tested!

Featuring Environmentally Friendly Hot Dipped 24-Gauge Galvanized Steel

Patented Comfort Grip Trigger Release

Spring Closing Lid With Nitrile Gasket That Vents at 5-PSI Internal Pressure

Fixed Handle

Non-Sparking Flame Arrestor and Pour Spout

Baked-on Powder Coat Finish

Available in 1- (3.8 L), 2- (7.6 L), 2.5- (9.5 L) & 5-Gallon (18.9 L) Sizes

Meet OSHA & NFPA Code 30 Requirements

FM, UL & ULC Approved

Accepted Under CARB

Double Interlock No-Weld Bottom Seam

Optional F15 HDPE Funnel Fits Unleaded Fuel Tanks

The Only Deep Drawn Seamless Can Made

Deep Drawn Construction Means No Top or Side Seam

Trilingual Label




Model UI50FS 12½ in. (31.8 cm.) x 13½ in. (34.3 cm.)



FLAMMABLE



DIESEL

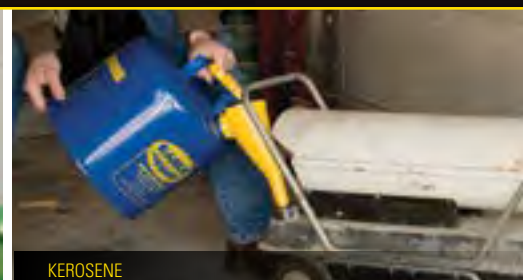

KEROSENE

SAFETY CANS

TYPE I SAFETY CANS



FLAMMABLES

Model Numbers	UI4S ▲	UI10S ▲	UI20S ▲	UI25S* ▲	UI50S ▲
Model-w/Funnel	UI4FS ▲	UI10FS ▲	UI20FS ▲	UI25FS* ▲	UI50FS ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions <small>Diameter Height</small>	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13½ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

TYPE I SAFETY CANS



DIESEL

Model Numbers	UI4SY ▲	UI10SY ▲	UI20SY ▲	UI25SY* ▲	UI50SY ▲
Model-w/Funnel	UI4FSY ▲	UI10FSY ▲	UI20FSY ▲	UI25FSY* ▲	UI50FSY ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions <small>Diameter Height</small>	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13½ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

Type I Safety Cans

- Eagle Type 1 Safety Cans are constructed of 24-gauge hot dipped galvanized steel, whereas other manufacturers' safety cans use lead-coated terne steel
- These safety cans are accepted under CARB, meet OSHA and NFPA Code 30 requirements, and are UL, ULC and FM Approved for safe handling and storage of gasoline and other flammable liquids
- Available in a variety of colors for the safe handling and storage of kerosene (blue), diesel (yellow) and combustible liquids such as oils (green)

* Meets the New York City Fire Code Title 29 FC 2204.4.4.1.1 Maximum 2.5 gallon (9.5 L) container regulations

Compliance: OSHA 29 CFR 1910.106, 1926.152 and NFPA Code 30





TYPE I SAFETY CANS



Model Numbers	UI4SB ▲	UI10SB ▲	UI20SB ▲	UI25SB* ▲	UI50SB ▲
Model-w/Funnel	UI4FSB ▲	UI10FSB ▲	UI20FSB ▲	UI25FSB* ▲	UI50FSB ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13⅞ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

Model Numbers	UI4SB ▲	UI10SB ▲	UI20SB ▲	UI25SB* ▲	UI50SB ▲
Model-w/Funnel	UI4FSB ▲	UI10FSB ▲	UI20FSB ▲	UI25FSB* ▲	UI50FSB ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13⅞ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

TYPE I SAFETY CANS



Model Numbers	UI4SG ▲	UI10SG ▲	UI20SG ▲	UI25SG* ▲	UI50SG ▲
Model-w/Funnel	UI4FSG ▲	UI10FSG ▲	UI20FSG ▲	UI25FSG* ▲	UI50FSG ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13⅞ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

Model Numbers	UI4SG ▲	UI10SG ▲	UI20SG ▲	UI25SG* ▲	UI50SG ▲
Model-w/Funnel	UI4FSG ▲	UI10FSG ▲	UI20FSG ▲	UI25FSG* ▲	UI50FSG ▲
Capacity	2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
Dimensions	9 in./22.9 cm. 5⅝ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9⅞ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13⅞ in./34.3 cm.
Weight	2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

TYPE I POLY CANS

TYPE I STAINLESS STEEL CANS



Model Numbers	14169	14545 ▲	14261	14561	14535 ▲	14540 ▲	1313	1315
Capacity	1 gal./4 L	5 gal./19 L	2.5 gal./9.5 L	5 gal./19 L	5 gal./19 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L
Dimensions	7¼ in./184 mm. 11½ in./292 mm.	11½ in./292 mm. 17 in./432 mm.	10¾ in./273 mm. 14¼ in./362 mm.	12¾ in./324 mm. 16 in./406 mm.	11½ in./292 mm. 17 in./432 mm.	11½ in./292 mm. 17 in./432 mm.	11¼ in./28.6 cm. 9⅞ in./24.5 cm.	11¼ in./28.6 cm. 15⅞ in./39.7 cm.
Weight	3 lbs./1 kg.	10 lbs./4 kg.	4 lbs./2 kg.	9 lbs./4 kg.	16 lbs./7 kg.	10 lbs./4 kg.	8 lbs./3.7 kg.	10 lbs./4.6 kg.
Construction	Poly	Poly	Poly	Poly	Poly	Poly	Stainless	Stainless

Model Numbers	14169	14545 ▲	14261	14561	14535 ▲	14540 ▲	1313	1315
Capacity	1 gal./4 L	5 gal./19 L	2.5 gal./9.5 L	5 gal./19 L	5 gal./19 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L
Dimensions	7¼ in./184 mm. 11½ in./292 mm.	11½ in./292 mm. 17 in./432 mm.	10¾ in./273 mm. 14¼ in./362 mm.	12¾ in./324 mm. 16 in./406 mm.	11½ in./292 mm. 17 in./432 mm.	11½ in./292 mm. 17 in./432 mm.	11¼ in./28.6 cm. 9⅞ in./24.5 cm.	11¼ in./28.6 cm. 15⅞ in./39.7 cm.
Weight	3 lbs./1 kg.	10 lbs./4 kg.	4 lbs./2 kg.	9 lbs./4 kg.	16 lbs./7 kg.	10 lbs./4 kg.	8 lbs./3.7 kg.	10 lbs./4.6 kg.
Construction	Poly	Poly	Poly	Poly	Poly	Poly	Stainless	Stainless

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

SAFETY CANS

TYPE II SAFETY CANS



	FLAMMABLES		KEROSENE		DIESEL		COMBUSTIBLES	
Model 7/8" Spout	U226S	U251S	U226SB	U251SB	U226SY	U251SY	U226SG	U251SG
Model 5/8" Spout	U226SX5	U251SX5	U226SX5B	U251SX5B	U226SX5Y	U251SX5Y	U226SX5G	U251SX5G
Capacity	2½ gal./9.5 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L
Dimensions <small>Diameter Height</small>	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.
Weight	8 lbs./3.7 kg.	10 lbs./4.6 kg.	8 lbs./3.7 kg.	10 lbs./4.6 kg.	8 lbs./3.7 kg.	10 lbs./4.6 kg.	8 lbs./3.7 kg.	10 lbs./4.6 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized



Model 7/8" Spout	U211S	U211SB	U211SY	U211SG
Model 5/8" Spout	U211SX5	U211SX5B	U211SX5Y	U211SX5G
Capacity	1 gal./3.8 L	1 gal./3.8 L	1 gal./3.8 L	1 gal./3.8 L
Dimensions <small>Diameter Height</small>	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.
Weight	7 lbs./3.2 kg.	7 lbs./3.2 kg.	7 lbs./3.2 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized



- Eagle Type II Safety Cans are made of galvanized steel and help reduce the danger of explosion while dispensing flammable liquids through a flexible 12 in. (30.5 cm.) metal spout
- Flame arrestors in filler opening and pour spout







Compliance: OSHA 29 CFR 1910.106, 1926.152 and NFPA Code 30

















- Metal Safety Cans are FM, UL and ULC Approved and meet OSHA and NFPA Code 30 requirements. Poly Cans are FM Approved.





	STAINLESS		POLY	
				
Model Numbers	1301		12162	14065
Approvals				—
Capacity	1 gal./3.8 L		1 gal./4 L	½ gal./2 L
Dimensions Width Depth Height	4¼ in./10.8 cm. 8 in./20.4 cm. 13 in./33.1 cm.		4¼ in./117 mm. 7¾ in./194 mm. 12¾ in./324 mm.	4¼ in./117 mm. 7¾ in./194 mm. 12¾ in./324 mm.
Weight	3.75 lbs./1.7 kg.		2 lbs./1 kg.	2 lbs./1 kg.
Construction	Stainless		Poly	Poly

	FAUCET CANS			DOT CANS		
						
Model Numbers	1417 	1327	1215 	1215SX5 	1215Y 	1215YSX5 
Approvals			—	—	—	—
Capacity	5 gal./19 L	5 gal./19 L	5 gal./19 L	5 gal./19 L	5 gal./19 L	5 gal./19 L
Dimensions Diameter Height	12½ in./31.8 cm. 13½ in./34.3 cm.	11¼ in./28.6 cm. 15½ in./40.4 cm.	12½ in./31.8 cm. 15¾ in./40 cm.	12½ in./31.8 cm. 15¾ in./40 cm.	12½ in./31.8 cm. 15¾ in./40 cm.	12½ in./31.8 cm. 15¾ in./40 cm.
Weight	12 lbs./5.5 kg.	9 lbs./4.1 kg.	13 lbs./5.9 kg.	13 lbs./5.9 kg.	13 lbs./5.9 kg.	13 lbs./5.9 kg.
Construction	Galvanized	Stainless	Galvanized	Galvanized	Galvanized	Galvanized

Laboratory Safety Cans:

- Laboratory Safety Cans reduce the danger of explosions resulting from the ignition of vapors of flammable liquids
- Cans are available in coated metal, stainless steel and high-density polyethylene for safe storage and handling of most chemical compounds

Compliance: OSHA 29 CFR 1910.106, 1925.152 & NFPA Code 30

DOT Transport Type II Safety Cans:







- Reduce the danger of explosion while dispensing flammable liquids through a flexible metal spout
- Have double-walled flame arrestors in filler opening and pour spout
- Heavy duty roll bars protect both spouts, and a thumb screw mechanism assures the filler opening stays closed while being transported
- Meet DOT requirements

Compliance: OSHA 29 CFR 1910.106, 1925.152 & NFPA Code 30 - UN/DOT-1A1/Y1.2/100/08/USA/M4990/0.6mm

SAFETY CANS

DISPOSAL CANS

















						
Model Numbers	14762	14765	12751	12754	14565	12772
Approvals						
Capacity	2 gal./7.5 L	5 gal./19 L	2 gal./7.5 L	5 gal./19 L	5 gal./19 L	5 gal./19 L
Dimensions <small>Diameter Height</small>	12 in./305 mm. 14¼ in./375 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 14¼ in./375 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 20 in./508 mm.
Weight	7 lbs./3 kg.	11 lbs./5 kg.	7 lbs./3 kg.	11 lbs./5 kg.	11 lbs./5 kg.	12 lbs./6 kg.
Construction	Poly	Poly	Poly	Poly	Poly	Poly

DISPOSAL CANS

SPECIAL CANS



						
Model Numbers	1423 	1425 	1323 	1325 	605 Lift Oil Can	211 Tallow Pot
Approvals					-	-
Capacity	2½ gal./9.5 L	5 gal./19 L	2½ gal./9.5 L	5 gal./19 L	5 gal./19 L	4 pt./3.4 L
Dimensions <small>Diameter Height</small>	11¼ in./28.6 cm. 12 in./30.5 cm.	11¼ in./28.6 cm. 18 in./45.8 cm.	11¼ in./28.6 cm. 12 in./30.5 cm.	11¼ in./28.6 cm. 18 in./45.8 cm.	11¼ in./28.6 cm. 38 in./96.6 cm.	5¼ in./13.3 cm. 7½ in./19 cm.
Weight	8 lbs./3.7 kg.	10 lbs./4.6 kg	8 lbs./3.7 kg.	10 lbs./4.6 kg.	10 lbs./4.6 kg.	2 lbs./0.9 kg.
Construction	Galvanized	Galvanized	Stainless	Stainless	Galvanized	Coated Metal

Metal & Polyethylene Disposal Safety Cans:

- Disposal Safety Cans provide an intermediate station for temporary storage of liquid wastes
- Spout cap opens to a wide 80° angle and can be locked open for conveniently emptying various types of containers
- Cans are equipped with a flame arrestor
- Cap assembly opens automatically to relieve excessive internal vapor pressures
- FM Approved





PLUNGER CANS



	METAL			POLY		
Model Numbers	P701 ▲	P702 ▲	P704 ▲	P711 ▲	P712 ▲	P714 ▲
Approvals						
Capacity	1 qt./1 L	2 qt./1.9 L	4 qt./3.8 L	1 qt./1 L	2 qt./1.9 L	4 qt./3.8 L
Dimensions <small>Diameter Height</small>	6 1/4 in./15.9 cm. 8 in./20.4 cm.	8 in./20.4 cm. 8 1/2 in./21.6 cm.	8 in./20.4 cm. 10 1/4 in./27.3 cm.	5 1/4 in./13.4 cm. 9 1/4 in./24.8 cm.	6 1/2 in./16.6 cm. 11 in./28 cm.	7 1/4 in./19.7 cm. 13 in./33 cm.
Weight	2.34 lbs./1.1 kg.	3 lbs./1.4 kg.	3.67 lbs./1.7 kg.	2 lbs./0.9 kg.	3 lbs./1.4 kg.	4 lbs./1.9 kg.
Construction	Galvanized	Galvanized	Galvanized	Poly	Poly	Poly

BENCH & DAUB CANS



	DAUB			BENCH			
Model Numbers	B600D	B601	B602	B604	B606	B606NL	B608
Approvals							
Capacity	1/2 pt./0.2 L	1 qt./1 L	2 qt./1.9 L	4 qt./3.8 L	6 qt./5.7 L	6 qt./5.7 L	8 qt./7.6 L
Dimensions <small>Diameter Height</small>	4 1/4 in./10.8 cm. 3 1/2 in./8.9 cm.	6 1/4 in./15.9 cm. 3 3/4 in./9.2 cm.	8 in./20.4 cm. 4 1/4 in./10.8 cm.	8 in./20.4 cm. 6 1/2 in./16.6 cm.	7 3/4 in./19.7 cm. 9 1/2 in./24.2 cm.	7 3/4 in./19.7 cm. 9 1/2 in./24.2 cm.	11 1/4 in./28.6 cm. 7 in./17.8 cm.
Weight	1 lb./0.5 kg.	2.17 lbs./1 kg.	3 lbs./1.4 kg.	3.5 lbs./1.6 kg.	3.67 lbs./1.7 kg.	3.67 lbs./1.7 kg.	8.25 lbs./3.8 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

Optional cleaning basket shown is available for both models

Plunger & Bench Safety Cans:

- Eagle Safety Plunger Cans are ideal for cleaning with flammable or volatile fluids
- Feature flame arrestor dasher screens, brass pump assemblies, and comply with OSHA standards
- When the dasher plate is pushed down, the safety can dispenses a small amount of liquid to easily moisten sponges or rags without messy or dangerous spills
- Polyethylene and coated metal models available
- FM Approved
- Eagle Safety Bench Cans are designed for safer cleaning of small parts or swabbing of larger ones
- Dasher screens act as a fire baffle



SAFETY CANS

POLY WASTE CANS

							
Model Numbers	933FL	935FL	937FL	933FLY	935FLY	937FLY	
Approvals							
Capacity	6 gal./22.8 L	10 gal./37.9 L	14 gal./53 L	6 gal./22.8 L	10 gal./37.9 L	14 gal./53 L	
Dimensions	Width Depth Height	16½ in./42 cm. 13½ in./34.3 cm. 16 in./40.7 cm.	22 in./55.9 cm. 18 in./45.8 cm. 18 in./45.8 cm.	22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.	16½ in./42 cm. 13½ in./34.3 cm. 16 in./40.7 cm.	22 in./55.9 cm. 18 in./45.8 cm. 18 in./45.8 cm.	22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.
Weight	9 lbs./4.1 kg.	14 lbs./6.4 kg.	16 lbs./7.3 kg.	9 lbs./4.1 kg.	14 lbs./6.4 kg.	16 lbs./7.3 kg.	

POLY WASTE CANS

BIOHAZARDOUS POLY WASTE CANS

							
Model Numbers	933FLBK	935FLBK	937FLBK	943BIO	945BIO	947BIO	
Approvals							
Capacity	6 gal./22.8 L	10 gal./37.9 L	14 gal./53 L	6 gal./22.8 L	10 gal./37.9 L	14 gal./53 L	
Dimensions	Width Depth Height	16½ in./42 cm. 13½ in./34.3 cm. 16 in./40.7 cm.	22 in./55.9 cm. 18 in./45.8 cm. 18 in./45.8 cm.	22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.	16½ in./42 cm. 13½ in./34.3 cm. 16 in./40.7 cm.	22 in./55.9 cm. 18 in./45.8 cm. 18 in./45.8 cm.	22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.
Weight	9 lbs./4.1 kg.	14 lbs./6.4 kg.	16 lbs./7.3 kg.	9 lbs./4.1 kg.	14 lbs./6.4 kg.	16 lbs./7.3 kg.	

Polyethylene Oily Waste Cans:

- Fire-safe temporary storage of solvent rags, waste rags, shavings and other materials

Compliance: OSHA 29 CFR 1910.125(e)(4)(ii) and OSHA 29 CFR 1910.125(e)(4)(iii)

Polyethylene Biohazardous Waste Cans:

- Advise workers of potential biohazards and meet OSHA requirements for exposures to blood borne pathogens

Compliance: OSHA 29 CFR 1910.1030

Can be used with or without a liner

Fire-safe temporary storage of solvent rags, waste rags, shavings and other materials subject to spontaneous combustion

Polyethylene construction won't rust or dent and is resistant to most chemical compounds – heavy-wall HDPE construction

Meets OSHA and NFPA Code 30 requirements and are accepted for temporary storage of oily waste materials

Flared base for added stability



Self-closing lid

Molded handles for easy handling

No seam, leakproof construction

Exceeds FM standards for impact, stability & fire testing

Exceeds performance standards at temperatures between -40° F (4.4° C) & 140° F (54.4° C)

Hands-free foot lever



SAFESMOKER™ & Butt Cans

SafeSmoker™ Cigarette Receptacle is made of high-density polyethylene with UV inhibitors, with a galvanized steel collection bucket inside. Design restricts oxygen to quickly extinguish burning butts. Top of container removes easily to access and empty internal bucket. Rain-protective design keeps water out and eliminates odor. Includes integrated hold-down tabs for security and wind protection.

Eagle Butt Cans are ideal for “designated smoking areas” inside or outside. Features poly tube and galvanized can base. Yellow for in-plant use and beige for office or commercial areas.

Original Butt Cans This all-metal galvanized steel can is excellent for smoking areas in industrial settings. 5-gallon (18.9 L) capacity in yellow or beige.



Model	Description	SafeSmoker™ Cigarette Receptacle Dimensions (dia. x height)	Capacity	Weight
1208BEIGE	SafeSmoker™-Beige	in: 17¼ x 43¼ cm: 43.8 x 109.9	4 gal./15.2 L	10 lbs./4.5 kg.
1208BROWN	SafeSmoker™-Brown	in: 17¼ x 43¼ cm: 43.8 x 109.9	4 gal./15.2 L	10 lbs./4.5 kg.
1208GRAY	SafeSmoker™-Gray	in: 17¼ x 43¼ cm: 43.8 x 109.9	4 gal./15.2 L	10 lbs./4.5 kg.
1208BLACK	SafeSmoker™-Black	in: 17¼ x 43¼ cm: 43.8 x 109.9	4 gal./15.2 L	10 lbs./4.5 kg.
1206BEIGE	SafeSmoker™-Beige	in: 15¼ x 37¼ cm: 38.8 x 95.9	5 qt./4.7 L	7 lbs./3.2 kg.
1206BROWN	SafeSmoker™-Brown	in: 15¼ x 37¼ cm: 38.8 x 95.9	5 qt./4.7 L	7 lbs./3.2 kg.
1206GRAY	SafeSmoker™-Gray	in: 15¼ x 37¼ cm: 38.8 x 95.9	5 qt./4.7 L	7 lbs./3.2 kg.
1206BLACK	SafeSmoker™-Black	in: 15¼ x 37¼ cm: 38.8 x 95.9	5 qt./4.7 L	7 lbs./3.2 kg.

Capacity	Dimensions	Metal/Poly Butt Cans			Weight
		Yellow	Beige	Black	
2 gal./7.58 L	in: 11 x 35 cm: 27.9 x 88.9	1202	1202BEI	1202BLK	5 lbs./2.3 kg.
5 gal./18.9 L	in: 12 x 40 cm: 30.5 x 101.6	1205	1205BEI	1205BLK	7 lbs./3.2 kg.

Capacity	Dimensions	Original Butt Can		Weight
		Yellow	Beige	
5 gal./18.9 L	in: 12 x 33 cm: 30.5 x 83.8	1200YELLOW	1200BEIGE	7 lbs./3.2 kg.

Model	Description	Decorative SafeSmoker™		Capacity	Weight
		Dimensions			
1212BLACK	SafeSmoker™-Hitching Post	in: 12½ x 44¼ cm: 31.8 x 111.8		2 gal./7.58 L	18 lbs./8.2 kg.
1213BLACK	SafeSmoker™-Classic	in: 12½ x 37 cm: 31.8 x 94		2 gal./7.58 L	18 lbs./8.2 kg.

SHIPPING SIZES:

	L x W x H
1200	in: 13 x 13 x 20 cm: 33.1 x 33.1 x 50.8
1202	in: 13 x 13 x 28 cm: 33.1 x 33.1 x 71.2
1205	in: 13 x 13 x 28 cm: 33.1 x 33.1 x 71.2
1206	in: 16 x 16 x 21 cm: 40.7 x 40.7 x 53.4
1208	in: 17½ x 17½ x 25 cm: 44.5 x 44.5 x 63.5

All are shipped UPS.

All cans are FM Approved.

1206BLACK
5 qt./4.7 L
in: 15¼ x 37¼
cm: 38.8 x 95.9

1208BLACK
4 gal./15.2 L
in: 17¼ x 43¼
cm: 43.8 x 109.9

1213BLACK
2 gal./7.58 L
in: 12½ x 37
cm: 31.8 x 94

Container top removes easily to empty internal galvanized steel bucket.

