



POLY-SPILLCART™ GET ON THE MOVE!

Transporting 55-gallon drums, pails, paint cans, and other materials around your plant with full containment, has never been easier. Poly-Spillcart™ eliminates the risk of accidents during transport with its large spill capacity.

Poly-Spillcart™'s caster wheels help you move around freely while its ergonomically-designed handle makes maneuvering a breeze. A tray for tool storage keeps tools handy while the structural foam grate removes for easy cleaning. Features drain plug and lets you empty the sump without effort.



POLY-SPILLCART™ ATC



Need an even more rugged Poly-Spillcart for outdoor terrain? Poly-Spillcart™ is available in an All-Terrain Cart (ATC). The Poly-Spillcart™ ATC's heavy-duty solid rubber wheels and durable axle are designed to handle even the most demanding environments smoothly and with ease. Wheel brakes are not available with the ATC model.



Large internal sump holds incidental spills.



Built-in tool tray keeps tools and other small objects easily accessible.


POLY-SPILLCART™

Part #	Description	Dimensions L x W x H in. (cm) w/ handle	Dimensions L x W x H in. (cm) w/o handle	Weight lb. (kg)	Spill Cap. gal. (L)	Load Cap. lb. (kg)
5200-YE	Spillcart	66.5 x 29 x 43.9 (169 x 74 x 112)	62.75 x 29 x 13.13 (159 x 74 x 33)	115 (52.2)	57 (215.7)	500 (227)
5200-YE-A	Spillcart ATC	66.5 x 29 x 46.9 (169 x 74 x 119)	62.75 x 29 x 16 (159 x 74 x 41)	123 (55.8)	57 (215.7)	500 (227)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES

SPILL SCOOTER™ THE ORIGINAL MOBILE DISPENSING SCOOTER.

Thanks to the Spill Scooter™, dispensing from drums while transporting them around the plant is no longer a problem! Spill Scooter™ provides secondary containment for incidental spills and drips that often occur during vertical dispensing applications and are contained in the well with a pour spout for easy draining. Spill Scooter™ fits all drums up to 55 gallons and is made of 100% polyethylene that will not rust or corrode.

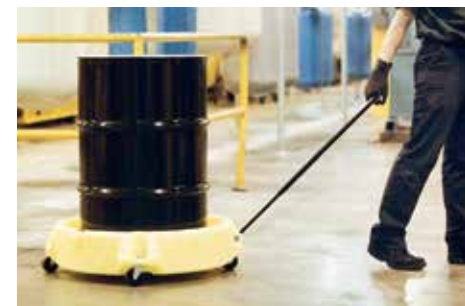

Shown with optional metal T-Handle (Part # 5206-BK).

SPILL SCOOTER™


Part #	Description	Ext. Dimension in. (cm)	Int. Dimension in. (cm)	Weight lb. (kg)	Spill Cap. gal. (L)	Load Cap. lb. (kg)
5205-YE	Scooter	35 x 8.75 (88 x 22)	27.25 x 5.5 (69 x 14)	22 (10)	11 (41.6)	500 (227)
5206-BK	Handle	36.62 x 10 (93 x 25)		4 (1.8)		

Regulations: SPCC and NPDES

POLY-LABTRAY™ BRINGS SPILL PROTECTION TO THE LABORATORY BENCH.

Poly-Labtray™ reduces spills and overflows of liquid and free-flowing powder chemicals during transfer of material in the laboratory. The large surface holds four (4) 1-gallon bottles (up to 40 lb. static load weight) and features a 2.5 gallon sump capacity. This also makes it perfect for mixing small containers at production sites. There are no metal parts to rust or corrode.

- Low-profile unit is only 3" high
- Small 25" x 21.5" footprint

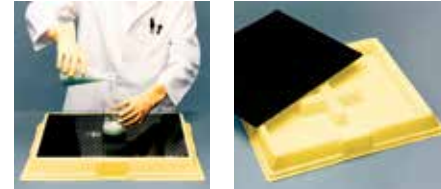

- Controls spills as they happen
- Removable grate for easy pen.

POLY-LABTRAY™

Part #	Description	Dimensions L x W x H in. (cm)	Weight lb. (kg)	Spill Cap. gal. (L)	Load Cap. lb. (kg)
5248-YE	Lab tray	25.5 x 22 x 3.25 (65 x 56 x 8)	4 (1.8)	2.5 (9.4)	40 (18)
	(Grate)	20.75 x 17.25 (53 x 44)			

Regulations: EPA, SPCC and NPDES

Q-VAC™ 100 SHOWN WITH OPTIONAL DRUM AND SCOOTER

Reliable and easy-to-use, Q-VAC™ 100 pumps liquid directly into a standard drum for convenient storage or recycling. A liquid overflow shutoff valve ensures vacuum automatically turns off when the drum is full. QVAC 100™ Plus includes Spill Scooter.

MORE Q-VAC™ 100 ADVANTAGES

- Works on shop air.
- Fits on a standard 55-gallon closed top drum
- Requires no filters
- No moving parts to break or replace



Q-VAC 100™ Plus (drum optional, but not included)



Q-VAC 100

Q-VAC 100™

Part #	Description	Air Flow at 87 psi	Compressor PSI (Minimum/Optimum)	Sound Level	Optimum Compressor
QVAC	Standard	35 cfm	30 / 87 psi	80 dB (A)	10 HP
QVAC PLUS	Plus (w/ Scooter)	35 cfm	30 / 87 psi	80 dB (A)	10 HP
8089-BK	Steel Closed Head Drum				

ENHANCED DESIGN



DRUMS-UP™ THE INCIDENTAL SPILL SOLUTION.

Need temporary protection against incidental barrel spills? Drums-Up™ and Drums-Up Jr.™ let you control nuisance spills from drums sized up to 55 gallons. A 20-gallon spill capacity catches liquid before it reaches your floor and reduces the risk of slip-and-fall injuries. Includes a newly enhanced convenient pour spout and built-in bung fitting holder.

Perfect for use as a drum pumping station!



Built-in bung fitting holder



Convenient pour spout

DRUMS-UP JR.™

Inexpensive containment for 16-gallon drums, 5-gallon pails and various jugs and bottles.



DRUMS-UP™

Part #	Description	Top Dia. in. (cm)	Bottom Dia. in. (cm)	Ht. in. (cm)	Weight lb. (kg)	Spill Cap. gal. (L)
8091-YE	Drums-Up	Int. 30.5 (77) Ext. 37.5 (95)	Int. 26.25 (67) Ext. 28.5 (72)	7.5 (19)	6.1 (2.8)	20 (75.7)
8200-YE	Drums-Up Jr.	Int. 18.5 (47) Ext. 22.75 (58)	Int. 15.5 (39) Ext. 17.25 (44)	7.5 (19)	2 (0.9)	7.5 (28.3)

Regulations: EPA, SPCC and NPDES