



STINGER SNAP-FOAM BERM™

TRUE DRIVE-IN/DRIVE-OUT CAPABILITY



After one-time setup, the ENPAC® Snap-Foam Berm allows for continual drive in and out without ever having to modify the sidewalls! The Foam Sidewall system consists of (PE) polyethylene foam encased in a fuel and chemical resistant membrane cover. The end sidewall design incorporates high strength connectors and a system that facilitates automatic entry and exit without assistance. The foam logs utilized with this system ensure that tankers may move at will. The Snap-Foam Berm is manufactured and tested to the most stringent quality controls. The Snap-Foam Berm is made of the highest quality material in the industry. Custom sizes available, standard color is black.

- True drive in/drive out capability
- Easy-to-assemble design permits immediate response
- Compact storage and transport
- Air-lance tested containment welds for maximum product performance
- Foam end caps form system to snap end sidewalls back to their upright position
- Cold rated to -30° F/-34° C
- Lap joint welds for maximum strength
- Individual serial numbers
- CAD designed and cut components
- Fuel/chemical resistant containment area
- Custom sizes and special materials available

Custom sizes and special materials available.



Shown with TracMat™

Detail view

SEE PG 74 FOR CHEMICAL COMPATIBILITY GUIDE



BERM ACCESSORIES:
GROUND PAD, TRACMAT™, STORAGE BAG, BAZOOKA® TRICKLE FILTER
SEE PAGES 24 & 25



STINGER SNAP-FOAM BERM™

Part #	Dimensions W x L x H ft. (m)	Weight lb. (kg)	Spill Cap. gal. (L)
48-10261-BK-SF	10 x 26 x 1 (3 x 7.9 x 30 cm)	142 (64.4)	1,944 (7,358)
48-12361-BK-SF	12 x 36 x 1 (3.7 x 11 x 30 cm)	198 (89.8)	3,231 (12,230)
48-14541-BK-SF	14 x 54 x 1 (4.3 x 16.5 x 30 cm)	252 (114)	5,654 (21,402)
48-12601-BK-SF	12 x 60 x 1 (3.7 x 18.3 x 30 cm)	293 (132)	5,385 (20,384)
48-14851-BK-SF	14 x 85 x 1 (4.3 x 25.9 x 30 cm)	475 (215)	8,901 (33,693)

Regulations: EPA, SPCC, NPDES

The berm capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

STINGER POLYBERM™ CONTAINMENT SYSTEMS

LINK & LATCH YOUR WAY TO CUSTOM CONTAINMENT

The PolyBerm™ System is a heavy duty, re-useable secondary containment unit with an innovative modular design and an ENPAC® Approved sump liner. All components are stacked and nested to implement quick, easy setup and efficient, cost-effective shipping and storage. No special tools or lifting equipment are required, allowing for ease of assembly and site flexibility. In addition, PolyBerm™ is not secured to the substrate, making it perfect for both long term and temporary use in parking lots, sand, rocky or muddy soil, frozen ground or on concrete areas.




NOW AVAILABLE WITH 1, 2 & 4' SIDEWALLS

NEW!

PolyBerm™'s Benefits Include:

- 4' long by 3' high straight walls
- 8' long by 3' high corner walls
- Rugged, yet low-cost secondary containment system for storage tanks
- No excavation or no anchoring to substrate required - ideal for paved areas no loose parts
- Light weight, modular design installed by as few as two people
- Ideal for construction zones as movable barricades and safety barriers
- Portable plastic units stack when not in use
- Flexible use in cold, hot, or wet environments
- Removable sump liner for easy decontamination

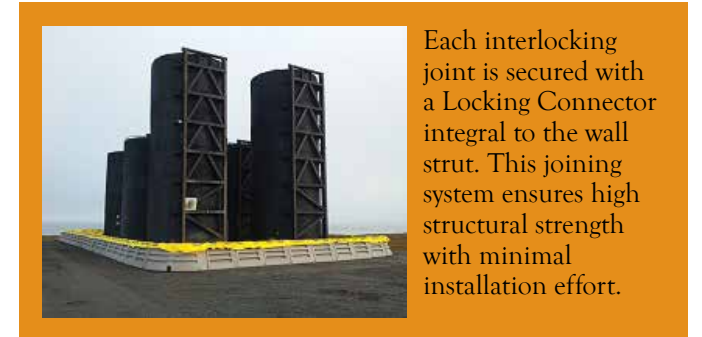

Each interlocking joint is secured with a Locking Connector integral to the wall strut. This joining system ensures high structural strength with minimal installation effort.



Stacks for convenient storage and transport.



Lightweight for easy lifting & positioning.



Rugged & reliable construction provide an easy-assembly barricade.

STINGER POLYBERM™ CONTAINMENT

Part #	Dimensions W x L x H ft. (m)	Spill Cap. gal. (L)
45-21213-PB-L	21 x 21 x 3 (6.4 x 6.4 x .9)	9,896 (37,460)
45-17533-PB-L	17 x 53 x 3 (5.2 x 16.2 x .9)	20,219 (76,537)
45-25653-PB-L	25 x 65 x 3 (7.6 x 19.8 x .9)	36,467 (138,042)
45-49493-PB-L	49 x 49 x 3 (14.9 x 14.9 x .9)	53,882 (203,965)
45-33813-PB-L	33 x 81 x 3 (10 x 24.7 x .9)	59,986 (227,071)
45-21214-PB-L	21 x 21 x 4 (6.4 x 6.4 x 1.2)	13,195 (49,948)
45-17534-PB-L	17 x 53 x 4 (7.6 x 19.8.2 x 1.2)	26,959 (102,050)
45-25654-PB-L	25 x 65 x 4 (6.4 x 6.4 x 1.2)	48,623 (184,058)
45-49494-PB-L	49 x 49 x 4 (14.9 x 14.9 x 1.2)	71,842 (271,951)
45-33814-PB-L	33 x 81 x 4 (10 x 24.7 x 1.2)	79,981 (302,761)

Regulations: EPA, SPCC, NPDES

The berm capacity is based on dimensions, low flow rate, a level surface and no displaced volume. Manufactured by Polystar