



AKRON
BRASS COMPANY

STREAMMASTER™

The StreamMaster monitor flows up to 2000 gpm (7600 lpm). The unique oval shaped 4" waterway is designed with cast-in turning vanes to reduce friction loss and allow the pump to operate at lower pressures.

MULTI PURPOSE REMOTE CONTROLLED MONITOR

The StreamMaster monitor is designed for use on ladders, platforms and pumpers.

ONE TOUCH FUNCTION OPTION


Standard control with one touch automated stow function.

ADDITIONAL FEATURES

- 348° horizontal and 135° vertical travel, both with adjustable stops
- Coated electronics to resist corrosion
- Motor protection via current limiting
- Control boxes with 3 toggle switches
 - Must specify for lower and/or upper control
- Style 5077 or Style 5078 Akromatic Nozzle - Must specify
- 12 or 24 volt - Must specify
- Simultaneous horizontal and vertical movement
- Durable lightweight Pyrolite® construction
- Manual override
- Tether Control: Either 30' or 100' - Optional
- Joystick - Optional



STYLE 3578

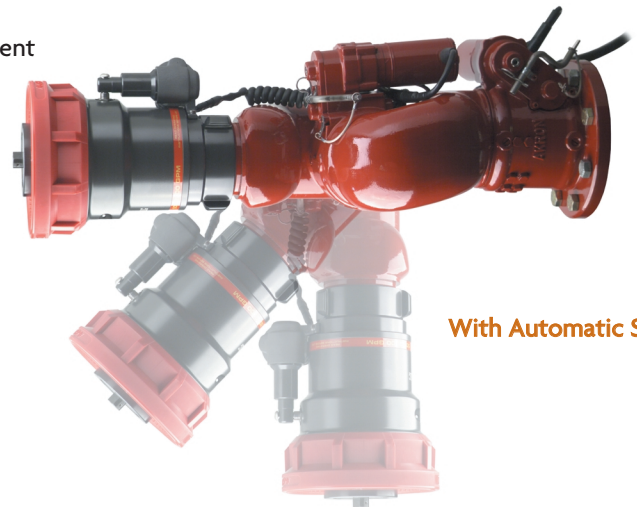

With Automatic Stow

In U.S./International
Akron Brass Company
PH: 330.264.5678
FAX: 330.264.2944

Available in
Canada through:
Akron Manufacturing
Company
PH: 519.773.8431
FAX: 519.773.3794

www.akronbrass.com

STREAMMASTER MONITORS

STYLE	WEIGHT LBS.	HEIGHT	WIDTH	INLET	OUTLET	FLOW	
						GPM	LPM
3578	* 56	16 1/4"	12 1/4"	4" FL	3 1/2" NH	2000	7600

* Weight includes Style 5078 Nozzle

IN THE U.S. CALL 1.800.228.1161 | FAX 1.800.531.7335

© Copyright 2001 by Premier Farnell Corporation. All rights reserved. No portion of this can be reproduced without the express written consent of Premier Farnell Corporation. (2/01)

A Premier Farnell Company