

## TOLCO™ Fig. 22L2 - One Hole Hanger/Restrainer for CPVC & Steel Pipe

**Size Range:** 3/4" (20mm) thru 2" (50mm) CPVC & steel pipe

**Material:** Pre-Galvanized Steel

**Function:** cULus Listed to perform as a hanger and restrainer for CPVC or IPS piping systems. The innovative design also allows for a preferred installation location close to a CPVC fitting without applying damaging compression forces on the pipe which could result in serious Mechanical ESC (Environmental Stress Cracking).

**Approvals:** Underwriters Laboratories Listed in the USA (**UL**) and Canada (**cUL**) to support fire sprinkler piping. Can be installed in wood or into minimum 20 gauge (0.9mm) steel using (1) 1/4" x 1" tek type screw. Meets and exceeds the requirements of NFPA 13, 13R and 13D.

**Installation Note:** Comes in open position for easier installation. Because of multi – structural installation possibilities, specific fastener not included; see notes below for various applications.

**For Concrete Installation** — UL requires a minimum test load of 340 lbs for CPVC hangers and 750 lbs for steel pipe hangers; verify anchors meet or exceed these requirements.



**For Wood Installation** — #14 x 1 1/2" wood screws will support the required load for **cULus**.

**For Steel Installation** — 1/4" x 1" (min. 20ga steel) Tek type screw will support required **UL** load.

**Finish:** Pre-Galvanized

**Order By:** Part number

Patent Pending

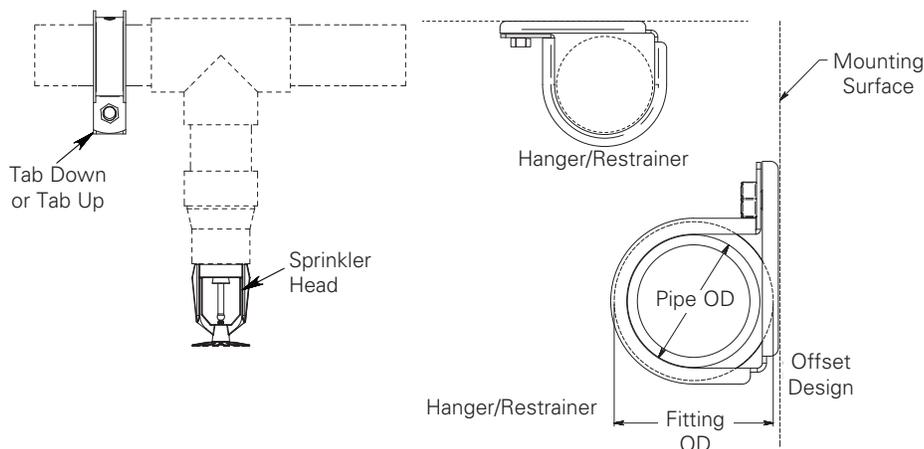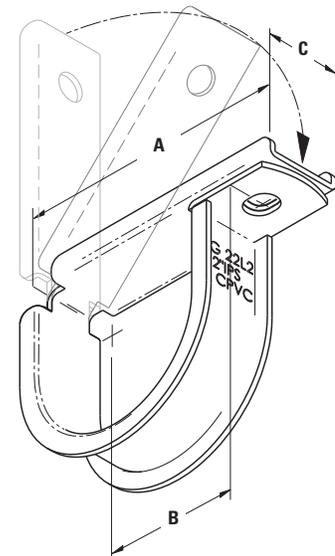

Part No.	CPVC or Steel Pipe Size in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	Max. Hanger Spacing - CPVC		Max. Hanger Spacing - Steel		Approx. Wt./100 Lbs. (kg)
					Ft.	(m)	Ft.	(m)	
22L2-3/4	3/4" (20)	2 <sup>3</sup> / <sub>16</sub> " (55.6)	1 <sup>5</sup> / <sub>16</sub> " (23.8)	3/4" (19.0)	5 1/2	(1.67)	NA	(NA)	9 (4.1)
22L2-1	1" (25)	2 1/2" (63.5)	1 1/8" (28.6)	3/4" (19.0)	6	(1.83)	12	(3.66)	9 (4.1)
22L2-1 1/4	1 1/4" (32)	2 13/16" (71.4)	1 1/4" (31.7)	3/4" (19.0)	6 1/2	(1.98)	12	(3.66)	11 (5.0)
22L2-1 1/2	1 1/2" (40)	3 1/8" (79.4)	1 7/16" (36.5)	3/4" (19.0)	7	(2.13)	15	(4.57)	12 (5.4)
22L2-2	2" (50)	3 9/16" (90.5)	1 5/8" (41.3)	3/4" (19.0)	8	(2.44)	15	(4.57)	15 (6.8)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.