

Expansion Joints Product
Elastomer Expansion Joints & Repair Couplings



Elastomer Expansion Joints

Part Number	Size	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	--------	----------	-----------	------

Elastomer Expansion Joint - PVC (continued)

PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar

EJ01-012SR	1-1/4	15	0	085	305.08
EJ01-015SR	1-1/2	10	0	085	389.48
EJ01-020SR	2	8	0	085	467.94
EJ01-025SR	2-1/2	4	0	085	681.89
EJ01-030SR	3	2	0	085	917.04

Elastomer Expansion Joint - PVC



PVC with EPDM Bellows SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007SR	3/4	10	0	085	251.31
EJ21-010SR	1	10	0	085	286.24
EJ21-012SR	1-1/4	15	0	085	311.35
EJ21-015SR	1-1/2	10	0	085	397.40
EJ21-020SR	2	8	0	085	477.49
EJ21-025SR	2-1/2	4	0	085	691.94
EJ21-030SR	3	2	0	085	935.76

Elastomer Expansion Joint - CPVC



CPVC with EPDM Bellows Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ22-007C	3/4	10	0	085	252.78
EJ22-010C	1	10	0	085	288.41
EJ22-012C	1-1/4	15	0	085	315.14
EJ22-015C	1-1/2	10	0	085	386.06
EJ22-020C	2	8	0	085	481.84
EJ22-025C	2-1/2	4	0	085	704.12
EJ22-030C	3	2	0	085	956.41

Elastomer Expansion Joint - CPVC




CPVC with EPDM Bellows SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007CSR	3/4	10	0	085	255.64
EJ21-010CSR	1	10	0	085	293.98
EJ21-012CSR	1-1/4	15	0	085	324.86
EJ21-015CSR	1-1/2	10	0	085	414.08
EJ21-020CSR	2	8	0	085	547.34
EJ21-025CSR	2-1/2	4	0	085	760.14
EJ21-030CSR	3	2	0	085	1012.39

Repair Couplings

(S119) Socket x Socket

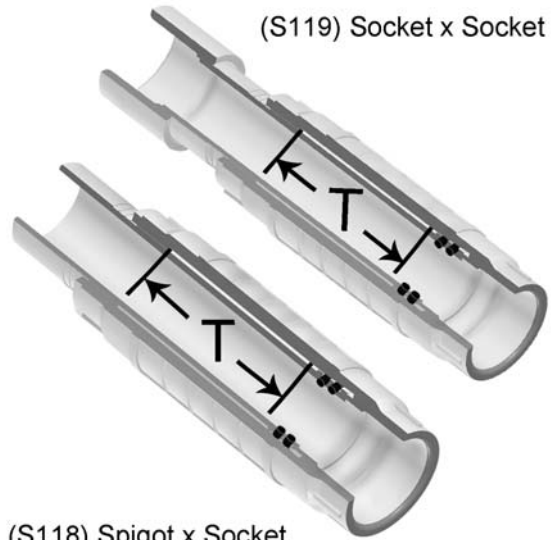

(S118) Spigot x Socket

- Multi-function Telescoping Design
- Regular and Short configurations
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM or high-grade FKM
- 1/2" - 2" Pressure Rated to 235 PSI @ 73°F (23°C)
- 2-1/2" - 4" Pressure Rated to 200 PSI @ 73°F (23°C)
- 6" Pressure Rated to 150 PSI @ 73°F (23°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Spigot x Socket

PVC White with EPDM O-ring



Can be used as short-stroke Expansion Joint

S118-05	1/2	3	25	0	025	6.82
S118-07	3/4	4	30	0	025	7.76
S118-10	1	4	15	0	025	8.94



Expansion Joints Product

Repair Couplings & Short Repair Couplings

Repair Couplings

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Spigot x Socket (continued)

PVC White with EPDM O-ring

S118-12	1-1/4	4	25	0	025	16.86
S118-15	1-1/2	4	25	0	025	18.37
S118-20	2	4-1/4	12	0	025	28.41
S118-25	2-1/2	6	5	0	025	41.22
S118-30	3	6	4	0	025	51.49
S118-40	4	6	2	0	025	90.12
S118-60	6	6	1	0	025	220.49

Unit Must Be Thrust Blocked
T = Repair Coupling Travel



Repair Coupling - Socket x Socket

PVC White with EPDM O-ring

Can be used as short-stroke Expansion Joint

S119-05	1/2	3	30	0	025	6.82
S119-07	3/4	4	24	0	025	7.76
S119-10	1	4	20	0	025	8.94
S119-12	1-1/4	4	10	0	025	16.86
S119-15	1-1/2	4	16	0	025	18.37
S119-20	2	4	10	0	025	28.41
S119-25	2-1/2	6	5	0	025	41.22
S119-30	3	6	4	0	025	51.49
S119-40	4	6	2	0	025	90.12
S119-60	6	6	1	0	025	220.49

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Short Repair Couplings

Space Saving, Compact Version of Standard Repair Coupling
 Requires 1/3 less Space



Repair Coupling - Short, Spigot x Socket

PVC White with EPDM O-ring

SH118-05	1/2	2	36	0	025	6.82
SH118-07	3/4	2-1/4	30	0	025	7.76
SH118-10	1	2	35	0	025	8.94
SH118-12	1-1/4	2-1/2	25	0	025	16.86
SH118-15	1-1/2	2-3/4	32	0	025	18.37
SH118-20	2	3	15	0	025	28.41

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code	MSRP
-------------	------	------------	--------	----------	-----------	------

Repair Coupling - Short, Socket x Socket

PVC White with EPDM O-ring

SH119-05	1/2	2	40	0	025	6.82
SH119-07	3/4	2	30	0	025	7.76
SH119-10	1	2	30	0	025	8.94
SH119-12	1-1/4	2-1/2	20	0	025	16.86
SH119-15	1-1/2	2-3/4	21	0	025	18.37
SH119-20	2	3-1/4	12	0	025	28.41

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

