

Brackets


B3064 - Adjustable Strut Bracket

Material: Steel

Function: Designed for supporting pipe from walls or structures where lateral adjustment is required.

Standard Finish: Plain or Electro-Galvanized

Order By: Part number and finish.

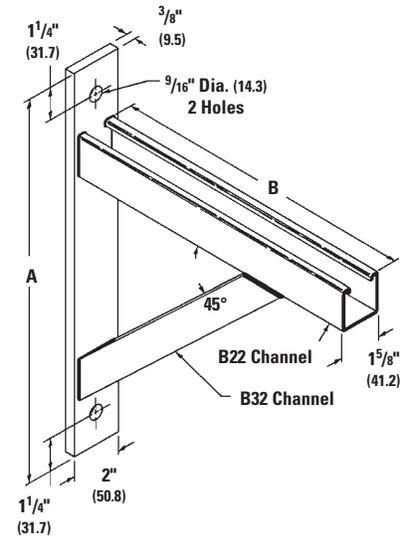

Part No.	A		B		Design Load *		Approx. Wt./100	
	in.	(mm)	in.	(mm)	Lbs.	(kN)	Lbs.	(kg)
B3064-1	15"	(381.0)	12"	(304.8)	590	(2.62)	660	(299.4)
B3064-2	21"	(533.4)	18"	(457.2)	310	(1.38)	1004	(455.4)
B3064-3	27"	(685.8)	24"	(609.6)	170	(0.75)	1346	(610.5)

* Design load based on a safety factor of 5 and reduced by 250 lbs per NFPA.

B3066 - Welded Bracket - Medium Duty

Max. Recommended Load: 800 lbs. (3.56kN)


Material: Steel

Function: Recommended for supporting pipe on top or hanging through support bracket outward from mounting surface.

Approvals: Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 33 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 32.

Finish: Plain. Contact customer service for alternative finishes and materials.

Order By: Figure number and finish

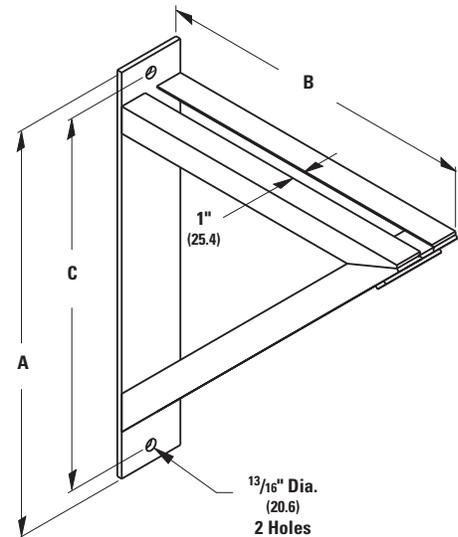

Part No.	A		B		C		Design Load *		Approx. Wt./100	
	in.	(mm)	in.	(mm)	in.	(mm)	Lbs.	(kN)	Lbs.	(kg)
B3066-0	18"	(457.2)	12"	(304.8)	15 1/2"	(393.7)	800	(3.56)	1577	(715.3)
B3066-1	24"	(609.6)	18"	(457.2)	21 1/2"	(546.1)	800	(3.56)	2578	(1169.4)
B3066-2	30"	(762.0)	24"	(609.6)	27 1/2"	(698.5)	800	(3.56)	4446	(2016.7)

* Design load based on a safety factor of 5 and reduced by 250 lbs per NFPA.

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.