

Model

# B20 Standard Top Beam Clamp

# B24 Wide Mouth Top Beam Clamp

Size Range: 3/8" and 1/2" rod.

Material: Ductile iron casting with a hardened steel cup-point set screw and lock nut.


Application: Designed for structural attachment to the top of metal beams, channel or other structural shapes to support hanger rod. The universal design allows clamps to be installed in the top or bottom

beam position.

Conforms to: Federal Specification WW-H-171 (Type 23), Manufacturers Standardization Society ANSI/MSS SP-58 (Type 19 & 23), install in accordance with ANSI/MSS SP-69.

Exceeds requirements of NFPA 13.

Finish: Black or electro zinc plated.

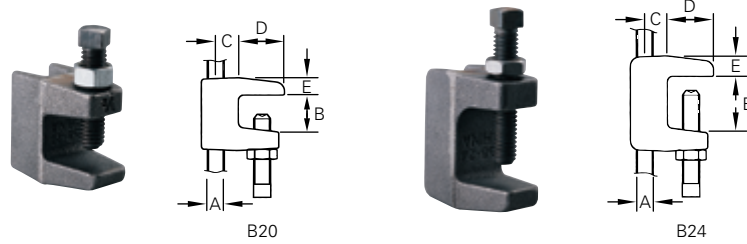

Model No.	Rod Size	Dimensions				Pipe Size	Max. Recom. Load		Weight Per 100 pcs.
		B	C	D	E		Top	Bottom	
	A								
	in	in	in	in	in	in	Lbs	Lbs	Lbs
	mm	mm	mm	mm	mm	mm	Kgs	Kgs	Kgs
B20-3	3/8	3/4	0.49	1	3/8	3/4 - 4	500	250	35.7
	M10	19.1	12.5	25.4	9.5	20 - 100	227	114	16.2
B20-4	1/2	3/4	0.49	1	3/8	5, 6, 8	950	750	35.7
	M12	19.1	12.5	25.4	9.5	125, 150, 200	432	340	16.2
B24-3	3/8	1 1/8	0.49	1	7/16	3/4 - 4	500	250	43.2
	M10	28.6	12.5	25.4	11.1	20 - 100	227	114	19.6
B24-4	1/2	1 1/8	0.49	1	7/16	5, 6, 8	950	750	43.2
	M12	28.6	12.5	25.4	11.1	125, 150, 200	432	340	19.6