

Pipe Hangers

TOLCO™ Fig. 120 - "U" Hanger

Size Range: Size 3/4" (20mm) thru 8" (200mm) pipe

Material: Steel


Function: Used to support piping from wood beams where no contraction is expected. Used extensively in automatic fire sprinkler systems.

Approvals: Complies with requirements of National Fire Protection Association (NFPA), Pamphlet 13.

Maximum Temperature: 750°F (399°C)

Finish: Plain. Contact customer service for alternative finishes and materials.

Order By: Figure number, pipe size, length and finish

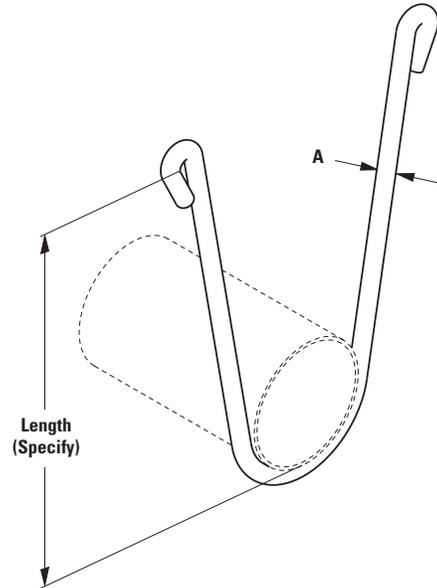

Part No.	Pipe Size		A		Fastener Size
	in.	(mm)	in.	(mm)	
120-3/4	3/4"	(20)	5/16"	(7.9)	16 x 2*
120-1	1"	(25)	5/16"	(7.9)	16 x 2*
120-1 1/4	1 1/4"	(32)	5/16"	(7.9)	16 x 2*
120-1 1/2	1 1/2"	(40)	5/16"	(7.9)	16 x 2*
120-2	2"	(50)	5/16"	(7.9)	16 x 2*
120-2 1/2	2 1/2"	(65)	3/8"	(9.5)	3/8 x 2 1/2**
120-3	3"	(80)	3/8"	(9.5)	3/8 x 2 1/2**
120-3 1/2	3 1/2"	(90)	3/8"	(9.5)	3/8 x 2 1/2**
120-4	4"	(100)	3/8"	(9.5)	1/2 x 3**
120-5	5"	(125)	1/2"	(12.7)	1/2 x 3**
120-6	6"	(150)	1/2"	(12.7)	1/2 x 3**
120-8	8"	(200)	1/2"	(12.7)	5/8 x 3**

* Drive Screw

** Lag Bolt

Note: 30° leg style for some sizes. Consult factory for availability.