

Schedule 80 PVC Product

Schedule 80 Repair Fittings & Compression Couplings & GripLoc™ Coupling



Schedule 80 Repair Fittings

Pipe Extenders

| Part Number | Size | Std Pk | Mstr Ctn | Prod Code | MSRP |
|-------------|------|--------|----------|-----------|------|
|-------------|------|--------|----------|-----------|------|


Pipe O.D. Spigot x Pipe I.D. Spigot

Fabricated, Non-Pressure Rated



| | | | | | |
|------------|-----------------|---|----|-----|---------|
| S0801-20F | 2 - 2" EXT | 1 | 10 | 394 | 90.46 |
| S0801-25F | 2-1/2 - 2" EXT | 1 | 8 | 394 | 104.67 |
| S0801-30F | 3 - 2-1/2" EXT | 1 | 8 | 394 | 118.47 |
| S0801-40F | 4 - 2-5/8" EXT | 1 | 12 | 394 | 128.43 |
| S0801-60F | 6 - 3-1/2" EXT | 1 | 10 | 394 | 171.52 |
| S0801-80F | 8 - 5" EXT | 1 | 2 | 394 | 185.17 |
| S0801-100F | 10 - 5-1/2" EXT | 1 | 0 | 394 | 240.98 |
| S0801-120F | 12 - 6-1/2" EXT | 1 | 0 | 394 | 338.45 |
| S0801-140F | 14 - 7-1/4" EXT | 1 | 0 | 394 | 960.35 |
| S0801-160F | 16 - 9" EXT | 1 | 0 | 394 | 1123.93 |
| S0801-180F | 18 - 10" EXT | 1 | 0 | 394 | 1475.19 |

Solvent Cement I.D. Spigot into Pipe O.D.

"EXT" indicates MINIMUM length of pipe extension added

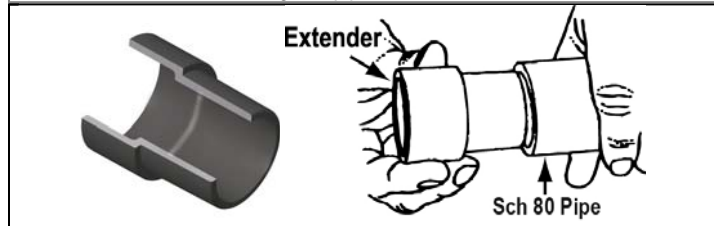

Compression Couplings

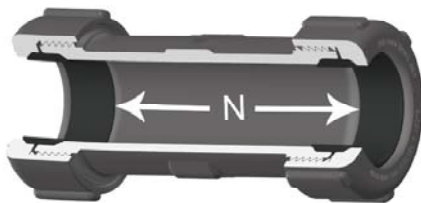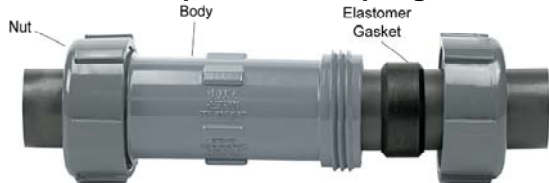

- Designed for Quick Connections, System Modifications or Repairs
- Completely Redesigned for Improved Versatility
- Easy-Thread Compression Nut
- New Spigot Conversion Capability
- Full Service 200 PSI Pressure Rating
- NSF® Certified for Potable Water Use

Compression Coupling, PVC Gray

| Part Number | Size | Gasket to Gasket - N | Std Pk | Mstr Ctn | Prod Code | MSRP |
|-------------|------|----------------------|--------|----------|-----------|------|
|-------------|------|----------------------|--------|----------|-----------|------|

Elastomer Gasket

| | | | | | | |
|----------|-----|-------|----|---|-----|------|
| S110-05G | 1/2 | 3-3/8 | 28 | 0 | 024 | 5.06 |
|----------|-----|-------|----|---|-----|------|

Compression Coupling, PVC Gray (continued)

| Part Number | Size | Gasket to Gasket - N | Std Pk | Mstr Ctn | Prod Code | MSRP |
|-------------|------|----------------------|--------|----------|-----------|------|
|-------------|------|----------------------|--------|----------|-----------|------|

Elastomer Gasket

| | | | | | | |
|----------|-------|--------|----|---|-----|--------|
| S110-07G | 3/4 | 3-9/16 | 24 | 0 | 024 | 7.57 |
| S110-10G | 1 | 3-3/4 | 20 | 0 | 024 | 9.77 |
| S110-12G | 1-1/4 | 4-1/8 | 10 | 0 | 024 | 15.07 |
| S110-15G | 1-1/2 | 4-5/8 | 16 | 0 | 024 | 15.56 |
| S110-20G | 2 | 5-1/16 | 12 | 0 | 024 | 20.19 |
| S110-25G | 2-1/2 | 5-7/8 | 6 | 0 | 024 | 38.02 |
| S110-30G | 3 | 6-3/16 | 4 | 0 | 024 | 49.69 |
| S110-40G | 4 | 7-3/8 | 4 | 0 | 024 | 81.77 |
| S110-60G | 6 | 7-9/16 | 1 | 0 | 024 | 185.95 |

N = Gasket to Gasket

| Part Number | Size | Std Pk | Mstr Ctn | Prod Code | MSRP |
|-------------|------|--------|----------|-----------|------|
|-------------|------|--------|----------|-----------|------|

Compression Coupling Nut Wrenches

Fits all Spears® Compression Fittings



| | | | | | |
|----------------------|-------|---|----|-----|-------|
| CCW-005 | 1/2 | 1 | 50 | 299 | 14.65 |
| CCW-007 | 3/4 | 1 | 50 | 299 | 14.91 |
| CCW-010 | 1 | 1 | 50 | 299 | 15.54 |
| CCW-012 | 1-1/4 | 1 | 50 | 299 | 17.57 |
| CCW-015 | 1-1/2 | 1 | 50 | 299 | 18.96 |
| CCW-020 ¹ | 2 | 1 | 50 | 299 | 21.19 |
| CCW-030 ² | 3 | 1 | 25 | 299 | 26.06 |
| CCW-060 | 6 | 8 | 0 | 299 | 39.19 |

¹ CCW-20 - Wrench also fits 2-1/2" Coupling Body

² CCW-30 - Wrench also fits 4" Coupling Body

Compression Coupling Nut Wrench Set

| Part Number | Size | Std Pk | Mstr Ctn | Prod Code | MSRP |
|-------------|------|--------|----------|-----------|------|
|-------------|------|--------|----------|-----------|------|

Fits all Spears® Compression Fittings

| | | | | | |
|---------|-----|---|----|-----|--------|
| CCW-000 | Set | 1 | 25 | 299 | 122.38 |
|---------|-----|---|----|-----|--------|

Complete Set of Wrenches, Sizes 1/2 - 3

GripLoc™ Coupling

GripLoc™ Coupling

WARNING: DO NOT INSERT FINGERS
For Cold Water Only - EPDM Gasket
Pressure Rated to 235 psi @ 73°F



Uses No Solvent Cement

| | | | | | |
|------------|-------|---|----|-----|-------|
| GL429-005G | 1/2 | 1 | 40 | 137 | 17.01 |
| GL429-007G | 3/4 | 1 | 36 | 137 | 21.87 |
| GL429-010G | 1 | 1 | 20 | 137 | 22.47 |
| GL429-012G | 1-1/4 | 1 | 15 | 137 | 25.99 |
| GL429-015G | 1-1/2 | 1 | 15 | 137 | 25.99 |
| GL429-020G | 2 | 1 | 10 | 137 | 27.21 |

GripLoc™ IPS Size Release Tool

For Removal of GripLoc™ Fittings



| | | | | | |
|-------------|-----|---|----|-----|------|
| GLIPSRT-005 | 1/2 | 1 | 50 | 299 | 5.83 |
|-------------|-----|---|----|-----|------|