

Printer Kiosk

Direct Thermal Printer Kiosk

Standard Features

Direct Thermal Printer Kiosk

- Custom America VKP80ii
- Slide door access to ticket
- 8 in paper roll

Specifications

Line Voltages:

115 or 230 VAC

Frequency:

50 or 60 Hz

Power Consumption:

0.5 amps (depending on options)

Fusing:

3.15 amps circuit breaker

Humidity:

0-95% relative humidity

Rating/Material:

NEMA Type 1
IP10

Printer Communication Ports:

RS-232 or Ethernet

Storage Temperature:

14 to 158° F (-10 to 70° C)

Current Supported Riser Plates:

Zebra® 140XIIIPlus
Zebra 105SL
Zebra R110Xi
Zebra Z4Mplus
Zebra 2746e
Datamax-O'Neil® I-4208
Datamax-O'Neil 4206
Datamax-O'Neil I-4308
Datamax-O'Neil I-4210
Datamax-O'Neil I-4212
Intermec® 3400e
Intermec 4440


Warranty:

Two-year limited warranty



PN 112836

PN 120029

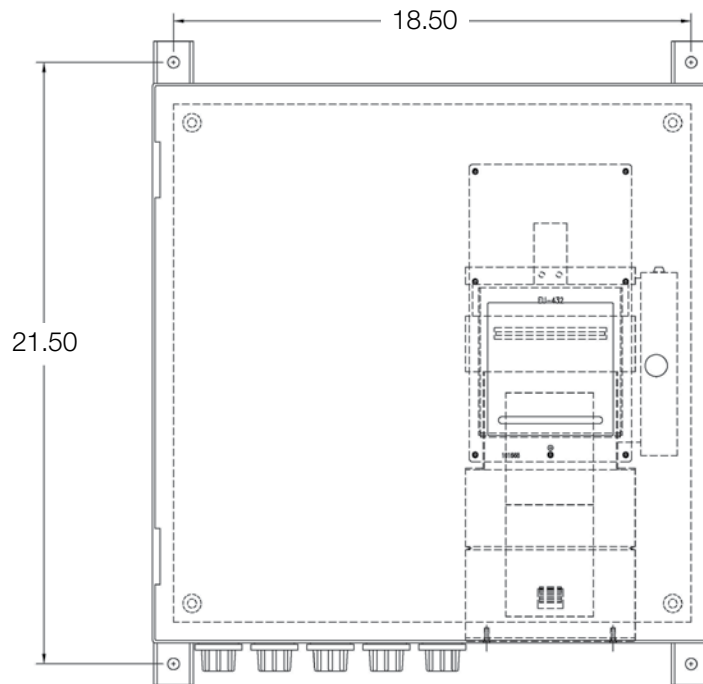

Printer Kiosk with Intercom

