EL204

Signal Trim Junction Box



Standard Features

- · ABS enclosure with molded-in cable fittings
- · Premium screw terminals
- · Six-screw attachment to lid, die cut gasket for superior environment protection
- Number of cells: Two, three or four single cells

Applications


• Floor, hopper, tank or livestock applications


Part Number/Price

Part#	Description	Price
73428	EL204 junction box	\$185.00
88958	Board only	\$150.00

Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of system instability.

(0 Φ **(** 4.5" 3.75" (114.3 mm) (95.3 mm) Φ (4) 6" (152.4 mm) _ 6.59" _ (167.5 mm) _ 5.5" _ (139.7 mm)

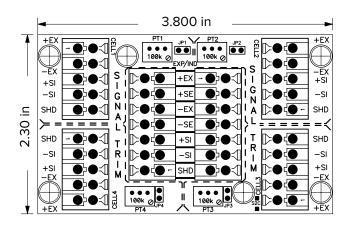



Specifications

Cable Fittings:

Five water tight nylon compression fittings, 0.210 in x 0.280 in (5.3 mm x 7.1 mm)

Connectors: Spring clamp screwless, 12-28 AWG

Trimming: Individual cell trim, signal trim

Potentiometers: 100,000 ohm, 25 turn cermet

Enclosure:

ABS with molded through-fittings, sealed six-screw lid

Circuit Board:

3.8 in x 2.3 in (96.5 mm x 58.4 mm); with conformal coating

Operating Temperature:

0°F to 122°F (-18°C to 50°C)

Warranty:

One-year limited warranty