
Hostile Environment Load Cell Cable

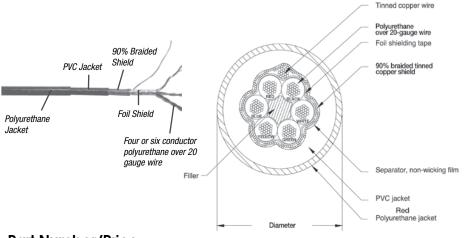


Standard Features

- · Designed for use in hostile environments
- Polyurethane jacketing provides superior chemical and abrasion resistance
- RFI and EMI protected with foil overbraid shield
- Unmatched durability, yet extremely flexible
- All conductors are industry-standard color coded
- Diameter—EL147HE: 0.32 in (8.1 mm)
- The four-wire cable is best suited for longer runs where remote sense lines can be used
- Temperature rating: -22°F to 176°F (-30°C to 80°C)
- 500 V rating

Part Number/Price

Part#	Continuo	ous Roll	Description	Price
15510	100ft	30.5 m	Four-conductor hostile environment cable	\$155.00
15511	250ft	76.2 m	Four-conductor hostile environment cable	\$385.00
15512	500 ft	152.4 m	Four-conductor hostile environment cable	\$745.00
15513	1,000ft	304.8 m	Four-conductor hostile environment cable	\$1,495.00
15494	Custom Length		Four-conductor hostile environment cable	\$1.65/ft
15520	100ft	30.5 m	Six-conductor hostile environment cable	\$235.00
15521	250ft	76.2 m	Six-conductor hostile environment cable	\$575.00
15522	500ft	152.4 m	Six-conductor hostile environment cable	\$1,075.00
15523	1,000ft	304.8 m	Six-conductor hostile environment cable	\$1,910.00
15496	Custom Length		Six-conductor hostile environment cable	\$2.50/ft

Standard Load Cell Cable

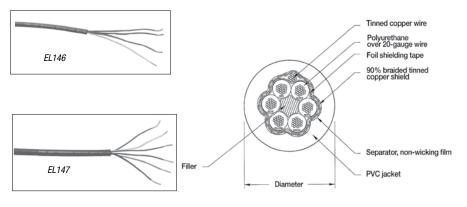

Part Number/Price

Part#	Continuous Roll		Description	Price
15505	100ft	30.5 m	Four-conductor cable	\$125.00
15506	250 ft	76.2 m	Four-conductor cable	\$295.00
15507	500 ft	152.4 m	Four-conductor cable	\$595.00
15508	1000 ft	304.8 m	Four-conductor cable	\$995.00
15493	Custom Length		Four-conductor cable	\$1.35/ft
15515	100 ft	30.5 m	Six-conductor cable	\$195.00
15516	250 ft	76.2 m	Six-conductor cable	\$450.00
15517	500 ft	152.4 m	Six-conductor cable	\$865.00
15518	1000 ft	304.8 m	Six-conductor cable	\$1,695.00
15495	Custom Length		Six-conductor cable	\$2.05/ft

Standard Features

- EL146—4-wire load cell cable
- EL147—6-wire load cell cable
- 20 AWG tinned copper wire stranded for flexibility
- Braided shielding is encased in red PVC
- All conductors are industry-standard color coded
- Diameter—EL146: 0.25in (6.4mm); EL147: 0.29in (7.4mm)
- The six-wire cable is best suited for longer runs where remote sense lines can be used
- Temperature rating: -22°F to 126°F (-30°C to 80°C)

APPROVALS







484