

## Specifications

**Clamp Voltage:**  
140 V rms

**Peak Surge Current:**  
6,500 Amps

**Clamping Time:**  
<Five nanoseconds

**Input Voltage:**  
120 VAC



**Maximum Current:**  
15 Amps

**Maximum Power:**  
1,875 Watts

**Noise Suppression:**  
Frequency Attenuation  
50 KHz>20 db  
150 KHz>40 db  
1 MHz>80 db  
>6 MHz>30 db

**Dimensions:**  
2.37 W x 4.15 H x 2.31 in D  
(60.2 W x 105.4 H x 58.7 mm D)

**Weight:**  
Approximately 1 lb (0.45 kg)

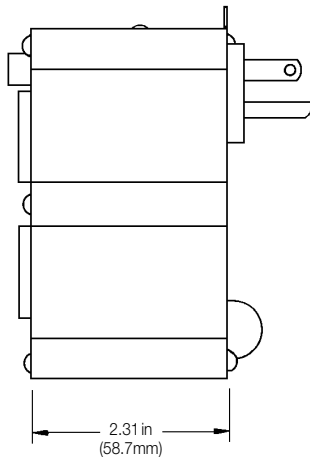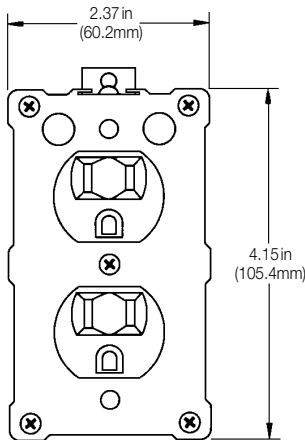

## Standard Features

- Two outlets, direct plug-in
- LED indicator for power on
- LED indicator for protection circuitry
- UL1449 listed at 330 volts
- Mounting clamp assures positive connection

## Part Number/Price

Part #	Description	Weight	Price
21145	ISOBLOK® AC two-outlet transient protector	1 lb	\$65.00