Load Ranger Wireless Wheel Pad Scale



Standard Features

- Up to 6 individual pads (3 sets) per system, completely wireless
- 14 individual pads (7 sets) per system maximum, joined via cable, wireless communication to indicator
- · Industrial Bluetooth® radio module to communicate with indicator
- · Integrated wheels and nonslip rubber under platform
- Internal rechargeable battery with 40 hours of battery life
- · Built-in indicator on each scale with 1 in character display
- IP67 rating
- · Cover plate protects built-in indicator

Optional remote indicator with integrated printer in carrying case:

- Carrying case: 1 ft x 1 ft 6 in x 7 in (325 mm x 460 mm x 170 mm)
- · Backlit graphic display with touchscreen technology
- · Internal battery with 10 hours of battery life
- Real-time clock
- Permanent data storage
- · Slot for built-in micro SD
- · 24-bit A/D converter, up to 2,300 conversions per second
- One RS-232 serial port
- Thermal printer
- · ABS transport case

Wheel weighing software:

- · Multi-scale function mode weighs with up to 14 individual pads (seven sets)
- · Static axle weighing function, up to two channels
- Calculation of center of gravity
- · Semi-automatic and preset tare
- · Selection of displayed data on LCD touchscreen
- · Customizable keyboard
- 15 customizable and printable text IDs
- 1,000 field database
- · Programmable printout from keyboard
- · Print and display list of last 3,500 vehicles

Options/Accessories

- · Leveling modules
- · Pit frames for semi-permanent floor installations
- Aluminum ramps

Specifications

- Construction:
- Aluminum allov

Display:

1 in character display on each scale

Platform Dimensions (I x w x h):

Load Ranger RF-MD: 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) Load Ranger RF-WD: 2 ft 6 in x 1 ft 10 in x 2.28 in (750 mm x 561 mm x 58 mm) Load Ranger RF-XWD: 3 ft 1 in x 2 ft x 2.28 in (950 mm x 611 mm x 59 mm)

System Accuracy:

0.05% of rated capacity

Power Supply:

Rechargeable battery Approximately 40 hours of battery life Includes uL approved AC wall adaptor

Loading Surface (I x w): Load Ranger RF-MD: 1 ft 10 in x 1 ft 4 in (564 mm x 400 mm) Load Ranger RF-WD: 2 ft 6 in x 1 ft 6 in (750 mm x 450 mm) Load Ranger RF-XWD: 3 ft 1 in x 1 ft 8 in (950 mm x 500 mm)

Operating Temperature:

14°F to 104°F (-10°C to 40°C)

Storage Temperature:

-4°F to 140°F (-20°C to 60°C) Warranty:

Two-year limited warranty

An ISO 9001 Registered Company @ 2020 Rice Lake Weighing Systems 01/20 Prices and specifications subject to change without notice. Visit ricelake.com for current prices.


VEHICLE SCALES

Part Number/Price

| Part # | Description | | Price |
|-----------------|--|----------------|------------|
| 182099 | Remote indicator with integrated printer in carrying case | | \$1,595.00 |
| Part # | Size | Graduation | Price |
| | | Glaudation | FIICE |
| Load Ranger RF- | MD | | |
| 181843 | 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) | 3,000 x 1 lb | \$1,695.00 |
| 181844 | 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) | 6,500 x 2 lb | \$1,695.00 |
| 181845 | 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) | 13,000 x 5 lb | \$1,695.00 |
| 181846 | 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) | 22,000 x 10 lb | \$1,825.00 |
| 181847 | 1 ft 10 in x 1 ft 8 in x 2.28 in (564 mm x 511 mm x 58 mm) | 33,000 x 10 lb | \$1,825.00 |
| Load Ranger RF- | WD | | |
| 181848 | 2 ft 6 in x 1 ft 10 in x 2.28 in (750 mm x 561 mm x 58 mm) | 13,000 x 5 lb | \$2,100.00 |
| 181849 | 2 ft 6 in x 1 ft 10 in x 2.28 in (750 mm x 561 mm x 58 mm) | 22,000 x 10 lb | \$2,100.00 |
| 181850 | 2 ft 6 in x 1 ft 10 in x 2.28 in (750 mm x 561 mm x 58 mm) | 33,000 x 10 lb | \$2,100.00 |
| Load Ranger RF- | XWD | | |
| 181851 | 3 ft 1 in x 2 ft x 2.28 in (950 mm x 611 mm x 59 mm) | 13,000 x 5 lb | \$2,575.00 |
| 181852 | 3 ft 1 in x 2 ft x 2.28 in (950 mm x 611 mm x 59 mm) | 22,000 x 10 lb | \$2,575.00 |
| 181853 | 3 ft 1 in x 2 ft x 2.28 in (950 mm x 611 mm x 59 mm) | 33,000 x 10 lb | \$2,575.00 |
| 181854 | 3 ft 1 in x 2 ft x 2.28 in (950 mm x 611 mm x 59 mm) | 44,000 x 20 lb | \$2,575.00 |

Options/Accessories

| Part # | Description | Price |
|--------|--|----------|
| 190916 | RS-485 cable used to connect wheel pad directly to indicator | \$175.00 |
| 188744 | RS-485 cable, 10 m to connect more than a 6 pad system | \$175.00 |
| 181881 | Aluminum Ramp for Load Ranger MD Models (single ramp only) | \$245.00 |
| 181882 | Aluminum Ramp for Load Ranger WD Models (single ramp only) | \$275.00 |
| 181883 | Aluminum Ramp for Load Ranger XWD Models (single ramp only) | \$300.00 |
| 182053 | Printer paper roll, 57 mm x 30m, 12 mm core 51 mm 0D | \$2.00 |

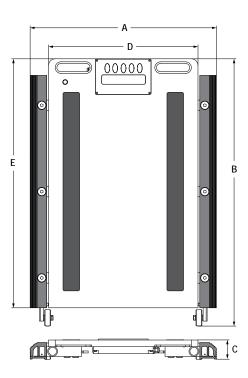

| Dimensions | | | | | | |
|------------|------------|-----------|-----------|--|--|--|
| | RF-MD | RF-WD | RF-XWD | | | |
| Α | 1 ft 8 in | 1 ft 10in | 2ft | | | |
| В | 2ft | 2ft 8in | 3ft 3in | | | |
| С | 2.28 in | 2.28 in | 2.28 in | | | |
| D | 1 ft 4 in | 1 ft 6in | 1 ft 8 in | | | |
| E | 1 ft 10 in | 2 ft 6 in | 3 ft 1 in | | | |

An ISO 9001 Registered Company © 2020 Rice Lake Weighing Systems 01/20 Prices and specifications subject to change without notice. Visit ricelake.com for current prices.