

Scales for medical and health facilities



RICE LAKE
WEIGHING SYSTEMS

800-472-6703 **www.ricelake.com/health**



RICE LAKE WEIGHING SYSTEMS HISTORY OF QUALITY AND SUPPORT

From accurate medical dosing, research and laboratory work to patient intake, home healthcare and fitness centers, Rice Lake provides health and fitness equipment to serve the industry's need for reliable and accurate measurement.

Since 1946, Rice Lake Weighing Systems has been manufacturing and distributing weight-related products and supplies. A global leader in measurement and weight-based solutions, Rice Lake's roots have been planted firmly in the principles of quality and customer service through three generations of family ownership.

CUSTOMER SERVICE

Rice Lake is relied upon throughout the world for delivering the highest standard of product along with the best service in the weighing industry. Knowledgeable customer service representatives are available by phone, email and live chat on www.ricelake.com, Monday through Friday from 6:30 a.m. to 6:30 p.m. Central Time. Emergency scale support is available 24/7/365.

CONTACT INFORMATION

Toll Free USA: 800-472-6703

Telephone:

715-234-9171

Toll Free Canada/Mexico: 800-321-6703

24-hour Fax:

715-234-6967

Email:

orderdesk@ricelake.com

Internet:

www.ricelake.com



Kurt Labanowski Outside Sales Support 715-434-5430



Becky ClausenInside Sales Support



Stacie Lashmett-Stoeberl Inside Sales Support



Jason Mathews Inside Sales Support



Ali Richter Inside Sales Support



TennantInside Sales Support



Mark Hopland Inside Service Support



Torey NelsonInside Service
Support



Brehven Oehlke Inside Service Support



Preston Reed Inside Service Support



Reetz
Inside Service
Support

CALIFORNIA PROPOSITION 65 RICE LAKE WEIGHING SYSTEMS STATEMENT

Proposition 65 requires businesses to inform Californians about exposures to chemicals that are known to cause cancer, birth defects or other reproductive harm. These chemicals may be in the products you purchase, or they may be exposed to you at home, at the workplace or within the environment. Proposition 65 enables Californians to make informed decisions about their exposures to these chemicals.

Rice Lake Weighing Systems wants to be proactive in regards to Proposition 65 and provide information about the products we produce, distribute and use to manufacture equipment we sell.

We are providing this warning based on the knowledge that one or more chemicals included in the California Proposition 65 list known to cause cancer, birth defects or other reproductive harm may be present in Rice Lake Weighing Systems products and workplaces.



WARNING: Chemicals listed in California Proposition 65 known to cause cancer, birth defects or other reproductive harm may be present only in trace amounts or contained within Rice Lake Weighing Systems products and proper encapsulation equipment. This warning is provided out of an abundance of caution to enable you to be an informed consumer.

TABLE OF CONTENTS

- 150-10-5 **Digital Physician Scale** Eve-Level
- 150-10-6 Digital Physician Scale Waist-Level
- 150-10-7 **Digital Physician Scale** Floor-Level
- 160-10-7N **Digital Athletic Scale** Low-Profile
- RL-MPS **Mechanical Physician Scale** LB and KG
- RL-MPS-10 **Mechanical Physician Scale LB Only**
- RL-MPS-20 **Mechanical Physician Scale** LB and KG
- RL-MPS-30 **Mechanical Physician Scale KG Only**
- **20** RL-MPS-40 Mechanical Physician Scale LB and KG
- RL-MPS-50 Mechanical Physician Scale LB and KG
- **26** 250-10-2 **Bariatric Handrail Scale**
- 250-10-4 **Bariatric Scale with Handrail and Chair Seat**
- **30** 260-10-1 **Bariatric Handrail Scale**
- 350-10-3M **Digital Wheelchair Scale with** Handrail
- **36** 350-10-2 Single-ramp Wheelchair Scale with Handrail
- **38** 350-10-3 **Dual-ramp Wheelchair Scale** with Handrail
- 350-10-4 **Dual-ramp Wheelchair Scale** with Seat and Handrail
- 350-10-7 Single-ramp Wheelchair **Platform Scale**
- 350-10-8 **Dual-ramp Wheelchair** Platform Scale
- RL-350-5 Single-ramp Portable **Bariatric Wheelchair Scale** 34 Inches Wide
- **48** RL-350-6 **Dual-ramp Portable Bariatric Wheelchair Scale** 34 Inches Wide

- **50** SB-1150 Summit™ Bariatric Wheelchair Scale
- SD-1150-WP Dialysis Wheelchair Scale
- **54** D300 Wireless Wheelchair Scale
- **58** 550-10-1 **Digital Chair Scale** 17 Inch Wide Seat
- 560-10-1 Digital Chair Scale 20 Inch Wide Seat
- 62 RL-MCS Mechanical Chair Scale 16 Inch Wide Seat
- 66 RL-DBS Digital Baby Scale
- 68 RL-DBS-2 Digital Baby Scale **Dual Range**
- 650-10-1 **Neonatal Scale Dual Range**
- 72 RL-MIS Mechanical Baby Scale LB and KG Beam
- RL-MIS-20 Mechanical Baby Scale KG Beam
- **76** D400 Adult and Child Scale
- 78 DIGITAL BABY SCALE **Suspended Infant Scale**
- **80** RL-PCT-10 **Pediatric Circumference Tape**
- RL-PMM Pediatric Measuring Mat
- **GROWTH CHART Boy and Girl**
- **82** RL-WMS-10 **Wall Mount Stadiometer**
- RL-440HH Digital Home Health Scale
- 88 RL-330HHD/
- 88 RL-330HHL Dial Home Health Scale
- DHH-10 DIGITAL **Home Health Scale**
- TE SERIES Tuning Fork Enhanced Balance
- 94 CALIBRATION WEIGHTS
- ADDITIONAL RICE LAKE PRODUCTS FOR YOUR **FACILITY**





BLUETOOTH®



ADAPTOR



BATTERY



UPS/FEDEX





HEIGHT METER



1 YEAR WARRANTY



2 YEAR WARRANTY

To review our terms and conditions, please visit

www.ricelake.com/support.

*Shipping weights and dimensions for products recommended to ship via LTL do not include pallet weight or pallet dimensions unless noted.

A standard LTL delivery is considered to be one that ships from either a company or partner dock to arrival at a standard commercial address with disposition of the goods at the rear of the truck to enable off loading by material handling equipment provided by the consignee at either ground level or via loading dock. Allied to this, the freight in question should be palletized and secured in a way to facilitate the safe handling of the freight with no one dimension over seven feet, six inches.

Any LTL delivery falling outside of this criteria may well accrue accessorial charges levied by the carrier in line with their tariff rules. It is recommended that any potential accessorial costs are discussed at the time of order placement so that these costs can be billed appropriately at the time of shipment. If this is not the case, Rice Lake Weighing Systems reserves the right to charge the customer retrospectively for any accessorial costs incurred during the delivery process.

TRADEMARKS

The following product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

Bluetooth® Rice Lake Weighing Systems® Motiontrap™ $Summit^{\text{m}}$



PHYSICIAN SCALES DIGITAL AND MECHANICAL



150-10-5

DIGITAL PHYSICIAN SCALE

The Rice Lake 150-10-5 digital physician scale is designed for both modern appearance and contemporary function with forward-thinking features. Offering an eye-level digital display, the 150-10-5 physician scale clearly displays weight. Seamlessly capture height and weight with the integrated height rod, which tucks neatly within the scale column. The large, stable scale base is both comfortable and easily transported with two built-in rubber wheels. Whether powered from an optional AC adaptor or standard alkaline batteries, the 150-10-5 is easy to use. Its large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

- Rubber wheels for easy transport

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- Integrated height rod measures from 27.5 in to 82 in (70 cm to 208 cm)

(W x L x H) 14.5 in x 14.5 in x 3 in

batteries (included) or AC adaptor

Battery Type:

Six AA alkaline (included)

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:



P	ART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
•		150-10-5	30	18	9	26	35	35
1	61818	150-10-5BT	30	18	9	26	35	35
		150-10-5BLE		18	9	26	35	35

DIMENSIONS


	INCHES	CENTIMETERS
A	54	137.2
В	22.4	57
C	14.7	37.5
D	3.0	7.6

DIGITAL PHYSICIAN SCALE - EYE-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART#
150-10-5	$550 \text{ lb} \times 0.2 \text{ lb} (250 \text{ kg} \times 0.1 \text{ kg})$	USB	119113
150-10-5BT	550lb × 0.2lb (250kg × 0.1kg)	USB and Bluetooth 2.0	161818
150-10-5BLE	550 lb × 0.2 lb (250 kg × 0.1 kg)	Bluetooth BLE 4.0	194726

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830





150-10-6 DIGITAL PHYSICIAN SCALE WAIST-LEVEL

The Rice Lake 150-10-6 digital physician scale is designed with a modern appearance and features a waist-level digital display at just over four feet for ease of use. The large, stable scale base is both comfortable and easily transported with two built-in rubber wheels. The 150-10-6 can be powered from an optional AC adaptor or standard alkaline batteries. Its large push-button display lights up for simple viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Rubber wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable

SPECIFICATIONS

Capacity:

550 lb x 0.2 lb (250 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 14.5 in x 14.5 in x 3 in

Power

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Operating Temperature

50° F to 104° F (14° C to 40° C)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:









F	PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
	161786	150-10-6	30	19	9	25	37	37
	161819	150-10-6BT	30	19	9	25	37	37
			30	19	9	25	37	37

DIMENSIONS

	INCHES	CENTIMETERS
A	48.4	123
В	22.4	57
C	14.7	37.5
D	3.0	7.6

DIGITAL PHYSICIAN SCALE - WAIST-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART#
150-10-6	$550 \text{lb} \times 0.2 \text{lb} (250 \text{kg} \times 0.1 \text{kg})$	USB	161786
150-10-6B	T $550 \text{ lb} \times 0.2 \text{ lb} (250 \text{ kg} \times 0.1 \text{ kg})$	USB and Bluetooth 2.0	161819
150-10-6BI	LE 550 lb × 0.2 lb (250 kg × 0.1 kg)	Bluetooth BLE 4.0	194732

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



150-10-7

DIGITAL PHYSICIAN SCALE FLOOR-LEVEL

The Rice Lake 150-10-7 digital physician scale provides precision weight measurements up to 550 pounds. The large, stable scale base is both comfortable and easily transported with an optional carrying case. Whether powered from an optional AC adaptor or standard alkaline batteries, the 150-10-7 is easy to use. Its large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- 6 ft cable between digital display and base



Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:











PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
121304	150-10-7	25	18	6	17	20	20
161820	150-10-7BT	25	18	6	17	20	20
194728	150-10-7BLE	25	18	6	17	20	20

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	14.7	37.5	D	7.8	20
В	14.7	37.5	E	6.7	17
C	3.0	7.8		• • • • • • • • • • • • • • • • • • • •	

DIGITAL PHYSICIAN SCALE - FLOOR-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART#
150-10-7	$550 \text{lb} \times 0.2 \text{lb} (250 \text{kg} \times 0.1 \text{kg})$	USB	121304
150-10-7BT	550 lb × 0.2 lb (250 kg × 0.1 kg)	USB and Bluetooth 2.0	161820
150-10-7BLE	550 lb × 0.2 lb (250 kg × 0.1 kg)	Bluetooth BLE 4.0	194728

OPTIONS

DESCRIPTION	PART#
Carrying case	107445
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



Carrying case

An ISO 9001 Registered Company ©2020 Rice Lake Weighing Systems 01/20 Specifications subject to change without notice. Visit ricelake.com

160-10-7N

DIGITAL ATHLETIC SCALE LOW-PROFILE

Rice Lake's 160-10-7N low-profile digital athletic scale offers superior accuracy and built-in durability for repetitive use in settings where a Legal for Trade scale is needed. It is slip-resistant, demands little space and is exceptionally portable. The 160-10-7N low-profile scale features a very low, 1.65-inch rise.

FEATURES

- Large, stable scale base
- Push-button LCD display
- Unit of Measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable
- 6 ft cable between digital display and base

Capacity: 550 lb x 0.2 lb (250 kg x 0.1 kg) Platform Dimensions: (W x L x H) 14.4 in x 14.4 in x 1.65 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or 120V/230V AC adaptor, NEMA 1-15 plug (included)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986 NTEP CC 18-011 Measurement Canada AM-6097

Warranty:



PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
178518	160-10-7	20	18	6	18	16	18
179371	160-10-7BT	20	18	6	18	16	18

DIMENSIONS

	INCHES	CENTIMETERS
A	1.65	4.19
В	14.4	36.58
C	14.4	36.58
D	7.8	20
E	6.7	17

DIGITAL PHYSICIAN SCALE - LOW-PROFILE

MODEL	CAPACITY	COMMUNICATION	PART#
160-10-7	$550 \text{lb} \times 0.2 \text{lb} (250 \text{kg} \times 0.1 \text{kg})$	USB	178518
160-10-7BT	550 lb × 0.2 lb (250 kg × 0.1 kg)	USB and Bluetooth 2.0	179371

OPTIONS

DESCRIPTION	PART#
Carrying case	107445
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



MECHANICAL PHYSICIAN SCALE LB AND KG

The RL-MPS mechanical physician scale features a painted beam for weighing up to 440 pounds (200 kilograms). For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slip-resistant base cover for easy cleaning, and can be easily transported with two built-in durable wheels.



- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 24 to 84 in (60 to 210 cm)

SPECIFICATIONS

Capacity:

440 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Height Rod:

24-84 in (60-210 cm)

Height Division:

0.125 in (0.1 cm)








PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
102613	RL-MPS	60	21	7	42	64	64

DIMENSIONS

	INCHES	CENTIMETERS
A	10.75	27.3
В	14.75	37.5
C	4.125	10.5
D	22.25	56.5
E	58.5	148.6

MECHANICAL PHYSICIAN SCALE - LB AND KG

MODEL	CAPACITY	PART#
RL-MPS	440 lb × 4 oz (200 kg × 100 g)	102613

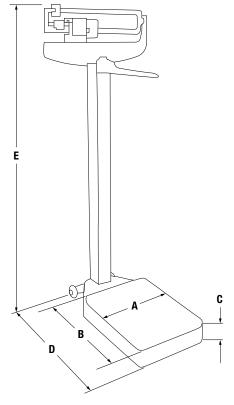



The RL-MPS-10 mechanical physician scale features a painted beam for weighing up to 450 pounds. For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slipresistant base cover for easy cleaning, and can be easily transported with two durable built-in wheels.



- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 24 to 84 inches

SPECIFICATIONS

Capacity:

450 lb x 4 oz

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in


Height Rod:

Height Division:

Warranty:





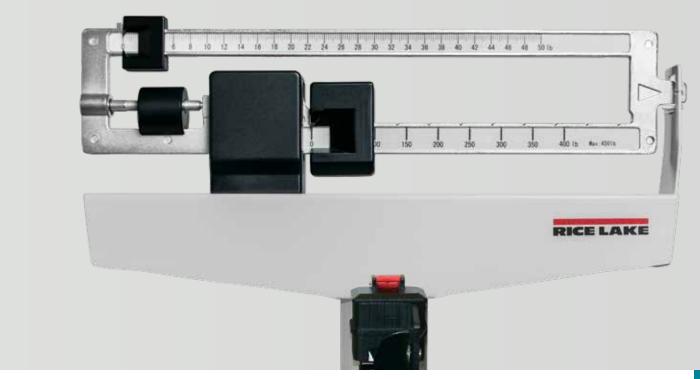


PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
124223	RL-MPS-10	60	21	7	42	64	64

DIMENSIONS

	INCHES	CENTIMETERS
A	10.75	27.3
В	14.75	37.5
C	4.125	10.5
D	22.25	56.5
E	58.5	148.6

MECHANICAL PHYSICIAN SCALE - LB ONLY

MODEL	CAPACITY	PART#
RL-MPS-10	450 lb × 4 oz	124223

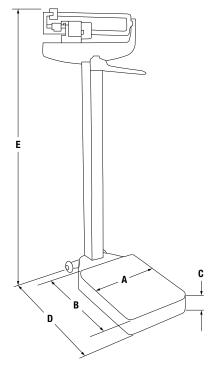

RL-MPS-20

MECHANICAL PHYSICIAN SCALE LB AND KG

The RL-MPS-20 mechanical physician scale features a painted beam for weighing up to 440 pounds (200 kilograms). For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slip-resistant base cover for easy cleaning.



FEATURES

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover

SPECIFICATIONS

Capacity:

440 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Warranty:










PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
124222	RL-MPS-20	60	21	7	36	64	64

DIMENSIONS

	INCHES	CENTIMETERS
A	10.75	27.3
В	14.75	37.5
C	4.125	10.5
D	22.25	56.5
E	58.5	148.6

MECHANICAL PHYSICIAN SCALE - LB AND KG

MODEL	CAPACITY	PART#
	440 lb × 4 oz (200 kg × 100 g)	124222

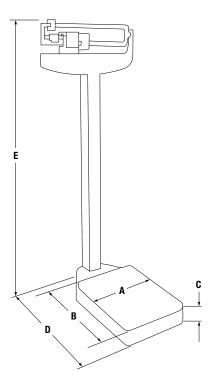

RL-MPS-30

MECHANICAL PHYSICIAN SCALE KG ONLY

The RL-MPS-30 mechanical physician scale with handpost features a painted beam for weighing up to 180 kilograms. A handpost installed at a strategic height provides enhanced support for all patients. For added convenience, weight readings can be taken from either the front or back of the scale. The RL-MPS-30 can be easily transported with two built-in wheels and its base is designed with a removable, slip-resistant base cover for easy cleaning.



- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Handpost

- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 60 to 212 cm

SPECIFICATIONS

180 kg x 100 g

Platform Dimensions:

(W x L x H) 27.5 cm x 37.5 cm x 10.5 cm

Height Division:

Height Rod:

60-212 cm














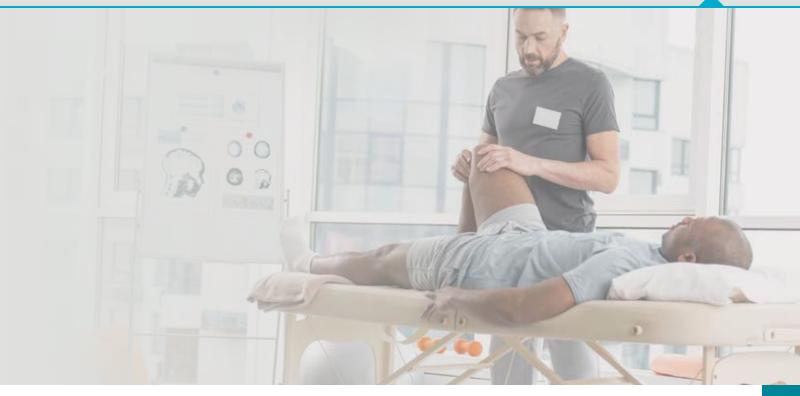


PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
132703	RL-MPS-30	60	21	7	40	64	64

DIMENSIONS

	INCHES	CENTIMETERS
A	10.75	27.3
В	14.75	37.5
С	4.125	10.5
D	22.25	56.5
E	58.5	148.6
F	31.5	80.0

MECHANICAL PHYSICIAN SCALE - KG ONLY

MODEL	CAPACITY	PART#
RL-MPS-30	180 kg × 100 g	132703

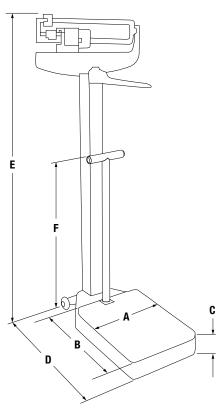

An ISO 9001 Registered Company ©2020 Rice Lake Weighing Systems 01/20 Specifications subject to change without notice. Visit ricelake.com

RL-MPS-40

MECHANICAL PHYSICIAN SCALE LB AND KG

The RL-MPS-40 mechanical physician scale features a painted beam for weighing up to 440 pounds and 490 pounds with the counterpoise weights. Weight and height can be easily read from either the front or back. The RL-MPS-40 can be easily transported with two built-in wheels and its scale base is designed with a removable, slip-resistant base cover for easy cleaning.



FEATURES

- Dual-read capacity and height rod
- Sturdy enameled steel body
- Painted beam designed to hold counterpoise weights
- Rugged scale understructure
- Removable slip-resistant plastic base cover
- Retractable aluminum height rod
- Easy operation with two sliding weights and two counterpoise weights
- Rear wheels for portability ease
- Aluminum height rod measures from 24 to 84 in (60 to 210 cm)

SPECIFICATIONS

Capacity with counterpoise weights:

490 lb x 4 oz (220 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Height Rod:

24-84 in (60-210 cm)

Height Division:

0.125 in (0.1 cm)

Warranty:
















PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
185289	RL-MPS-40	60	21	7	44	64	64

DIMENSIONS

	INCHES	CENTIMETERS
A	10.75	27.3
В	14.75	37.5
C	4.125	10.5
D	22.25	56.5
E	58.5	148.6

MECHANICAL PHYSICIAN SCALE - LB AND KG

MODEL	CAPACITY	PART#
RL-MPS-40	490 lb × 4 oz (220 kg × 100 g)	185289

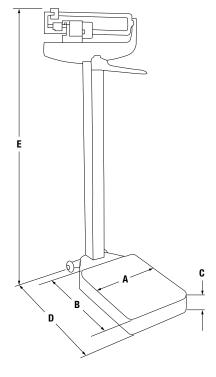

RL-MPS-50

MECHANICAL PHYSICIAN SCALE LB AND KG

Rice Lake's RL-MPS-50 mechanical physician scale is built to weigh patients up to 450 pounds (200 kilograms). The RL-MPS-50 features a height rod for monitoring growth and is designed with rear wheels for ease of transport. The poise travels freely along the weigh beam with just a tap of the finger. A distinctive, color-coded weigh beam is easy to read. Black inset displays LB markings, white inset displays KG markings. The beam can be rotated to show the desired unit of measure.



- Ease of transport with rear wheels
- Aluminum height rod included
- Poise travels free on weigh beam with simple finger tap
- Easy-to-read weigh beam's color-coded black inset shows LB markings, white inset shows KG markings. The beam can be rotated to the desired unit of measure.

SPECIFICATIONS

Capacity:

450 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 11.02 in x 14.96 in x 4.21 in

Height Division:

0.25 in (5 mm)

Height Rod:

29.5-78.75 in (75-200 cm)

Warranty:

One-year limited warranty



Weigh beam with lb markings



Weigh beam with kg markings












PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
195264	RL-MPS-50	60	21	5	39	46	46

DIMENSIONS

	INCHES	CENTIMETERS
A	11.02	28
В	14.96	38
C	4.21	10.7
D	22.24	56.5
E	58.86	149.5

MECHANICAL PHYSICIAN SCALE - LB AND KG

MODEL	CAPACITY	PART#
RL-MPS-50	$450 \text{ lb} \times 4 \text{ oz} (200 \text{ kg} \times 100 \text{ g})$	195264

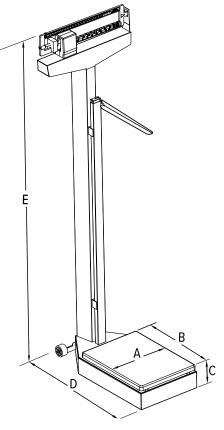

An ISO 9001 Registered Company ©2020 Rice Lake Weighing Systems 01/20 Specifications subject to change without notice. Visit ricelake.com





250-10-2

BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-2 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



FEATURES

- Handrails for extra support and safety
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 20 in x 25 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:













PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
133119	250-10-2	45	29	9	66	85	85
168350	250-10-2BT	45	29	9	66	85	85
194733	250-10-2BLE	45	29	9	66	85	85

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	20	50.8	D	25	63.5
В	25	63.5	E	34	86.4
C	3	7.6	F	44.5	113

BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
250-10-2	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	USB	133119
250-10-2BT	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	USB and Bluetooth 2.0	168350
250-10-2BLE	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	Bluetooth BLE 4.0	194733

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



250-10-4

BARIATRIC SCALE WITH HANDRAIL AND CHAIR SEAT

Rice Lake's 250-10-4 bariatric scale with handrail and chair seat is designed for weighing patients who need extra support and safety during weighments. Patients can be weighed comfortably and safely while seated with the large, stable folding seat. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

FEATURES

- Handrails for extra support and safety
- Folding seat for added comfort
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display

- BMI (body mass index) function
- Hold function
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable



Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 20 in x 25 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:





PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
133120	250-10-4	32	27	46	70	286	286
168448	250-10-4BT	32	27	46	70	286	286
194734	250-10-4BLF	32	27	46	70	286	286

DIMENSIONS


	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	2.8	7	D	21.6	54.9
В	25.7	65.3	E	32	81.1
C	25.2	64	F	47.5	120.7

BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
250-10-4	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	USB	133120
250-10-4BT	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	USB and Bluetooth 2.0	168448
250-10-4BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	Bluetooth BLE 4.0	194734

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

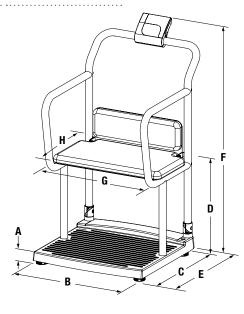









260-10-1

BARIATRIC HANDRAIL SCALE

Rice Lake's 260-10-1 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Height and weight can be seamlessly captured with the optional integrated height rod. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



- Handrails for extra support and safety
- Integrated wheels for easy transport
- Large, stable scale base

FEATURES

- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- Optional height rod installed on-site



Capacity:

800 lb x 0.2 lb (360 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 24 in x 24 in x 2.75 in

Height Rod Dimensions:

30-83.125 in (77-211 cm)

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Display

5-digit LCD display, 0.75 in (1.9 mm) digit height

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Warranty:







PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
170139	260-10-1	40	40	10	58	116	116
172958	Height Rod	33	9	3	3	7	7

DIMENSIONS


	INCHES	CENTIMETERS
A	24	61
В	24	61
C	2.75	7
D	25.5	65
E	33.5	85
F	43	109

BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
260-10-1	800 lb x 0.2 lb (360 kg × 0.1 kg)	USB	170139

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Height rod 25.5-83 in (65-211 cm)	172958
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830
*NEMA 1-15 Plug 🔲) **CEE 7/16 Plug 💿 🔾	

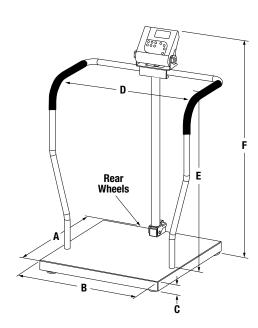









350-10-3M

DIGITAL WHEELCHAIR SCALE WITH HANDRAIL

Rice Lake's 350-10-3M is a dual ramp, metal wheelchair scale joining the 350-10 Series family. This durable scale offers accurate, high-capacity weighing for a wide range of patients. The 350-10-3M has a large, stable scale base with a non-slip surface to ensure safety during patient weighing. Easy to set up, this foldable scale can be quickly moved on two heavy-duty rear wheels for efficient patient weighing in different locations.

FEATURES

- Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)
- Platform weighing dimensions: 29.5 in x 32 in
- Two wheels for portability ease
- Motiontrap[™] (movement compensation technology)
- Large 1-inch LCD display
- Ability to manually enter the tare weight of a wheelchair

- BMI (body mass index) function
- Hold function
- Unit of measure: lb only, kg only, lb/kg
- Non-slip platform
- Dual ramp
- EMR capable, USB
- Powered by 6 AA batteries (included)

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 31.5 in x 29.5 in x 3.15 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:





PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
193956	350-10-3M	51	42	14	102	216	216

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	3.15	8	E	31.5	80
В	47.7	121	F	29.5	75
C	37.8	96	G	2.4	6
D	45.3	115	Н	27.2	69

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-3M	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	USB	193956

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

*NEMA 1-15 Plug []] **CEE 7/16 Plug (0 0)

SINGLE-RAMP WHEELCHAIR SCALE WITH HANDRAIL

Rice Lake's 350-10-2 single-ramp wheelchair scale with handrail allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. Foldable and light, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Single ramp for on/off access
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- Easy to store in closet, folded depth is 11.75 in



Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps: (W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:













PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
141445	350-10-2	42	41	14	90	174	174
168351	350-10-2BT	42	41	14	90	174	174
194739	350-10-2BLE	42	41	14	90	174	174

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	29.5	74.9	D	9.25	23.5
В	32	81.3	E	37.5	95.2
C	2.375	6	F	45	114.3

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-2	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	USB	141445
350-10-2BT	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	USB and Bluetooth 2.0	168351
350-10-2BLE	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	Bluetooth BLE 4.0	194739

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



DUAL-RAMP WHEELCHAIR SCALE WITH HANDRAIL

Rice Lake's 350-10-3 dual-ramp wheelchair scale with handrail allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. Foldable and light, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Dual ramp for on/off access
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- Easy to store in closet, folded depth is 11.75 in

SPECIFICATIONS

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

(W x L x H) 32 in x 29.5 in x 2.375 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:













PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
141447	350-10-3	51	42	14	102	216	216
168353	350-10-3BT	50	41	13	98	192	192
194736	350-10-3BLE	50	41	13	98	192	192

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	D	9.25	23.5
В	32	81.3	E	38	96.5
C	2.375	6.0	F	45	114.3

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-3	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	USB	141447
350-10-3BT	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	USB and Bluetooth 2.0	168353
350-10-3BLE	1,000 lb x 0.2 lb (450 kg × 0.1 kg)	Bluetooth BLE 4.0	194736

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830



DUAL-RAMP WHEELCHAIR SCALE WITH SEAT AND HANDRAIL

Rice Lake's 350-10-4 dual-ramp wheelchair scale with seat and handrail allows high capacity, accurate weighing for patients requiring a seat. The padded seat easily tucks away, allowing this model to function as either a wheelchair or chair scale. Convenient keypad tare reduces errors and increases efficiency. Foldable and light, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Dual ramp for on/off access
- Fold-away padded seat with backrest
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable



Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 32 in x 29.5 in x 2.375 in

Chair Dimensions:

(W x D) 12 in x 6.25 in

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14 C to 40° C)

Approvals:

c-Met, E113986

Warranty:













PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
141448	350-10-4	51	43	21	132	332	332
168354	350-10-4BT	51	43	21	132	332	332
194737	350-10-4BLE	51	43	21	132	332	332

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	E	38	96.5
В	32	81.3	F	45	114.3
C	2.375	6.0	G	6.25	15.9
D	9.25	23.5	Н	12	30.5

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-4	$1,000 \text{lb} \times 0.2 \text{lb} (450 \text{kg} \times 0.1 \text{kg})$	USB	141448
350-10-4BT	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	USB and Bluetooth 2.0	168354
350-10-4BLE	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	Bluetooth BLE 4.0	194737

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

SINGLE-RAMP WHEELCHAIR PLATFORM SCALE

Rice Lake's 350-10-7 single-ramp wheelchair platform scale allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. This sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Single ramp for on/off access
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:















PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
141446	350-10-7	45	44	7	78	100	100
168352	350-10-7BT	45	44	7	78	100	100
194738	350-10-7BLE	45	44	7	78	100	100

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	29.5	74.9	D	9.25	23.5
В	32	81.3	E	37.5	95.3
C	2.375	6.0		•	

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-7	1,000 lb × 0.2 lb (450 l	kg x 0.1 kg) USB	141446
350-10-7B	Γ 1,000 lb × 0.2 lb (450 l	$kg \times 0.1 kg$) USB and Bluetooth :	2.0 168352
350-10-7Bl	_E 1,000 lb × 0.2 lb (450 l	kg × 0.1 kg) Bluetooth BLE 4.0	194738

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

DUAL-RAMP WHEELCHAIR PLATFORM SCALE

Rice Lake's 350-10-8 dual-ramp wheelchair platform scale allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. This sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Dual ramp for on/off access
- Integrated wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function

- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps: (W x L x H) 35 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)



Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:



PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
141449	350-10-8	53	45	7	86	121	121
168355	350-10-8BT	53	45	7	86	121	121
194735	350-10-8BLF	53	45	7	86	121	121

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	D	9.25	23.5
В	32	81.3	E	38	96.5
C	2.375	6.0			•

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
350-10-8	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	USB	141449
350-10-8BT	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	USB and Bluetooth 2.0	168355
350-10-8BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	Bluetooth BLE 4.0	194735

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830









RL-350-5

SINGLE-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE 34 INCHES WIDE

Rice Lake's RL-350-5 single-ramp portable bariatric wheelchair scale allows high capacity, accurate weighing for patients who are unable to be transported to a scale. Featuring a 34-inch scale base with single ramp, wheelchairs can easily be wheeled on and off the scale. Convenient keypad tare reduces errors and increases efficiency. For added safety, this scale features an anti-slip rubber surface and raised edges on the weighing platform.

FEATURES

- Single ramp for on/off access
- Integrated handles and wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank

- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable
- 10 ft cable between scale base and indicator



SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 34 in x 34 in x 2.22 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met (pending)

Warranty:












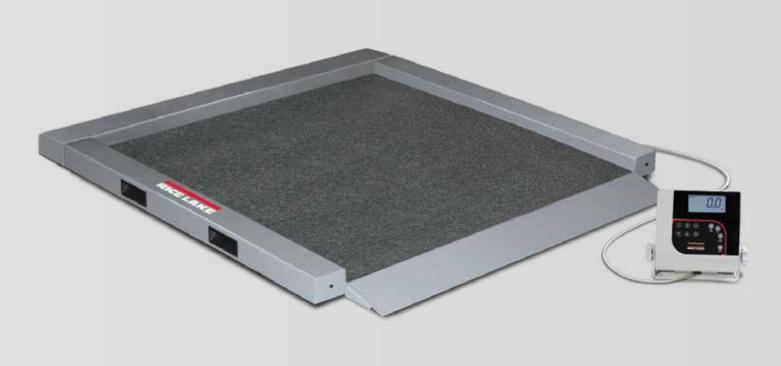

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
150703	RL-350-5	43	43	11	162	147	162
168357	RL350-5BT	43	43	11	162	147	162

DIMENSIONS

	INCHES	CENTIMETERS
A	41	104.1
В	40	101.6
C	2.22	5.6
D	34	86.4
E	34	86.4



MODEL	CAPACITY	COMMUNICATION	PART#
RL-350-5	$1,000 \text{ lb} \times 0.2 \text{ lb} (450 \text{ kg} \times 0.1 \text{ kg})$	USB	150703
RL-350-5BT	$1,000 \text{ lb} \times 0.2 \text{ lb} (450 \text{ kg} \times 0.1 \text{ kg})$	USB and Bluetooth	168357

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switchin	g* 133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45	s, 6ft 186830

RL-350-6

DUAL-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE 34 INCHES WIDE

Rice Lake's RL-350-6 dual-ramp portable bariatric wheelchair scale allows high capacity, accurate weighing for patients who are unable to be transported to a scale. Featuring a 34-inch scale base with dual-ramp, wheelchairs can easily be wheeled on and off the scale. Convenient keypad tare reduces errors and increases efficiency. For added safety, this scale features an anti-slip rubber surface and raised edges on the weighing platform.

FEATURES

- Dual ramp for on/off access
- Integrated handles and wheels for easy transport
- Large, stable scale base
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank

- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- 10 ft cable between scale base and indicator



Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 34 in x 34 in x 2.22 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height


Approvals:

c-Met (pending)

Warranty:






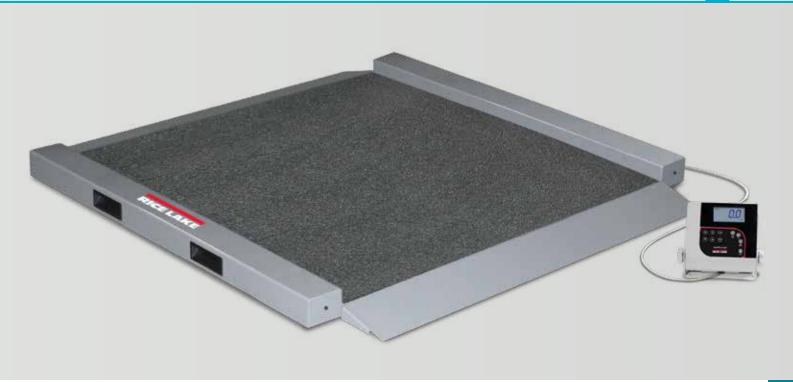

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
150704	RL-350-6	43	43	11	154	147	154
168358	RL-350-6BT	43	43	11	154	147	154

DIMENSIONS

	INCHES	CENTIMETERS
A	41	104.1
В	40	101.6
C	2.22	5.6
D	34	86.4
E	34	86.4

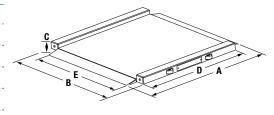

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
RL-350-6	$1,000 \text{ lb} \times 0.2 \text{ lb} (450 \text{ kg} \times 0.1 \text{ kg})$	USB	150704
RL-350-6BT	1,000lb × 0.2lb (450kg × 0.1kg)	USB and Bluetooth	168358

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

SB-1150

SUMMIT™ BARIATRIC WHEELCHAIR SCALE

The Summit[™] SB-1150 bariatric wheelchair scale provides exceptional performance in environments where typical wheelchair scales are not large enough to meet patient needs. With its large platform and easy-access ramp, the heavy-duty Summit SB-1150 accommodates wheelchairs without sacrificing safety. The scale and ramp are equipped with a non-skid rubber surface and raised guide rails. Convenient keypad tare reduces errors and increases efficiency.

FEATURES

- Heavy-duty mild steel construction
- Single ramp for on/off access
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank
- Units of measure: lb only, kg only, lb/kg
- Motiontrap™ movement compensation technology
- EHR capable
- 10 ft cable between scale base and indicator

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 36 in x 36 in x 4 in

Ramp Dimensions:

5-digit LCD display, 0.75 in (1.9 mm)

Battery Type:

(optional)

Power:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Warranty:

Two-year limited warranty

Approvals:

c-Met (pending)

















PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT.* (LB)	DIM WGT.* (LB)	SHIPPING WGT.* (LB)
150706	SB-1150	49	48	24	363	407	407
168359	SB-1150BT	49	48	24	363	407	407

^{*}Pallet weight and dimensions are included in shipping weights

DIMENSIONS

	INCHES	CENTIMETERS
A	36	91.4
В	36	91.4
C	28.5	72.4
D	36	91.4
E	4	10.2
F	1	2.5

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
SB-1150	$1,000 \text{lb} \times 0.2 \text{lb} (450 \text{kg} \times 0.1 \text{kg})$	USB	150706
SB-1150BT	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	USB and Bluetooth 2.0	168359

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

SD-1150-WP

DIALYSIS WHEELCHAIR SCALE

The Summit[™] SD-1150-WP dialysis wheelchair scale is designed to accommodate the unique needs of dialysis patients. It is designed to be pit-mounted flush with the floor for multipurpose weighing. Its heavy-duty handrail enhances patient safety and convenience, and is positioned to remain clear of wheelchairs. Convenient keypad tare reduces errors and increases efficiency.



FEATURES

- Package includes scale, pit frame, handrail and indicator
- Heavy-duty mild steel construction
- Handrail for added patient safety
- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Ability to manually enter the tare weight of additional items, such as a wheelchair or oxygen tank

- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable
- 10 ft cable between scale base and indicator

SPECIFICATIONS

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 36 in x 36 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Warranty:

Two-year limited warranty

Approvals:

c-Met (pending)











PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT.* (LB)	DIM WGT.* (LB)	SHIPPING WGT.* (LB)
150707	SD-1150-WP	40	39	15	246	169	246
168360	SD-1150-WPBT	40	39	15	246	169	246

^{*}Pallet weight and dimensions are included in shipping weights

DIMENSIONS

	INCHES	CENTIMETERS
A	36	91.4
В	36	91.4
C	3	7.6
D	31.5	80.0
E	37	94.0

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
SD-1150-WP	1,000 lb × 0.2 lb (450 kg × 0.1 kg)	USB	150707
SD-1150-WPBT	$1,000 \text{ lb} \times 0.2 \text{ lb} (450 \text{ kg} \times 0.1 \text{ kg})$	USB and Bluetooth 2.0	168360

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

*NEMA 1-15 Plug [] | **CEE 7/16 Plug ()

D300

WIRELESS WHEELCHAIR SCALE

The lightweight yet durable D300 Series wireless wheelchair scale consists of four pads to weigh wheelchair-bound patients in environments where portability is key. The wheelchair is simply rolled onto the four pads, which communicate wirelessly to the handheld controller. Measurements from each pad are automatically combined and the total weight is displayed.

FEATURES

- Four lightweight, wireless scale pads
- Powder-coated molded plastic and cast aluminum construction
- Four wheel-stops and roll-up ramps
- Handheld controller
- Rubber controller glove and lanyard
- Optional carrying case



Wheelchair Positioned on Pads

SPECIFICATIONS

Capacity:

D300-8: 800 lb x 0.5 lb (363 kg x 0.2 kg)

Power:

Wheel pads: Eight EL-123 batteries per scale system (two per pad) (included) Controller: Three AAA lithium batteries (included)

Operating Temperature:

50° F to 90° F (14° C to 35° C)

Warranty:











PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
157141	D300-8	17	13	13	15	21	21

WHEELCHAIR SCALE

MODEL	CAPACITY	PART#
D300-8	$800 \text{lb} \times 0.5 \text{lb} (363 \text{kg} \times 0.2 \text{kg})$	157141

DESCRIPTION	PART#
Carrying case	107445



Optional Transport/Carrying Case



CHAIR SCALES DIGITAL AND MECHANICAL

DIGITAL CHAIR SCALE 17 INCH WIDE SEAT

The Rice Lake 550-10-1 digital chair scale is designed for patients who find it difficult to, or cannot, stand. The molded plastic seat is easy to clean, comfortable and safe up to 660 pounds. Swing-up arms enable easy access from either side, and a flip-up footrest can be used for additional patient comfort. A large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Enameled tubular steel frame
- Four heavy-duty locking caster wheels
- Swing-up arms
- Flip-up footrest
- Push-button LCD display

- BMI (body mass index) function
- Hold function
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable



Capacity:

660 lb x 0.2 lb (300 kg x 0.1 kg)

Power:

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adaptor (optional)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:


50° F to 104° F (14° C to 40° C)

Approvals:

c-Met, E113986

Warranty:



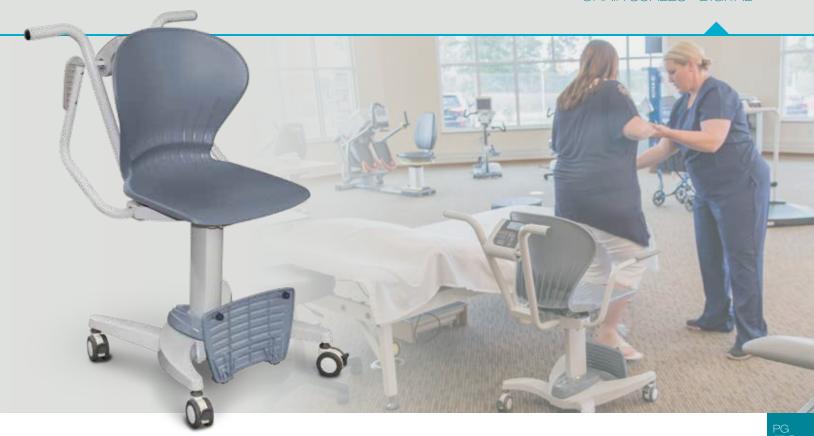

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
119114	550-10-1	29	27	30	56	169	169
168349	550-10-1BT	29	27	29	54	164	164
194740	550-10-1BLE	29	27	29	54	164	164


DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	37.4	95	E	17	43.2
В	33.4	85	F	16	40.6
C	25.2	64	G	17	43.2
D	20.5	52		• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •

DIGITAL CHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
550-10-1	660 lb × 0.2 lb (300 kg x 0.1 kg)	USB	119114
550-10-1BT	660 lb × 0.2 lb (300 kg x 0.1 kg)	USB and Bluetooth 2.0	168349
550-10-1BLE	660 lb × 0.2 lb (300 kg x 0.1 kg)	Bluetooth BLE 4.0	194740

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

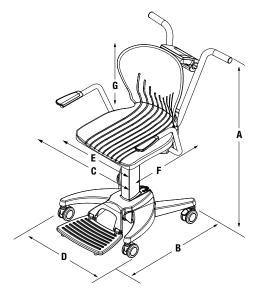









DIGITAL CHAIR SCALE 20-INCH WIDE SEAT

The Rice Lake 560-10-1 digital chair scale is designed for patients who find it difficult to, or cannot, stand. Two armrests and two footrests can be lifted separately for convenient patient access. The 20-inch wide molded plastic seat is easy to clean, comfortable and safe up to 660 pounds. A large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Enameled tubular steel frame
- Four heavy-duty caster wheels (rear wheels locking)
- Lift-away arms
- One and a half foot-wide molded plastic seat
- Side-folding footrests

- Push-button LCD display
- BMI (body mass index) function
- Hold function
- Units of measure: lb only, kg only, lb/kg
- Motiontrap[™] movement compensation technology
- EHR capable



Capacity:

660 lb x 0.2 lb (300 kg x 0.1 kg)

Power

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adaptor (optional)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Warranty:













PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
166644	560-10-1	33	23	27	65	148	148

DIMENSIONS

	INCHES	CENTIMETERS
A	20.1	51.0
В	17.3	44.0
C	20.1	51.0
D	36.4	92.5
E	5.9	15.0
F	42.9	109.0
G	34.6	88.0

DIGITAL CHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART#
560-10-1	$660 \text{lb} \times 0.2 \text{lb} (300 \text{kg} \times 0.1 \text{kg})$	USB	166644

OPTIONS

DESCRIPTION	PART#
9 VDC adaptor, 120 V/230V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

*NEMA 1-15 Plug [] | **CEE 7/16 Plug (0 0)

RL-MCS

MECHANICAL CHAIR SCALE 16 INCH WIDE SEAT

The RL-MCS mechanical chair scale is designed for weighing those who find it difficult or unsafe to stand on a conventional scale. The smooth, durable molded plastic seat is comfortable, and the swing-up arms lift for easy patient transport. The sturdy, enameled steel frame has four heavy-duty wheels for easy, quiet maneuvering. Clinics, nursing homes, and rehabilitation centers will find the sleek, professional design easy to clean.

FEATURES

- Capacity: Lb only beam 440 lb x 4 oz;
 kg only beam 200 kg x 100 g
- Swing-up arms for easy access and exit
- Fold-up footrest
- Sturdy, enameled steel frame

- Dual-read die cast beam
- Polypropylene seat with ABS armrest
- Heavy duty wheels two back wheels lock, two front wheels swivel



Capacity:

Lb only beam 440 lb x 4 oz Kg only beam 200 kg x 100 g

Warranty:












PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
172098	8 RL-MCS-LB	29	25	25	79	131	131
172099	9 RL-MCS-KG	29	25	25	79	131	131

DIMENSIONS

	INCHES	CENTIMETERS
A	21.5	54.7
В	14.2	36
C	14.8	37.5
D	16	40.6
E	35.7	90.8
F	38.4	97.5

MECHANICAL CHAIR SCALE

MODEL	CAPACITY	PART#
RL-MCS-LB	450 lb x 4 oz	172098
RL-MCS-KG	200 kg x 100 g	172099

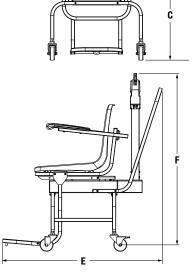



PEDIATRIC SCALES DIGITAL AND MECHANICAL

RL-DBS DIGITAL BABY SCALE

The RL-DBS digital baby scale accurately weighs and measures even the most active babies. Simply place the baby on the scale, remove the baby and recall its weight by pressing the Recall key. The RL-DBS is portable, extremely durable, and easy to clean and maintain.

FEATURES

- Large, easy-to-read one-inch LCD display
- Lb or kg locking capability
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)





44 lb x 0.5 oz (20 kg x 10 g)

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Approvals:

AC adaptor: UL and C-UL

Warranty:















PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
107423	RL-DBS 120V	28	18	6	8	22	22
112571	RL-DBS 230V	27	18	6	10	21	21


DIMENSIONS


	INCHES	CENTIMETERS
A	3.9	9.9
В	15.0	38.1
C	3.1	7.9
D	23.6	60.9
E	11	27.9



MODEL	CAPACITY		PART#
RL-DBS	$44 \text{ lb} \times 0.5 \text{ oz} (20 \text{ kg} \times 10 \text{ g})$	120 V AC Adaptor	107423
RL-DBS	44 lb × 0.5 oz (20 kg × 10 g)	230 V AC Adaptor	112571

DESCRIPTION	PART#
Carrying case	112570
Growth chart, birth to 36 months, boy, contains 100 sheets	158463
Growth chart, birth to 36 months, girl, contains 100 sheets	158464
Growth chart, 2-20 years, boy, contains 100 sheets	158465
Growth chart, 2-20 years, girl, contains 100 sheets	158466



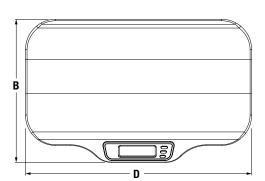

RL-DBS-2

DIGITAL BABY SCALE DUAL RANGE

The RL-DBS-2 digital baby scale accurately weighs and measures even the most active babies, up to 44 pounds. Dual-range functionality provides enhanced precision for weighments from zero to 22 pounds with accuracy within 0.2 ounces. Simply place the baby on the scale, remove the baby and recall its weight by pressing the Recall key. The RL-DBS-2 is portable, extremely durable, and easy to clean and maintain.

FEATURES

- Large, easy-to-read one-inch LCD display
- Dual-range capacity for increased precision from 0-22 lb
- Accuracy within five grams
- Lb or kg locking capability

- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)
- Optional carrying case



Capacity:

0-22 lb x 0.2 oz (0-10 kg x 5 g) 22-44 lb x 0.5 oz (10-20 kg x 10 g)

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type

Approvals:

AC adaptor: UL and C-UL

Warranty:

Two-year limited warranty




Optional carrying case









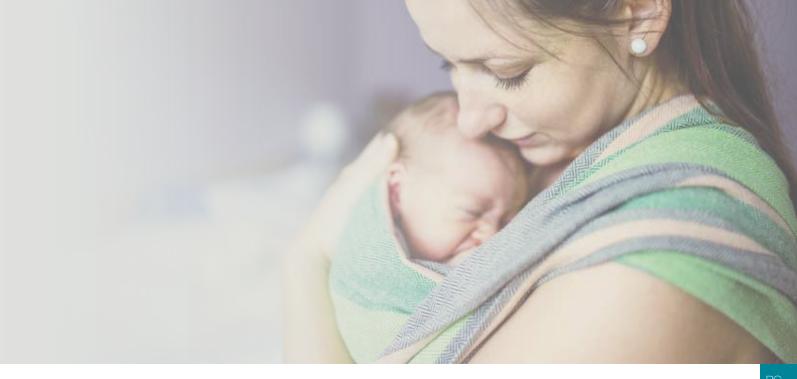

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
155922	RL-DBS-2 120V	28	18	6	10	22	22
155923	RL-DBS-2 230V	28	18	6	10	22	22


DIMENSIONS


	INCHES	CENTIMETERS
A	3.9	9.9
В	15.0	38.1
C	3.1	7.9
D	23.6	60.9
E	11	27.9




MODEL	CAPACITY		PART#
RL-DBS-2	0-22 lb × 0.2 oz, 22-44 lb × 0.5 oz (0-10 kg × 5g, 10-20 kg × 10 g)	120 V AC Adaptor	155922
RL-DBS-2	0-22 lb × 0.2 oz, 22-44 lb × 0.5 oz (0-10 kg × 5g, 10-20 kg × 10 g)	230 V AC Adaptor	155923

DESCRIPTION	PART#
Carrying case	112570
Growth chart, birth to 36 months, boy, contains 100 sheets	158463
Growth chart, birth to 36 months, girl, contains 100 sheets	158464
Growth chart, 2-20 years, boy, contains 100 sheets	158465
Growth chart, 2-20 years, girl, contains 100 sheets	158466





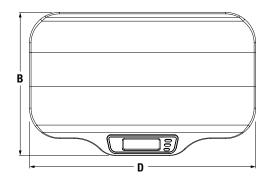

650-10-1 NEONATAL SCALE DUAL RANGE

The 650-10-1 neonatal baby scale precisely weighs even the most active babies up to 33 pounds. Motiontrap™ movement compensation technology compensates for involuntary movements and provides a stable, accurate weight reading. Enhanced precision is essential especially when weighing premature infants. The 650-10-1 provides these precise weighments from zero to 10 pounds with accuracy within 0.05 ounces. A two-sided removable tray keeps babies safe and a built-in measuring tape ensures quick and easy measurements.

FEATURES

- Large, easy-to-read 0.75 in LCD display
- Dual-range capacity for increased precision from 0-10 lb
- Lb or kg locking capability

- Automatic shut-off for long battery life
- Motiontrap™ movement compensation technology
- Built-in measuring tape 0-23.5 in x
 0.125 in (0-60 cm x 0.25 cm)

SPECIFICATIONS

Capacity:

0-10 lb x 0.05 oz (0-5 kg x 1 g) 10-33 lb x 0.1 oz (5-15 kg x 2 g)

Power:

12 VDC, provided by six AA lithium batteries (included) or AC adaptor (optional)

Battery Type:

Six Li-FeS2 batteries

Operating Temperature:

50° F to 95° F (14° C to 35° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met E113986

Warranty:













PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
161784	650-10-1	18	28	11	25	40	40

DIMENSIONS

	INCHES	CENTIMETERS
A	24	60.8
В	19	48.2
C	6.75	17.1
D	17	43.5

NEONATAL SCALE

MODEL	CAPACITY	POWER	PART#
650-10-1	0-10 lb \times 0.05 oz, 10-33 lb \times 0.1 oz (0-5 kg \times 1 g, 5-15 kg \times 2 g)	120 V/230V	161784

OPTIONS

DESCRIPTION	PART#
AC adaptor, c-Met, medical grade	165138

RL-MIS

MECHANICAL BABY SCALE LB AND KG BEAM

The RL-MIS mechanical baby scale provides safe, reliable measurement for infants of all sizes. An easy-to-clean tray also features a built-in measurement tape for simple length reference. The sturdy, painted beam offers dual-read capacity up to 135 pounds or 62 kilograms.

FEATURES

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Dual-read capacity; lb and kg
- Built-in measuring tape 0-23 in (0-58 cm)

Warranty:

Two-year limited warranty











PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
131470	RL-MIS	28	20	14	30	57	57

MECHANICAL BABY SCALE - LB AND KG BEAM

MODEL	CAPACITY	PART#
RL-MIS	135 lb × 1 oz (62 kg × 20 g)	131470

RL-MIS-20

MECHANICAL BABY SCALE KG BEAM

The RL-MIS-20 mechanical baby scale provides safe, reliable metric measurements for infants of all sizes. An easy-to-clean tray also features a built-in measurement tape for simple length reference. The sturdy, painted beam offers capacity readings up to 70 kilograms.

FEATURES

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Unit of measure: kg
- Built-in measuring tape 0-58 cm


SPECIFICATIONS









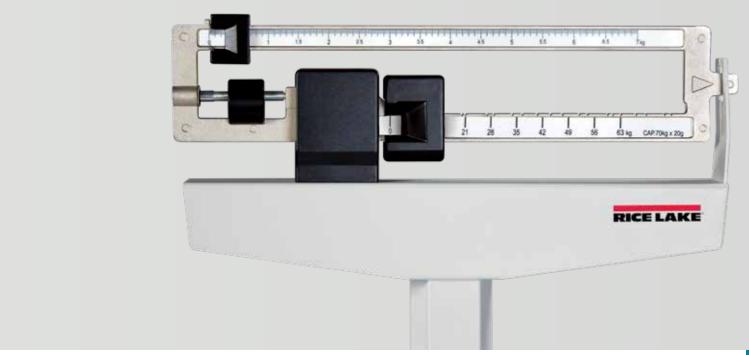

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
131471	RL-MIS-20	28	20	14	30	57	57

MECHANICAL BABY SCALE

MODEL	CAPACITY	PART#
RL-MIS-20	70kg × 20g	131471

D400

ADULT AND CHILD SCALE

The D400 adult and child scale allows children to be weighed while being safely held by an adult. Powered by either battery or AC adaptor, caregivers can keep an infant or young child safe in any location without sacrificing precision of weight readings.

FEATURES

- Large, stable scale base
- LCD display
- Standard or Adult and Child weighing mode
- Tap to turn on
- Auto power-off ensures long battery life
- Master power switch to prevent power-on during transport
- Units of measure: lb, kg
- Scale capacity switches from pounds to ounces when tare function for adult weight is used
- Optional carrying case

SPECIFICATIONS

Capacity:

No tare entered: 0-100 lb x 0.1 lb; 100-440 lb x 0.2 lb Tare entered: 0-100 lb x 2 oz; 100-400 lb x 4 oz Metric: 0-50 kg x 0.05 kg; 5

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Warranty:





PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
157108	D400	17	15	6	9	12	12

DIMENSIONS


	INCHES	CENTIMETERS
A	12.68	32.2
В	12.68	32.2
C	1.97	5.0

ADULT AND CHILD SCALE

MODEL	CAPACITY	PART#
D400	440 lb (220 kg)	157108

OPTIONS

DESCRIPTION	PART#
Carrying case	107445

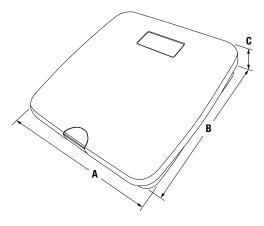







DIGITAL BABY SCALE

The OS-10/OS-25/OS-45 suspended infant scale is a portable device for the safe, accurate weighing of infants and toddlers up to 99 pounds (45 kilograms). Designed for use in any health environment, the OS-10/OS-25/OS-45 suspended infant scale is easily transported and powered by two AA batteries. Conveniently lift the infant using the sturdy, steel s-hook attached to the optional canvas trousers. This pediatric scale is versatile in its applications, and the innovative weighing technique captures vital information safely and accurately.

FEATURES

- Hold function
- Units of measure kg/lb/lb-oz
- Adjustable automatic shut-off
- Ergonomic handheld design
- Carrying case and top s-hook included

SPECIFICATIONS

Capacity:

OS-10: 22 lb x 0.02 lb (22 lb x 0.25 oz) (10 kg x 0.01 kg) OS-25: 55 lb x 0.05 lb (55 lb x 0.5 oz) (25 kg x 0.02 kg) OS-45: 99 lb x 0.1 lb (99 lb x 1 oz) (45 kg x .05 kg)

Power:

Battery operated, two AA batteries included

Operating Temperature:

32° F to 104° F (6° C to 40° C)

Warranty:









Carrying case

PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
130292	OS-10	10	5	3	2	2	2
130293	OS-25	10	5	3	2	2	2
130294	OS-45	10	5	3	2	2	2

Sturdy steel closed loop S-hook for safety

DIMENSIONS


	INCHES	CENTIMETERS
A	14.27	36.25
В	3.62	9.2
C	1.26	3.2
D	11.56	29.35

SUSPENDED INFANT SCALE

MODEL	CAPACITY	PART#
OS-10	22 lb \times 0.02 lb (22 lb \times 0.25 oz) (10 kg \times 0.01 kg)	130292
OS-25	55 lb $ imes$ 0.05 lb (22 lb $ imes$ 0.5 oz) (25 kg $ imes$ 0.02 kg)	130293
OS-45	99 lb \times 0.1 lb (22 lb \times 1 oz) (45 kg \times 0.05 kg)	130294

OPTIONS

DESCRIPTION	PART #
Suspended pediatric sling seat trousers	141444

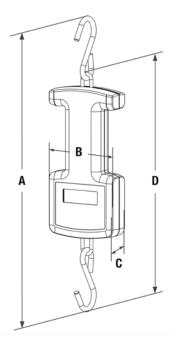



RL-PCT-10

PEDIATRIC CIRCUMFERENCE TAPE

FEATURES

- Button to make tape retract around measurement surface for accurate body measurements
- Easy to read measurements, inches on one side centimeters on the other side
- Compact and portable

PEDIATRIC CIRCUMFERENCE TAPE

MODEL	DESCRIPTION	PART#
RL-PCT-10	0-205cm × 1 mm; 0-80in × 1/8in	186608



RL-PMM

PEDIATRIC MEASURING MAT

FEATURES


- Graduations in inches and centimeters along both edges for easy viewing (PN 180124)
- Graduations in centimeters along both edges for easy viewing (PN 182999)
- Washable surface
- Fixed head positioner with sliding foot piece

- Soft, flexible, latex free material
- Head positioner and foot piece designed with rounded edges for safety
- Carry handle and lightweight design for easy portability

PEDIATRIC MEASURING MAT

MODEL	DESCRIPTION	PART#
RL-PMM-10	4in-39in (20cm-99cm) measuring range, 1/4in (5mm) graduation	180124
RL-PMM-20	20cm-99cm measuring range, 5mm graduation	182999


80

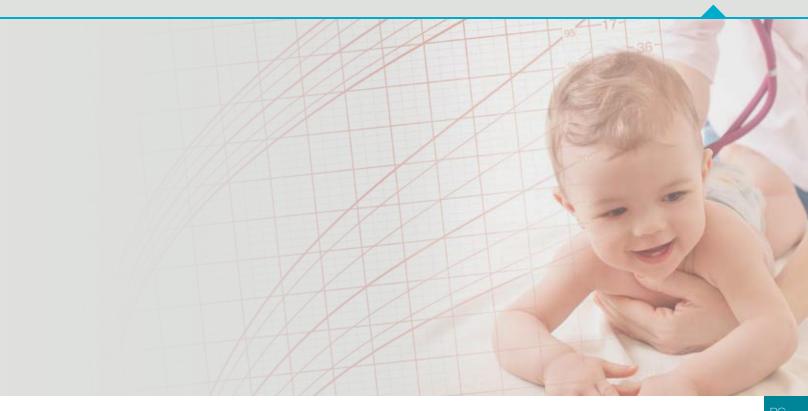

GROWTH CHART BOY AND GIRL

GROWTH CHART

DESCRIPTION	PART#
Growth chart, birth to 36 months, boy, pack of 100 sheets	158463
Growth chart, birth to 36 months, girl, pack of 100 sheets	158464
Growth chart, 2-20 years, boy, pack of 100 sheets	158465
Growth chart, 2-20 years, girl, pack of 100 sheets	158466

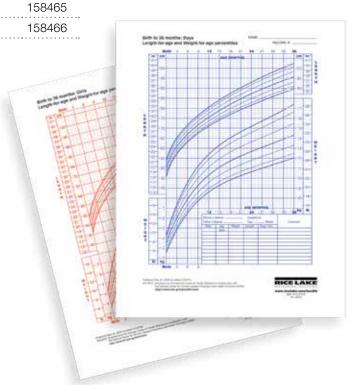



WALL MOUNT STADIOMETER

Rice Lake's RL-WMS-10 wall mount stadiometer accurately measures height between 23 and 82 inches (60 and 210 centimeters). The RL-WMS-10 measures divisions of 1/16 inch (one millimeter). Users can quickly and easily obtain heights in either inches or centimeters. The aluminum-constructed RL-WMS-10 can be folded for compact storage when not in use and includes hardware for wall mounting.



FEATURES

- Aluminum construction
- Folding head piece making the product compact when not in use
- Measures both inches and cm
- Hardware included for mounting to metal, wood or sheet rock walls

SPECIFICATIONS

Master Carton:

10 stadiometers per master carton


Measurement Range:

23 to 82 in (60 to 210 cm)

Height Divisions:

1/16 in (1 mm)

Warranty:

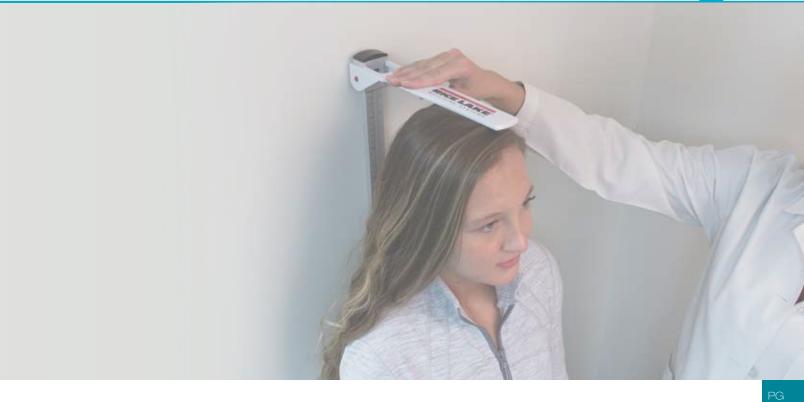

STADIOMETER

MODEL	CAPACITY	PART#
RL-WMS-10	23-82 x 1/16 in (60-120 cm x 1 mm)	195263











RL-440HH

DIGITAL HOME HEALTH SCALE

The RL-440HH digital home health scale features the latest digital technology in a sleek professional form. The 1.5 inch, bright LCD display shows weight in pounds, kilograms or stones. The auto hold function continues to show weight value on the display, even after stepping off of the scale. Tap to turn on; it automatically switches off.

FEATURES

- Durable platform with non-slip surface
- Large 1.5 in LCD display
- Tap to turn on

- Auto hold keeps weight value on display
- Auto power-off ensures long battery life
- Units of measure: lb, kg, st

SPECIFICATIONS

Capacity:

440 lb x 0.2 lb (200 kg x 0.1 kg) (1-10 st x 0.5 lb; 10-31 st x 1 lb) st = stone

Battery Type:

CR-2032 3V Lithium (included)

Warranty:








PART #	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
112566	RL-440HH	15	15	4	4	7	7

DIMENSIONS

	INCHES	CENTIMETERS
A	12.9	32.8
В	13.7	34.8
C	1.625	4.1



MODEL	CAPACITY	PART#
RL-440HH	440lb x 0.2lb (200kg x 0.1kg) (1-10st x 0.5lb; 10-31st x 1lb)	112566

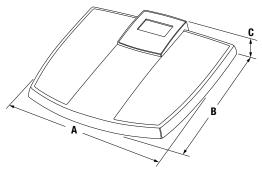







DIAL HOME HEALTH SCALE

The RL-330HHL is a dial home health scale that displays weight in pounds while the RL-330HHD is a dial home health scale that displays weight in pounds and kilograms. The expansive steel base features a large non-slip platform and a nearly eight-inch diameter dial. Bright markers can be used for record and goal keeping.



- Units of measure: lb (RL-330HHL);lb, kg (RL-330HHD)
- Colorful markers to track weight values


Warranty:



PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
113500	RL-330HHD	19	12	6	9	10	10
110592	RL-330HHL	19	13	5	9	9	9

DIMENSIONS

	INCHES	CENTIMETERS
A	11.22	28.5
В	16.93	43
C	2.5	6.4
D	7.87	20

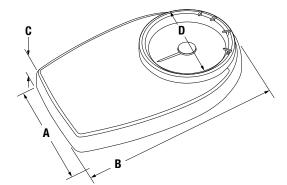

DIAL HOME HEALTH SCALE

MODEL	CAPACITY		PART#
RL-330HHD	330 lb x 1 lb (150 kg x 0.5 kg)	lb and kg	113500
RL-330HHL	330 lb x 1 lb	lb markings only	110592

DHH-10 DIGITAL

HOME HEALTH SCALE

Rice Lake's DHH-10 digital home health scale is designed to efficiently weigh up to 440 pounds (200 kilograms). Users can alternate between pound and kilogram weighing with a simple press of a button. Featuring a bright LCD display and tempered glass weighing surface, the DHH-10 is battery operated and indicates to users when power is low. An optional DHH-10BT Bluetooth model can be synced with the AccuroFit application on Apple and Android mobile devices for personalized health monitoring.

FEATURES

- 8 mm tempered safety glass weighing surface
- Battery operation
- Low battery indication

- Display lb or kg with the simple press of a button
- Large LCD display

SPECIFICATIONS

Master Carton:

(2) scales contained in each master carton

Capacity:

440 lb x 0.2 lb (200 kg x 0.1 kg)

Battery Type:

(2) AAA alkaline batteries (included)

Warranty:

One-year limited warranty

DHH-10BT:

Designed to work with AccuroFit App available for Apple and Android














PART#	MODEL#	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
195261	DHH-10	18	15	4	13.7	7.8	13.7
195262	DHH-10BT	18	15	4	13.7	7.8	13.7

DIMENSIONS

INCHES	CENTIMETERS
15.4	39
11.8	30
0.984	2.5
	15.4 11.8

DIAL HOME HEALTH SCALE

MODEL	CAPACITY		PART#
DHH-10	440 lb x 0.2 lb (200 kg x 0.1 kg)		195261
DHH-10BT	440 lb x 0.2 lb (200 kg x 0.1 kg)	with Bluetooth	195262

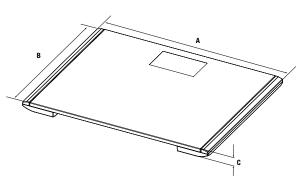



TUNING FORK ENHANCED BALANCE



FEATURES

- External weight calibration
- Seven-segment (main)/16-segment (sub) display
- Selectable modes: Weighing, Counting,
 Percentage, Coefficient, Specific Gravity,
 Statistics, Animal and Formulation
- Mono-metal tuning fork technology (MMTF) provides quick response and stability

- 30-step bar graph display
- 100-240 VAC adapter included
- AA dry-cell port, (150 hours continuous use with LCD backlight and communication signal ON)
- RS-232 and USB
- Glass breeze break (TE-223 and TE-623 only)
- NTEP Certified (COC 17-104)

SPECIFICATIONS

	TE-223^	TE-623^	TE-3202	TE-6202	TE-15001
Part#	187600	186030	186035	186036	186037
Capacity	220 g	620 g	3,200 g	6,200 g	15,000 g
Resolution	0.001 g	0.001 g	0.01 g	0.01 g	0.1 g
NTEP Resolution	0.01 g	0.01 g	0.1 g	0.1 g	1.0 g
Operating Modes	We	eighing, Counting, Percentage	e, Coefficient, Specific Gravity	, Statistics, Animal, Formula	tion
Repeatability			1 division		
Linearity			1 division		
Operating Temperature			41° F to 95° F (5° C to 35° C)	
Pan Size		6 in #mm)		6.3 in x 7.1 in (160 mm x 180 mm)	
Dimensions		1 in x 11.8 in 3 mm x 301 mm)	(2	10.4 in x 7.5 in x 3.4 in 265 mm x 191.5 mm x 86 mn	n)
RS-232 Specifications	,	Baud Rate 1200, 240	00, 480, 9600, 19200, 38400	, 57600, 115200 bps	
Est. Ship Weight	6.5 lb	(3 kg)		6.0 lb (2.7 kg)	
Power		100-240VAC	adapter, AA dry cell (batteries	s not included)	
Approvals			NTEP CC 17-104	•	
Warranty			Five-year Limited Warranty	1	
Return Policy			Rice Lake Standard Policy		
Gram	220 x 0.001 g	620 x 0.001 g	3,200 x 0.01 g	6,200 x 0.01 g	15,000 x 0.1 g
Carat	1,100 x 0.01 ct	3,100 x 0.01 ct	16,000 x 0.1 ct	31,000 x 0.1 ct	75,000 x 1 g
Pound	0.48 x 0.00001 lb	1.3 x 0.00001 lb	7 x 0.0001 lb	13 x 0.0001 lb	33 x 0.001 lb
Ounce	7.7 x 0.0001 oz	21 x 0.0001 oz	110 x 0.001 oz	210 x 0.001 oz	520 x 0.01 oz
Troy Ounce	7 x 0.0001 ozt	19 x 0.0001 ozt	100 x 0.001 ozt	190 x 0.001 ozt	480 x 0.01 ozt
₩ Grain	3,300 x 0.1 GN	9,500 x 0.1 GN	49,000 x 1 GN	95,000 x 1 GN	230,000 x 10 GN
Pennyweight	140 x 0.001 dwt	390 x 0.001 dwt	2,000 x 0.01 dwt	3,900 x 0.01 dwt	9,600 x 0.1 dwt
Momme	58 x 0.001 mom	160 x 0.001 mom	850 x 0.01 mom	1,600 x 0.01 mom	4,000 x 0.1 mom
MSG	47 x 0.001 MSG	130 x 0.001 MSG	690 x 0.01 MSG	1,300 x 0.01 MSG	3,200 x 0.1 MSG
Tael (Hong Kong)	5.8 x 0.0001 TL	16 x 0.0001 TL	85 x 0.001 TL	160 x 0.001 TL	400 x 0.01 TL
Tael (Singapore)	5.8 x 0.0001 TL	16 x 0.0001 TL	84 x 0.001 TL	160 x 0.001 TL	390 x 0.01 TL
Tael (Taiwan)	5.8 x 0.0001 TL	16 x 0.0001 TL	85 x 0.001 TL	160 x 0.001 TL	400 x 0.01 TL
Tola	18 x 0.0001 to	53 x 0.0001 to	270 x 0.001 to	530 x 0.001 to	1,200 x 0.01 to
Bat	14 x 0.0001 Bat	40 x 0.0001 Bat	210 x 0.001 Bat	400 x 0.001 Bat	980 x 0.01 Bat
Milligrams	220,000 x 1 mg	620,000 x 1 mg	3,200,000 x 10 mg	6,200,000 x 10 mg	15,000,000 x 100 mg



TUNING FORK ENHANCED BALANCE

MODEL	CAPACITY	PART#
TE-223	220 g x 0.001 g	187600
TE-623	620 g x 0.001 g	186030
TE-3202	3,200g x 0.01g	186035
TE-6202	6,200 g x 0.01 g	186036
TE-15001	15,000g x 0.1g	186037

OPTIONS

DESCRIPTION	PART#
Power supply 100-240 VAC, 50-60 Hz	186074
In-use dust cover 623 g models and lower	186075
In-use dust cover 3,200 g models and higher	186076
Specific Density Measurement Kit	186077
Ethernet TCP/IP option card	186079

APPROVALS



CALIBRATION WEIGHTS

Medical scale calibration requires certified weights that can be traced to the National Institute of Standards and Technology (NIST). This will ensure your scale is calibrated properly and ready for the requirements of weighing in medical settings. Consumer weights such as barbells or similar items may not provide an accurate weight to calibrate your scale. For example, a 5-pound consumer weight, such as a barbell, may actually weigh between 4.75 and 5.25 pounds. Calibration weights with traceability to NIST have a manufactured and adjusted tolerance of +/-230 milligrams. Using a NIST-traceable calibration weight will ensure your scale is calibrated correctly and presents accurate weighments for proper patient care.

FEATURES

- Cast iron
- Grip handle
- ASTM Class 5

- Imperial or metric
- Made in the U.S.A.

OPTIONS

- Certificate of Calibration
- Stamped serial number





CALIBRATION WEIGHTS

PART NUMBER	DESCRIPTION	
IMPERIAL WEIGHTS		
12833	25 LB ASTM CLASS 5	
12839	50 LB ASTM CLASS 5	
METRIC WEIGHTS		
12767	10 KG ASTM CLASS 5	
12771	20 KG ASTM CLASS 5	
12775	25 KG ASTM CLASS 5	



An ISO 9001 Registered Company ©2020 Rice Lake Weighing Systems 01/20 Specifications subject to change without notice. Visit ricelake.com

ADDITIONAL RICE LAKE PRODUCTS FOR YOUR FACILITY



Rice Lake is dedicated to providing weighing solutions that are useful for every part of your facility, including nutrition services, housekeeping and waste management as well as the pharmacy and lab. Read below for information about equipment that may be used to support facility operations.

BENCH SCALES

For mobility and convenience, bench scales offer ideal features that are adaptable to a wide range of needs in a healthcare facility. Rice Lake can provide a bench scale in almost any capacity or requirement



FLOOR SCALES

Available in a vast number of capacities, sizes and mounting profiles, Rice Lake's RoughDeck* floor scales are ideal for weighing bulk items such as laundry, facility waste, equipment and shipments.



RETAIL SCALES

Used in food services, Rice Lake specializes in point of sales (POS) retail scales for accurate food portioning. These versatile weighing solutions feature portability, ease-of-use and precision for food service staff.

For information on Rice Lake's comprehensive line of weighing solutions and extensive in-stock product inventory, visit www.ricelake.com or call one of our helpful representatives at 800-472-6703.



Rice Lake's Global Family

A tradition of quality and customer service extended around the world





CORPORATE OFFICE

230 W. Coleman Street, Rice Lake, WI 54868 • USA USA: 800-472-6703 Canada/Mexico: 800-321-6703 Direct: 715-234-9171 Fax: 715-234-6967

EXTENDED BUSINESS HOURS

Monday through Friday from 6:30 a.m. to 6:30 p.m. Saturday from 8:00 a.m. to 12:00 p.m. Central Time

EMERGENCY CONTACT INFORMATION

Your service doesn't stop when the office is closed and neither does ours. Simply call 800-472-6703 and press 1 to reach on-call personnel outside of our normal business hours.

An ISO 9001 registered company © 2020 Rice Lake Weighing Systems PN 190049 1/20 Specifications subject to change without notice

www.ricelake.com