

ADDITIONAL WASHERS AND GASKETS



THIN BRASS WASHERS

For Gauge Glass Packing Nuts

Inside Diameter: 5/8" or 3/4"

Outside Diameter: 7/8", 15/16", 1-1/8", 1-3/16", 1-1/4"


GRAPHITE WASHERS

For Steam and Water Service

Washer No.	Dimensions in Inches		
	A Inside Diameter	B Outside Diameter	C Thickness or Height
WR - 99 - 001 - G	9/16	13/16	1/2
WR - 99 - 002 - G	39/64	13/16	3/8
WR - 99 - 003 - G	5/8	3/4	3/8
WR - 99 - 004 - G	39/64	7/8	3/8
WR - 99 - 005 - G	5/8	7/8	1/2
WR - 99 - 006 - G	5/8	15/16	3/8
WR - 99 - 007 - G	5/8	1-1/8	3/8
WR - 99 - 033 - G	47/64	15/16	3/8
WR - 99 - 009 - G	23/32	1-1/4	1/2
WR - 99 - 010 - G	3/4	1	3/8
WR - 99 - 011 - G	3/4	1	1/2
WR - 99 - 012 - G	3/4	1-1/16	1/2
WR - 99 - 013 - G	3/4	1-1/8	1/2
WR - 99 - 014 - G	3/4	1-3/16	1/2
WR - 99 - 015 - G	3/4	1-3/16	5/8
WR - 99 - 016 - G	3/4	1-1/4	3/8
WR - 99 - 017 - G	47/64	1-1/4	1/2
WR - 99 - 018 - G	3/4	1-1/4	3/4
WR - 99 - 019A - G	47/64	1-5/16	5/8



MODEL EFI 99




SPECIFY:
A. Inside Diameter
B. Outside Diameter
C. Thickness or Height

NOTE: Consult Ernst Flow Industries for special sizes.

HANDHOLE GASKETS

Standard Thickness: 1/4"

*Materials: Non-asbestos, SPIRAL WOUND, TOPOG-E®

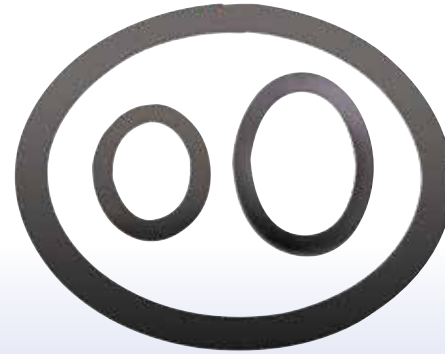

Contact Factory for Manhole Gasket Dimensions

Dimensions shown represent:

- Inside Oval Width
- Inside Oval Length
- Gasket Width

***NOTE: Consult Ernst Flow Industries on size availability of each material**

HANDHOLE GASKETS Dimensions in Inches

- 2 x 3 x 1/2
- 2-1/2 x 3 x 1/2
- 2-1/2 x 3 x 5/8
- 2-1/2 x 3-1/2 x 1/2
- 2-1/2 x 3-1/2 x 5/8
- 2-1/2 x 4 x 1/2
- 3 x 3-1/2 x 5/8
- 3 x 4 x 1/2
- 3 x 4 x 5/8
- 3 x 4 x 3/4
- 3 x 4-1/2 x 1/2
- 3 x 5 x 5/8
- 3-1/2 x 4 x 1/2
- 3-1/2 x 4 x 5/8
- 3-1/2 x 4-1/2 x 1/2
- 3-1/2 x 4-1/2 x 5/8
- 3-1/2 x 4-1/2 x 3/4
- 3-1/2 x 5 x 5/8
- 3-1/2 x 5-1/2 x 5/8
- 4 x 5 x 5/8
- 4 x 5 x 3/4
- 4 x 5-1/2 x 5/8
- 4 x 6 x 3/4
- 4-1/2 x 6-1/2 x 3/4

CONE SHAPE WASHERS

EPDM

For Steam and Water Service

MODEL EFI 33CS



Washer No.	Dimensions in Inches						
	Size of Glass	Overall Height	Inside Diameter	Outside Diameter	O.D. at Base of Bevel	Height of Bevel	Thickness of Flange
WR - 33CS - 121 - E	1/2	1/2	1/2	1-1/8	13/16	3/8	1/8
WR - 33CS - 122 - E	1/2	1/2	1/2	1-1/4	13/16	3/8	3/8
WR - 33CS - 123 - E	1/2	7/16	7/16	13/16	1/2	9/32	5/32
WR - 33CS - 124 - E	1/2	7/8	5/8	1	5/8	11/16	3/16
WR - 33CS - 125 - E	1/2	5/8	1/2	15/16	9/16	7/16	3/16
WR - 33CS - 341 - E	3/4	3/4	3/4	1-5/16	1-3/32	17/32	7/32
WR - 33CS - 342 - E	3/4	5/8	3/4	1-17/32	1-1/16	7/16	1/4
WR - 33CS - 343 - E	3/4	15/16	3/4	1-5/8	1-1/4	11/16	3/16
WR - 33CS - 343L - E	3/4	15/16	3/4	1-9/16	1-1/4	3/4	7/16
WR - 33CS - 344 - E	3/4	13/16	3/4	1-9/32	1-1/16	3/8	1/4
WR - 33CS - 345 - E	3/4	1	3/4	1-1/4	31/32	3/4	1/8
WR - 33CS - 346 - E	3/4	1/2	17/32	1-3/16	15/16	19/32	5/32
WR - 33CS - L347 - E	3/4	5/8	21/32	1-7/32	31/32	15/32	5/32
WR - 33CS - 348 - E	3/4	7/8	3/4	1-11/32	1	5/8	1/4
WR - 33CS - 349 - E	3/4	21/32	21/32	1-3/16	23/32	1/2	5/32
WR - 33CS - 353 - E	3/4	1-3/8	3/4	1-1/2	13/16	7/8	1/2
WR - 33CS - L568 - E	17/32	5/8	7/32	1-1/16	13/16	15/32	5/32
WR - 33CS - 581 - E	5/8	9/16	5/8	1-1/4	7/8	7/16	7/32
WR - 33CS - 584 - E	5/8	3/4	5/8	1-3/8	15/16	5/16	7/16

PTFE WASHERS


Ideal For Use Against Acids, Solvents and Alkalies

Can be furnished to fit all type Packing Nuts and Glass on Liquid Level Gauges

All sizes made to order



MODEL EFI 101



SPECIFY:
A. Inside Diameter
B. Outside Diameter
C. Thickness or Height

SPECIAL FLAT GASKETS

Made in any Inside or Outside Diameter.

Thickness: 1/32", 1/16" or 1/8"

- | | |
|--------------|---------------|
| FIBER | CORK |
| GRAPHITE | NEOPRENE |
| FKM (Viton™) | GYLON® |
| PTFE | PTFE ENVELOPE |

When ordering specify Inside Diameter, Outside Diameter and Thickness

