

## EME3625DFL WIND-DRIVEN RAIN RESISTANT STATIONARY LOUVER EXTRUDED ALUMINUM (2017 FLORIDA BUILDING CODE 222334.1)

### STANDARD CONSTRUCTION

#### FRAME

3" (76) deep, 6063T6 extruded aluminum with .062" (1.6) nominal wall thickness.

#### BLADES

6063T6 extruded aluminum .040" (1) nominal wall thickness. Blades are mounted vertically and spaced approximately  $\frac{3}{4}$ " (19) center to center.

#### SCREEN

5/8" x .040 (16 x 1.0) expanded, flattened aluminum screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.

#### EXTENDED SILL

.080" (2.1) formed aluminum with end dams.

#### FINISH

Mill.

#### MINIMUM SIZE

12"w x 12"h (305 x 305).

#### APPROXIMATE SHIPPING WEIGHT

5 lbs. per sq. ft. (24 kg/m<sup>2</sup>)

#### MAXIMUM SINGLE SECTION SIZE

Shall be 48" x 96" (1219 x 2438). Lifting lugs provided on louvers 48" x 72" (1219 x 1829) and larger.

Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

### FEATURES



- AMCA 550 and AMCA 540 Listed Louver
- 45% Free Area.
- Closely spaced vertical blades prevent the penetration of wind-driven rain, reducing damage and additional operating expenses.
- Published performance ratings based on testing in accordance with AMCA Publication 500L.
- Excellent pressure drop performance.
- Aluminum construction for low maintenance and high resistance to corrosion.
- All welded construction.
- Visible mullion construction. Hidden mullions and continuous blade construction are not available.
- 2017 FBC#22334.1

### OPTIONS

- Filter racks.
- A variety of bird and insect screens.
- Selection of finishes: prime coat, 50% PVDF (modified fluoropolymer), epoxy, Pearle dize 50 & 70, 70% PVDF, clear and color anodize. (Some variation in anodize color consistency is possible).

All variations are available at additional cost.

Consult Ruskin for other special requirements.

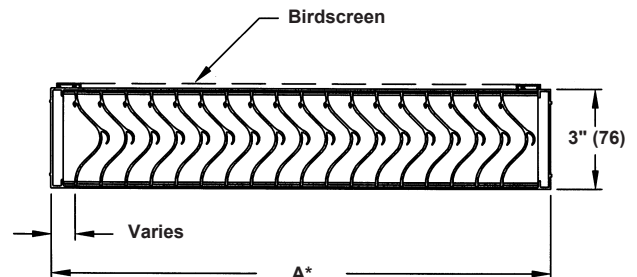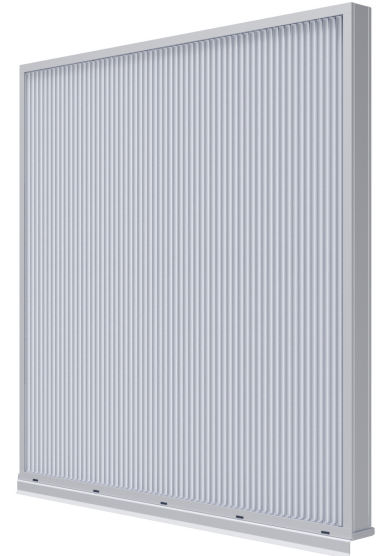

HIGH VELOCITY  
RAIN RESISTANT  
AND IMPACT RESISTANT  
LOUVER  
*Basic Protection*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify AMCA airflow performance certification.

Ruskin certifies that the EME3625DFL shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program.

The AMCA Listing Label applies to High Velocity Rain Resistant Louver Louvers.

The AMCA Listing Label applies to Wind Borne Debris Impact Resistant Louvers.

# WIND-DRIVEN RAIN PERFORMANCE

Test size is: 39" x 39" (.99 x .99) core area, 41" x 41" (1.04 x 1.04) nominal. Free Area of test louver is 5.18 ft.<sup>2</sup> (.48m<sup>2</sup>).

| Wind Velocity mph (kph) | Rainfall rate in./hr. (mm/hr.) | Core Velocity FPM (m/s <sup>1</sup> ) | Airflow cfm (m <sup>3</sup> /min) | Free area velocity <sub>2</sub> fpm (m/s) | Effectiveness Ratio | Class <sub>3, 4</sub> | Discharge Loss Class <sub>5</sub> Intake |
|-------------------------|--------------------------------|---------------------------------------|-----------------------------------|---|---------------------|-----------------------|--|
| 29 (46.4)               | 3 (76)                         | 967 (5)                               | 10,412 (294)                      | 2,010 (10.0)                              | 100%                | A                     | 1  |
| 50 (80.5)               | 8 (203)                        | 974 (5)                               | 10,484 (296)                      | 2,024 (10.1)                              | 100%                | A                     | 1  |

**NOTES**

- Core area is the open area of the louver face (face area less louver frames). Core Velocity is the airflow velocity through the Core Area of the louver. 5 m/s is the maximum core velocity utilized in this test.
- Free Area of test size is calculated per AMCA standard 500-L.
- Wind-Driven Rain Penetration Classes:
 

| Class | Effectiveness |
|-------|---------------|
| A     | 1 to .99      |
| B     | 0.989 to .095 |
| C     | 0.949 to 0.80 |
| D     | Below 0.8     |

- The EME3625DFL provides class A performance at all velocities up to and including 5 m/s core velocity.
- Discharge Loss Coefficient is calculated by dividing a louvers actual airflow rate vs. a theoretical airflow for the opening. It provides an indication of the louvers' airflow characteristics.

Discharge Loss Classes:

| Class | Discharge Loss Coefficient |
|-------|----------------------------|
| 1     | 0.4 and above              |
| 2     | 0.3 to 0.399               |
| 3     | 0.2 to 0.299               |
| 4     | 0.199 and below            |

(The higher the coefficient, the less resistance to airflow.)



Ruskin Company certifies that EME3625DFL louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and wind driven rain ratings only.

## FREE AREA GUIDE


Free Area Guide shows free area in ft<sup>2</sup> and m<sup>2</sup> for various sizes of EME3625DFL.

Width – Inches and Meters

|           | Width – Inches and Meters |             |             |             |              |              |              |
|-----------|---------------------------|-------------|-------------|-------------|--------------|--------------|--------------|
|           | 12                        | 18          | 24          | 30          | 36           | 42           | 48           |
|           | 0.30                      | 0.46        | 0.61        | 0.76        | 0.91         | 1.07         | 1.22         |
| <b>12</b> | <b>0.22</b>               | <b>0.37</b> | <b>0.52</b> | <b>0.66</b> | <b>0.81</b>  | <b>0.96</b>  | <b>1.11</b>  |
| 0.30      | 0.02                      | 0.03        | 0.05        | 0.06        | 0.08         | 0.09         | 0.10         |
| <b>18</b> | <b>0.43</b>               | <b>0.71</b> | <b>1.00</b> | <b>1.28</b> | <b>1.57</b>  | <b>1.85</b>  | <b>2.14</b>  |
| 0.46      | 0.04                      | 0.07        | 0.09        | 0.12        | 0.15         | 0.17         | 0.20         |
| <b>24</b> | <b>0.63</b>               | <b>1.06</b> | <b>1.48</b> | <b>1.90</b> | <b>2.32</b>  | <b>2.75</b>  | <b>3.17</b>  |
| 0.61      | 0.06                      | 0.10        | 0.14        | 0.18        | 0.22         | 0.26         | 0.29         |
| <b>30</b> | <b>0.84</b>               | <b>1.40</b> | <b>1.96</b> | <b>2.52</b> | <b>3.08</b>  | <b>3.64</b>  | <b>4.20</b>  |
| 0.76      | 0.08                      | 0.13        | 0.18        | 0.23        | 0.29         | 0.34         | 0.39         |
| <b>36</b> | <b>1.05</b>               | <b>1.74</b> | <b>2.44</b> | <b>3.14</b> | <b>3.84</b>  | <b>4.53</b>  | <b>5.23</b>  |
| 0.91      | 0.10                      | 0.16        | 0.23        | 0.29        | 0.36         | 0.42         | 0.49         |
| <b>42</b> | <b>1.25</b>               | <b>2.09</b> | <b>2.92</b> | <b>3.76</b> | <b>4.59</b>  | <b>5.43</b>  | <b>6.26</b>  |
| 1.07      | 0.12                      | 0.19        | 0.27        | 0.35        | 0.43         | 0.50         | 0.58         |
| <b>48</b> | <b>1.46</b>               | <b>2.43</b> | <b>3.40</b> | <b>4.38</b> | <b>5.35</b>  | <b>6.32</b>  | <b>7.29</b>  |
| 1.22      | 0.14                      | 0.23        | 0.32        | 0.41        | 0.50         | 0.59         | 0.68         |
| <b>54</b> | <b>1.66</b>               | <b>2.77</b> | <b>3.88</b> | <b>4.99</b> | <b>6.10</b>  | <b>7.21</b>  | <b>8.32</b>  |
| 1.37      | 0.15                      | 0.26        | 0.36        | 0.46        | 0.57         | 0.67         | 0.77         |
| <b>60</b> | <b>1.87</b>               | <b>3.12</b> | <b>4.37</b> | <b>5.61</b> | <b>6.86</b>  | <b>8.11</b>  | <b>9.35</b>  |
| 1.52      | 0.17                      | 0.29        | 0.41        | 0.52        | 0.64         | 0.75         | 0.87         |
| <b>66</b> | <b>2.08</b>               | <b>3.46</b> | <b>4.85</b> | <b>6.23</b> | <b>7.62</b>  | <b>9.00</b>  | <b>10.39</b> |
| 1.68      | 0.19                      | 0.32        | 0.45        | 0.58        | 0.71         | 0.84         | 0.97         |
| <b>72</b> | <b>2.28</b>               | <b>3.81</b> | <b>5.33</b> | <b>6.85</b> | <b>8.37</b>  | <b>9.89</b>  | <b>11.42</b> |
| 1.83      | 0.21                      | 0.35        | 0.50        | 0.64        | 0.78         | 0.92         | 1.06         |
| <b>78</b> | <b>2.49</b>               | <b>4.15</b> | <b>5.81</b> | <b>7.47</b> | <b>9.13</b>  | <b>10.79</b> | <b>12.45</b> |
| 1.98      | 0.23                      | 0.39        | 0.54        | 0.69        | 0.85         | 1.00         | 1.16         |
| <b>84</b> | <b>2.70</b>               | <b>4.49</b> | <b>6.29</b> | <b>8.09</b> | <b>9.88</b>  | <b>11.68</b> | <b>13.48</b> |
| 2.13      | 0.25                      | 0.42        | 0.58        | 0.75        | 0.92         | 1.09         | 1.25         |
| <b>90</b> | <b>2.90</b>               | <b>4.84</b> | <b>6.77</b> | <b>8.71</b> | <b>10.64</b> | <b>12.57</b> | <b>14.51</b> |
| 2.29      | 0.27                      | 0.45        | 0.63        | 0.81        | 0.99         | 1.17         | 1.35         |
| <b>96</b> | <b>3.11</b>               | <b>5.18</b> | <b>7.25</b> | <b>9.32</b> | <b>11.40</b> | <b>13.47</b> | <b>15.54</b> |
| 2.44      | 0.289                     | 0.482       | 0.67        | 0.87        | 1.06         | 1.25         | 1.45         |


Height – Inches and Meters

## PRESSURE DROP

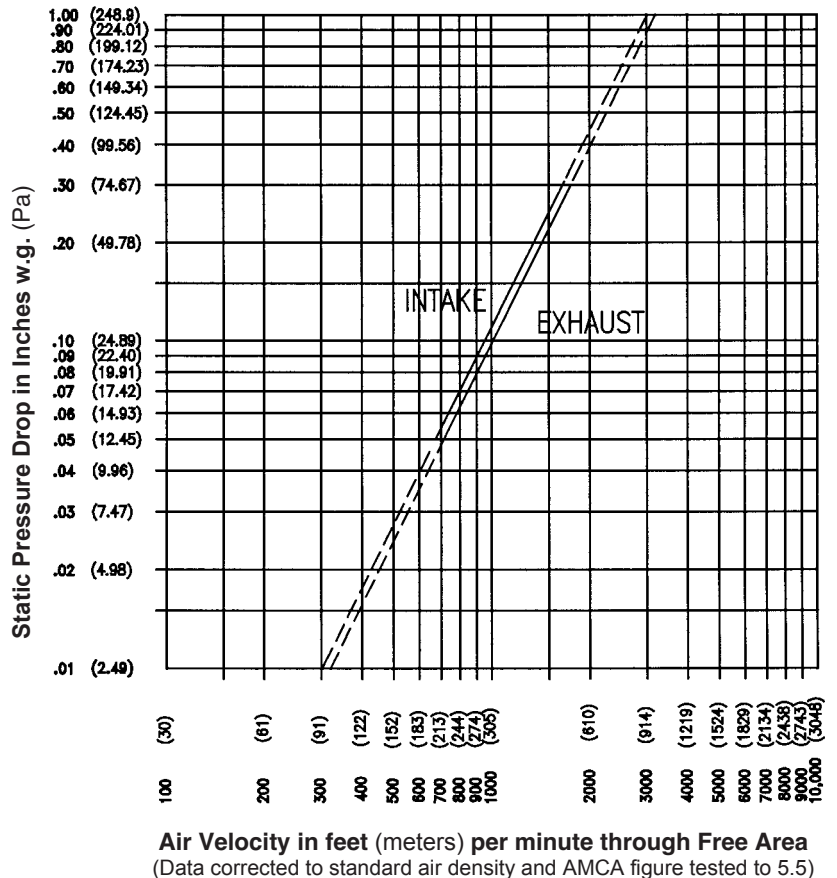

## TYPICAL INSTALLATION DETAILS

### STANDARD FRAME

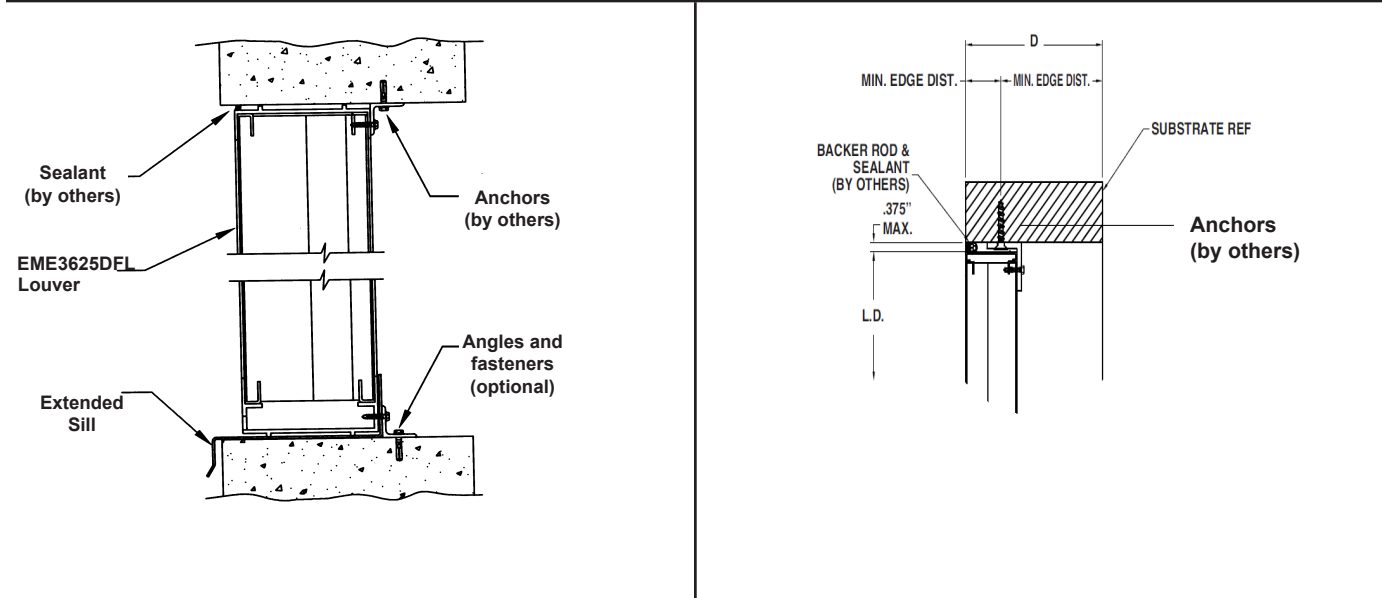

Options available at additional cost.

### SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall possess stationary vertical blades designed to prevent the penetration of wind-driven rain. Louver blades shall be contained within a 3" (76) frame. Louver components (heads, jambs, sill and blades) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall limit single section sizes to 48" x 96" (1219 x 2438) and shall withstand a wind load of 50 lbs. per sq. ft. (2.39 kPa) - specifier may substitute any loading required).

Louvers shall be Ruskin Model EME3625DFL extruded 6063T6 aluminum alloy construction as follows:

- Frame: .062" (1.6) wall thickness, caulking surfaces provided.
- Blades: .040" (1) wall thickness, installed vertically on approximately .75" (19) centers.
- Screen: .050" x .063" (13 x 1.6) square mesh aluminum bird screen in removable frame.
- Finish: Select finish specification from Ruskin Finishes Brochure.

# RUSKIN®

3900 Dr. Greaves Rd.  
Kansas City, MO 64030  
(816) 761-7476  
FAX (816) 765-8955  
www.ruskin.com