


Cast Iron Air Purger

Features:

- Available in heavy cast iron construction in sizes from 1" to 3"
- Taps are provided for expansion tank and air vent connection
- Maximum working pressure of 125 psig
- Maximum operating temperature of 275°F

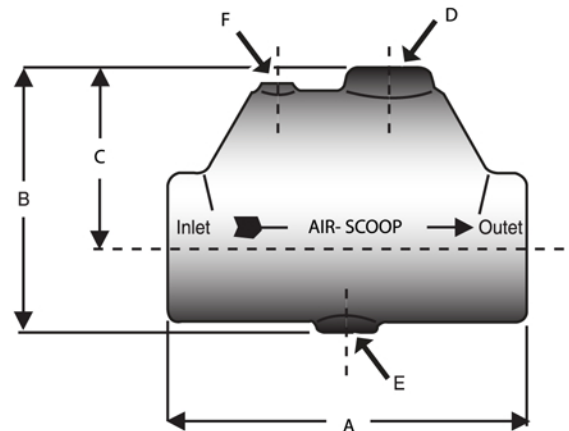

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation.

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

| MODEL | SIZE | A (in.) | B (in.) | C (in.) | D (in.) | E (in.) | F (in.) | WEIGHT (lbs.) |
|---------|--------|---------|---------|---------|------------|----------|----------|---------------|
| AS0010T | 1" | 6" | 4" | 2 1/2" | * | 1/2" NPT | 1/8" NPT | 4 |
| AS0125T | 1 1/4" | 6" | 4" | 2 1/2" | * | 1/2" NPT | 1/8" NPT | 4 |
| AS0150T | 1 1/2" | 8" | 6" | 4" | 3/4" NPT | 1/2" NPT | 1/8" NPT | 7 |
| AS0200T | 2" | 8" | 6" | 4" | 1" NPT | 1/2" NPT | 1/8" NPT | 7 |
| AS0250T | 2 1/2" | 10" | 8" | 5" 1/2" | 1" NPT | 1/2" NPT | 1/8" NPT | 15 |
| AS0300T | 3" | 10" | 8" | 5 1/2" | 1 1/4" NPT | 1/2" NPT | 1/8" NPT | 14 |

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

| ITEMS | QUANTITY |
|-------|----------|
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |
| _____ | _____ |

American WHEATLEY
HVAC PRODUCTS®
A GFP COMPANY

2701 W. Concord Street
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com