

# WFA Large Series ASME Multi-Purpose Expansion Tank

## Full Acceptance

### Features:


- Constructed in accordance with ASME Section VIII, Division I, Latest Edition
- Fully removable and replaceable heavy-duty Butyl rubber bladder
- NSF Approved Bladder
- Fully Adjustable Field Air Charging
- Factory Air Charged to 12 P.S.I.
- Primed Exterior

### Optional Features:

- Higher working pressures available
- Trimmed for Potable Water
- "Bulls Eye" sight glass
- Seismic mounting (clips or legs)
- EPDM Bladder Material
- Higher pressures available upon request  
Tank dimensions will not change
- Painted Exterior, Epoxy Coatings

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation.

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

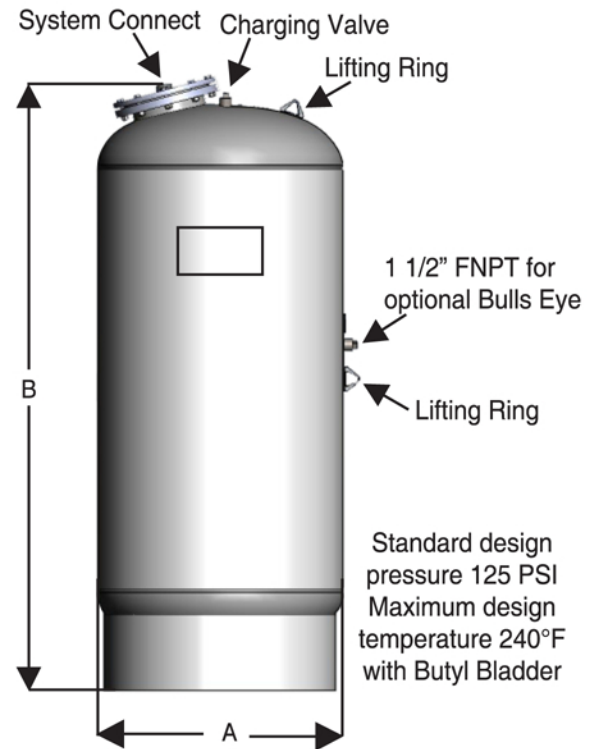

PART NUMBER	ACCEPTANCE VOLUME	DIAMETER A (IN.)	HEIGHT B (IN.)	SYSTEM CONNECT (IN.)	WEIGHT	WORKING PRESSURE
WFA-1000	271	36	79 1/2	1 1/2	790	125 PSI
WFA-1200	324	36	92	1 1/2	940	125 PSI
WFA-1400	377	36	102 1/2	1 1/2	1020	125 PSI
WFA-1600	422	48	76 1/2	1 1/2	1380	125 PSI
WFA-2000	528	48	88 1/2	1 1/2	1650	125 PSI
WFA-2500	660	48	101	2	1435	125 PSI
WFA-3000L	792	48	120 1/2	2	1550	125 PSI
WFA-3000S	792	60	80	2	2169	125 PSI
WFA-4000	1056	60	100 1/2	2	2638	125 PSI
WFA-5000	1320	60	124	2	3246	125 PSI
WFA-7500	1980	72	130	3	4005	125 PSI
WFA-10000	2640	72	167	3	4845	125 PSI
WFA-15000	3963	72	244	3	5925	125 PSI

JOB NAME \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 CONTRACTOR P.O. NO. \_\_\_\_\_

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

**American WHEATLEY**  
HVAC PRODUCTS®  
A GFP COMPANY

2701 W. Concord Street  
Broken Arrow, OK 74012  
Toll Free: 866-204-5229  
PH: 918-317-0401  
FAX: 918-317-0407  
www.wheatleyhvac.com  
e-mail: sales@globalflowproducts.com

**USE:**

Designed to absorb expansion of fluids in typical hydronic systems. The WFA Tank is designed for pressure boost systems as well as typical cooling and heating applications. Bladder material is suitable for hot water applications. Installation of the tank will help eliminate constant pump use, prolonging pump life and unnecessary blowing of relief valves.

**Specifications:**

Furnish and install and shown on plans, American Wheatley WFA series, full acceptance expansion tank. Tank shall be constructed of carbon steel in accordance with ASME Section VIII, Division 1, latest edition. Tank shall incorporate a removable and replaceable heavy duty butyl bladder. Tank shall be supplied with 12 psi factory air charge. Tanks shall be supplied on standard base ring unless otherwise specified. Tanks shall be constructed and ASME stamped for 125 psi working pressure at 240°F. Tanks shall be supplied with exterior high grade red oxide primer finish. Vertical or horizontal installation is acceptable. Non-replaceable diaphragm type tanks are not acceptable.

**Typical Piping Details**

With Bladder Type Tanks (WFA/WPA Series)

