

Data Aire

LCSTM (Large Ceiling System)
6, 8, 10, and 13 ton

R-407C



DA
DATA AIRE INC.

ISO 9001 Certified



LCS™
(LARGE CEILING SYSTEMS)

with **R-407C** refrigerant

Product Description

Performance and Electrical Data



... the pioneer and builder of the
most complete line of
precision cooling equipment

Data Aire's first precision cooling system was developed by data processing engineers who sought optimum environmental conditions for early computers. It was clear that "people comfort" air conditioning systems were unable to meet the environmental requirements of computers and data processing equipment. Precision environmental control equipment with high sensible cooling ratios was a necessity. Problems with paper sticking, head crash, and static electricity were eliminated. Humidity fluctuation were controlled saving possible electrical and mechanical failures and more importantly – Downtime. Data Aire's innovative response to the challenge of eliminating problems within the computer room environment was the start of wide use precision cooling.

As in the past, Data Aire is meeting today's challenge of not only the computer room but also the ever expanding telecommunications industry where precision cooling is vital to our everyday communications. Telecommunication equipment requires a controlled environment with clean and properly distributed air. As in the computer room, the environment must be precisely controlled – 24 hour a day, 365 days a year.

Data Aire produces solutions. We have offered environmental control solutions to meet specific needs in the smallest of places and in areas of thousands of square feet. We are prepared to assist you, your in-house engineering department, consulting engineer, or construction department in defining the proper solutions and bringing them to a predefined outcome.

Data Aire is committed to being the supplier of choice for environmental process cooling with flexibility, reliability, and expertise required to meet our customer's needs. To be successful, it is essential to be creative and use our resources to their fullest capabilities. The Data Aire goal is to benefit the employees, partners, and most of all – our customers with honesty and integrity.

Data Aire Delivers!

PRECISION COOLING

LCS is a precision environmental control systems that bring a standard of reliable performance required by today's market demands; Small and medium size data centers, telecommunication sites, or where floor space is not available and larger tonnage units are required. Designed for ducted above ceiling applications, the LCS may be ordered as an air or water/glycol cooled direct expansion unit with single or dual compressors. Chilled water units are also available. Each LCS unit is factory run tested and put through a rigorous quality control procedure.

COMFORT

Computer rooms, telecommunication sites, and other environmentally controlled spaces require air which is clean and properly distributed, with precisely controlled temperature and humidity. Building or "people comfort" systems are not designed to meet these demands. LCS is designed to meet these goals.

CONTROL

The heart of the LCS is the *Mini dapTM4*, a microprocessor based controller designed for precision environmental control. The *Mini dap4* not only controls and monitors temperature, humidity, airflow, and cleanliness, it provides alarm history and automatic self-tests. All information is provided on a liquid crystal display (LCD).

DATA AIRE DELIVERS

Engineered for high performance and reliability, each LCS comes with Data Aire's commitment to excellence. This commitment began with Data Aire's first process cooling unit and has continued for more than 30 years of building the industry's finest precision control equipment. Standard ship cycle is 30 days from date of order. With Data Aire's optional "quick ship" program, units can be expedited to ship in as little as one week. All units are built to your specific order. Call your nearest Data Aire representative for more information.

TABLE OF CONTENTS

Design Features.....	6
Control System	8
Options.....	10
Model Identification.....	11
Performance Data	
Air Cooled.....	12
Water/Glycol Cooled	36
Chilled water.....	52
Dimensional and Weight data.....	58



CABINET

The heliarc welded tubular steel frame provides maximum strength and ease of service access. Removable panels of galvanized steel are insulated with 1 inch thick, 1-1/2 pound density insulation for thermal protection and sound attenuation. All parts are easily accessible. The electrical panel is hinged and swings out for servicing.

COIL SECTION

Designed for draw through application, the computer selected coil offers greater efficiency in the cooling and dehumidification process. Air bypass is provided to prevent saturated air from being introduced into the controlled space. The coil section is provided with a stainless steel drain pan.

FAN SECTION

The centrifugal, forward curved, double width, double inlet blower configuration is engineered for quiet reliable operation. The belt driven variable pitch drive section provides adjustable air flow capability to match load requirements of the controlled space. The draw through design insures even air distribution across the coil and bypass, low internal cabinet losses, and static sealing of the filter section. Motors are mounted on an adjustable slide base and have internal overload protection.

FILTER SECTION

Units are provided with 4 inch deep pleated design, MERV 8. The filter section is an integral part of the system and is accessible from either side.

REHEAT

Two stage electric reheat is standard. Low-watt density finned tubular sheathed coils are constructed of stainless steel and sized to maintain room dry bulb conditions during a call for dehumidification. Low-watt density coils eliminate ionization associated with open air electric resistance heating.

REFRIGERATION CIRCUIT

LCS is available with either a single or dual refrigeration circuit. The refrigeration circuit includes a hermetic scroll compressor. These durable, heavy duty, fully welded compressors have no gaskets or seals, eliminating the possibility of refrigerant or oil leaking into the controlled space or environment. Scroll compressors also bring a combination of reliability, efficiency, and improved system sound performance. The refrigeration circuit includes built-in compressor overload protection, crankcase heater, filter drier, sight-glass, adjustable expansion valve with external equalizer, low pressure override timer (air cooled units), manual reset high pressure control, and compressor short cycle timer.

Water/glycol cooled units include a plate fin condenser sized to provide the required capacity for heat rejection with minimum water/glycol flow and low total pressure drop. Head pressure regulating valves control the condensing temperature and maintain required capacity at various water/glycol flow rates and temperatures.

Air Cooled with Remote Outdoor Condenser - A wide range of outdoor condensers are available. Condensers are manufactured by Data Aire and sized to meet heat rejection and ambient conditions as required. The industrial duty design includes galvanized corrosion resistant housing, aluminum finned copper tube coils, coated fan guards, energy efficient thermally protected direct drive motors, and variable fan speed control on lead motor for proper control down to -20° F ambient temperatures. Additional fan motors are controlled with ambient thermostats.

Air Cooled with Outdoor Condensing Unit - When compressors are required to be out of the controlled space, LCS is available with a remote outdoor condensing unit. The condensing unit includes hermetic scroll compressor(s) with built-in overload protection, crankcase heater, filter drier, sight-glass, and condenser coil. The coil is constructed with copper tubes and aluminum fins. The housing is galvanized steel with vertical air discharge. The condenser fan motor is variable speed type for head pressure control down to -20° F ambient temperatures. Additional fan motors are controlled by ambient fan thermostats.

Water/Glycol Cooled with Remote Outdoor Dry Cooler - Remote outdoor dry coolers are available in a variety of sizes. Each dry cooler includes galvanized corrosion resistant housing, aluminum finned copper tube coil, coated fan guards, surge tank, pump contactor, and energy efficient thermally protected direct drive motors. Dry coolers with multiple motors have cycling control.

CHILLED WATER SYSTEMS

Chilled water systems include all the same features of the LCS product line. Designed for draw through application, the computer selected coil offers greater efficiency in the cooling and dehumidification process. Air bypass is provided to prevent saturated air from being introduced into the controlled space. Chilled water flow is controlled by a 3-way chilled water valve for accurate and economical temperature control and dehumidification.

SYSTEM CONTROL

Unit control is maintained with the microprocessor based *Mini dap™4*. The *Mini dap4* is an advanced controller with 50 MHz, 32 bit microprocessor and is comprised of three components, a wall mounted display module, a control module mounted inside the unit and a remote temperature and humidity sensor. The *Mini dap4* monitors the controlled environment's temperature, humidity, air flow, and cleanliness, but also provides alarm history and an automatic self-test of the microprocessor on system start-up. Multiple messages are displayed by automatically scrolling from each message to the next. All messages are presented in a clear vernacular format on the liquid crystal display (LCD). Multiple alarms are displayed sequentially in order of occurrence.

OPERATION - Holding down the "ESC" button for a minimum of five seconds activates the *Mini dap4*, push buttons allow menu selection for programming, operational information, diagnostics, and historical data. The two-level password feature prevents unauthorized access. Menu programmed information for basic system operation and alarm parameters is nonvolatile.

PROGRAMMABLE FUNCTIONS :

Temperature Setpoint	Temperature Deadband
System Start Delay	Low Temperature Alarm Limit
Humidity Deadband	Humidity Setpoint
High Humidity Alarm Limit	Low Humidity Alarm Limit
Define Password	Reset Equipment Runtimes
Audio Alarm Mode	Compressor Short Cycle Alarm
Humidity Anticipation	Compressors(s)
Calibrate Temperature Sensor	Temperature Scale
High Temperature Alarm Limit	Water Valve Voltage Range*
Firestat Temperature Alarm Limit	Manual Diagnosis
No water flow alarm action*	Remote Alarm contacts
Calibrate Discharge Air Sensor*	Person to contact on Alarm
Compressor Lead/Lag Sequence*	Dehumidification Mode
Power Problem or Restart Mode	Scheduled Normal Maintenance
Reheat mode	Calibrate Humidity
Humidifier	Compressor Assists to Energy Saver*
Network Protocol	Low Discharge Temperature Alarm Limit*
Calibrate Chilled Water Temperature Sensor*	

DISPLAYED CONDITIONS, DATA, and FUNCTIONS:

Temperature setpoints	Humidity setpoint
Current temperature	Current humidity
Cooling 1, 2 (as applicable)	Reheat
Humidification	Dehumidification

ALARMS - Alarm conditions are displayed and monitored on the microprocessor LCD along with an audible alarm. The alarm silence switch will quiet the audible alarm but the display will continue to indicate the alarm condition until it is corrected. The following alarms are displayed:

High temperature warning	High humidity warning
Low temperature warning	Low humidity warning
High pressure compressor	High condensate water level
Firestat tripped	No air flow
Compressor short cycle	Low voltage warning
Temperature sensor error	Power failure restart
Humidity sensor error	Local alarms
Maintenance required	Person to contact on alarm

* - Some of the programmable elections, displays or alarms may require additional components or sensors.

SYSTEM CONTROL, *continued*

HISTORICAL DATA:

High/low temperature last 24 hours	High/low humidity last 24 hours
Blower, compressor 1, compressor 2*, reheat, dehumidification, Energy Saver*,	
Equipment runtimes for:	
Humidifier, and chilled water *	Low temperature last 24 hours
Alarm history (last 100 alarms)	High humidity last 24 hours

Control Module



Temperature and Humidity Sensor



Display Module



Button Functions

	Allows viewing of active alarms Silences audible alarms Resets active alarms		Allows scrolling to next screen Allows values changes (increase)
	Allows entry to Main Menu		Allows entry to Menus Advances cursor
	Return to previous screen Hold five seconds to turn ON or OFF		Returns to previous screen Allows value changes (decrease)

Energy Saver Coil - An *Energy Saver Coil* can be provided integral to the unit matching the nominal capacity. *Energy Saver* cooling is available whenever the incoming water/glycol temperature is below the setpoint of the water sensing changeover thermostat. The water sensing changeover thermostat is factory set at 45° F/7.2° C. The water sensing changeover thermostat is field adjustable. The *Energy Saver* operates during a need for cooling. The *Energy Saver* valve will open at setpoint plus deadband. When the space temperature falls to setpoint, the valve will close and the space is considered satisfied. While in *Energy Saver* mode with the valve open, if the incoming water/glycol temperature rises 3° F above the setpoint (of the water sensing thermostat), the *Energy Saver* valve will close and DX (mechanical) cooling will begin. Option includes a 3-way pressure control valve on the condenser water circuit(s) and a 3-way valve for the economy coil. Common piping for the coil and condensers is provided.

Auxiliary Chilled Water Coil - Where an existing chilled water loop is available, units can be fitted with an auxiliary chilled water coil. Units will operate using the chilled water for cooling. Upon a loss of water flow or an increase in room temperature the system will bring on compressor (DX) cooling. The Auxiliary Chilled Water Coil option includes the next size motor. Separate piping is provided for the chilled water coil and refrigeration connections on air cooled units or water circuit(s) on water/glycol cooled units.

Unit Mounted Temperature and Humidity Sensors - Temperature and humidity sensors may be ordered for unit mounting in the return air.

Unit Mounted Disconnect - A unit mounted nonautomatic disconnect switch is installed in the high voltage electrical section. The operating mechanism prevents access to the high voltage electrical components until switched to the "OFF" position. The operating mechanism (handle) protrudes through the exterior unit panel.

Hot Water Reheat - Where hot water is available, a water coil for reheat is offered. The coil is designed for 150 psi maximum water pressure and includes a 2-way valve (a 3-way is also available). Units with the hot water reheat do not include electric reheat.

Hot Gas Reheat - The unit's hot gas discharge may be used for reheat for maximum system efficiency.

Steam Generator Humidifier - Units may be furnished with an electric steam generator humidifier with "quick change" disposable cylinders and auto-flush cycle. The steam generator humidifier with its patented control sys-

tem optimizes cylinder life by concentrating incoming water to a predetermined conductivity much higher than that of any entering water. The control system continuously monitors the conductivity in the cylinder through its electronics which allows water to be flushed as often as is necessary to maintain the level at this design conductivity. The high design conductivity results in a minimum flushing of heated water which saves energy. The humidifier is designed to allow all units at any voltage to produce full rated steam output at an optimum low water level. Available in 10 and 30 pound per hour capacities.

Hot Gas Bypass - A hot gas bypass valve is available for applications that create low suction pressure conditions that could lead to coil freeze and/or compressor cycling. In facilities such conditions generally exist in instances where; 1) a unit's dehumidification mode needs to run for an extended period of time; or 2) a room is designed for low entering air conditions; or 3) a unit is utilizing an oversized condenser at low outdoor ambient conditions.


3-Way Water Regulating Valve - A 3-way water regulating valve for pressure control may be ordered to replace standard 2-way valve installed in the unit. The 3-way valve controls the water/glycol flow rate to maintain the required capacity under varying conditions.

Condensate Pump - Condensate pumps available for field installation. Pumps should be mounted on the side of the unit. Option 210, side mounting kit, is available for easy mounting. Condensate pumps are complete with sump, motor, and automatic control. The pumps are rated for 130 GPM @ 20 foot maximum or 40 GPH @ 20 feet with check valve. Pumps shipped loose are available in 115, 230, or 460 volt.

Extended Compressor Warranty - An extended compressor warranty for a period of four (4) years is available in addition to the standard eighteen (18) month warranty, from date of shipment. The warranty is for replacement of compressors and does not include labor.

MODEL NUMBER IDENTIFICATION

LCS - (Large Ceiling System)

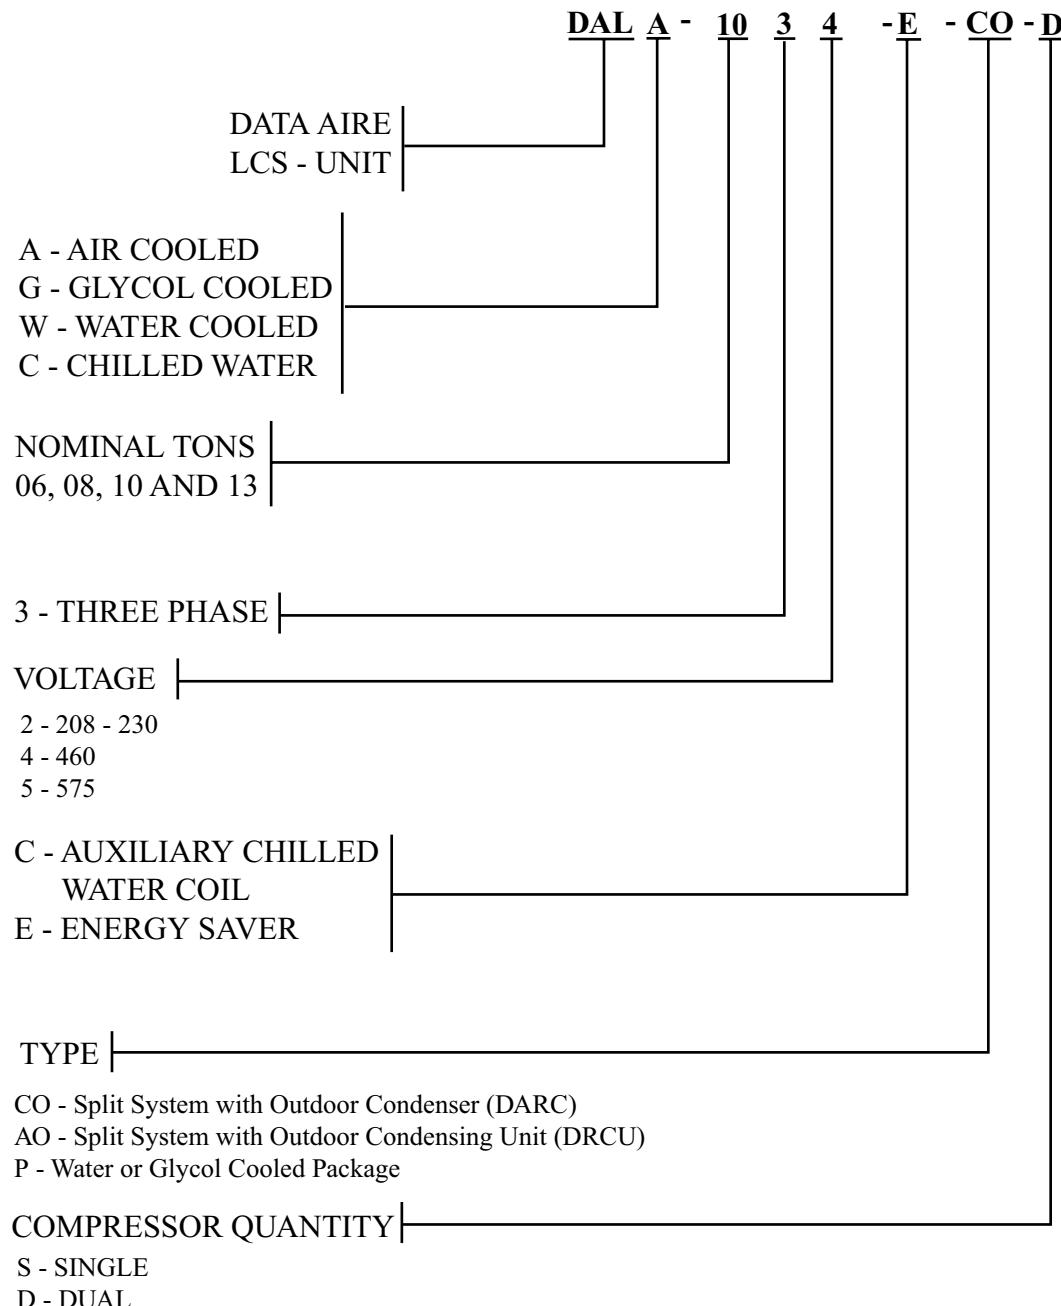

AIR COOLED: Performance data at STANDARD airflow - remote air cooled condenser - single compressor

MODEL NUMBER:	DALA-	06-CO-S	08-CO-S	10-CO-S	13-CO-S
----------------------	--------------	----------------	----------------	----------------	----------------

CAPACITY in Btu/hr - gross

80° DB/67° WB	Total	81,400	101,800	137,700	167,400
50% RH	Sensible	62,000	77,400	102,600	126,300
75° DB/62.5° WB	Total	75,500	94,100	128,000	155,400
50% RH	Sensible	60,000	74,700	99,500	122,400
75° DB/61° WB	Total	73,200	91,300	124,000	150,900
45% RH	Sensible	64,000	79,700	105,900	130,500
72° DB/60° WB	Total	71,900	89,500	122,200	148,200
50% RH	Sensible	58,800	73,100	97,700	120,000
72° DB/58.6°WB	Total	69,900	87,000	118,700	144,300
45% RH	Sensible	62,500	77,700	103,500	127,400

BLOWER SECTION

Airflow - CFM	2,500	3,000	4,000	5,000
Standard motor - horsepower	2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>	0.9	1.3	1.5	1.1
Next size motor - horsepower	3	3	5	7.5

COMPRESSORS

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coil	3	4	5	5
Face velocity - fpm	205	246	328	410

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity in lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity in lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at STANDARD airflow - remote air cooled condenser - single compressor

MODEL NUMBER:	DALA-	06-CO-S	08-CO-S	10-CO-S	13-CO-S
----------------------	--------------	----------------	----------------	----------------	----------------

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Note: Efficiency based on ASHRAE Std. 52.2)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	5/8	5/8	5/8
Hot gas line - O.D. Copper	1/2	3/4	3/4	3/4
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between unit and condenser section)

ELECTRICAL SECTION
Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	41/50/60	51/63/80	63/76/100	80/97/125
460/3/60	FLA/MCA/MOP	20/24/30	25/31/40	29/35/50	36/44/60
575/3/60	FLA/MCA/MOP	16/19/25	19/23/30	22/26/35	30/37/50

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	53/65/70	63/78/90	75/91/110	92/112/150
460/3/60	FLA/MCA/MOP	25/30/35	31/38/45	34/42/50	42/51/70
575/3/60	FLA/MCA/MOP	20/25/30	24/29/35	26/32/40	35/42/50

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	25/30/45	35/42/70	46/56/90	64/76/125
460/3/60	FLA/MCA/MOP	12/14/20	18/22/35	22/26/40	29/35/50
575/3/60	FLA/MCA/MOP	9.9/12/15	13/16/25	16/19/30	25/29/45

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6
575/3/60	FLA	2.5	2.5	3.3	5.3

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow - remote air cooled condenser - single compressor

MODEL NUMBER: DALA- **06-CO-S** **08-CO-S** **10-CO-S** **13-CO-S**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60
<u>Electrical data base on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	44/53/60	54/65/90	68/82/110	89/105/150
460/3/60	FLA/MCA/MOP	21/25/30	27/32/45	31/37/50	41/48/60
575/3/60	FLA/MCA/MOP	17/20/25	20/24/30	24/28/35	34/40/50
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/68/70	66/80/100	80/97/125	101/120/150
460/3/60	FLA/MCA/MOP	26/32/35	32/39/50	37/44/50	46/55/70
575/3/60	FLA/MCA/MOP	21/25/30	24/30/35	28/34/40	38/45/60
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	28/32/50	38/45/70	52/61/90	72/85/125
460/3/60	FLA/MCA/MOP	13/16/25	19/23/35	24/28/45	33/39/60
575/3/60	FLA/MCA/MOP	11/13/20	14/17/25	18/21/30	28/33/50

NEXT SIZE MOTOR					
Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0
575/3/60	FLA	3.3	3.3	5.3	8.6

COMPRESSOR					
208-230/3/60	FLA	18.6	28.8	37.2	49.4
460/3/60	FLA	9.0	14.7	17.2	22.4
575/3/60	FLA	7.4	10.8	12.4	19.2

AIR COOLED CONDENSER					
Condenser selection at 95° F ambient	DARC-07	DARC-09	DARC-11	DARC-15	
Condenser selection at 100° F ambient	DARC-07	DARC-11	DARC-15	DARC-17	
Condenser selection at 105° F ambient	DARC-11	DARC-15	DARC-17	DARC-21	

(Notes: Condensers are not available in 575 volts. Condensers are selected at sea level.

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow - remote air cooled condenser - single compressor

MODEL NUMBER: DALA- **06-CO-S** **08-CO-S** **10-CO-S** **13-CO-S**

CAPACITY in Btu/hr - gross

80° DB/67° WB	Total	83,500	104,600	141,500	170,300
50% RH	Sensible	68,600	85,700	113,000	133,300
75° DB/62.5° WB	Total	77,600	97,000	131,700	157,800
50% RH	Sensible	66,200	82,700	109,400	128,800
75° DB/61° WB	Total	75,600	93,900	127,700	152,900
45% RH	Sensible	71,100	88,600	117,000	137,600
72° DB/60° WB	Total	74,000	92,500	125,800	150,300
50% RH	Sensible	64,800	81,000	107,200	126,100
72° DB/58.6° WB	Total	72,200	89,700	122,300	146,200
45% RH	Sensible	69,200	86,300	114,200	134,200

BLOWER SECTION

Airflow - CFM	3,000	3,600	4,750	5,500
Standard motor - horsepower	2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>	1.3	1.5	1.5	0.8
Next size motor - horsepower	3	5	7.5	7.5

COMPRESSOR

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face velocity - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	246	295	389	451

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at OPTIONAL airflow with remote air cooled condenser - single compressor

MODEL NUMBER:	DALA-	06-CO-S	08-CO-S	10-CO-S	13-CO-S
FILTER SECTION					
Quantity		2	2	2	2
Size - inches		20x25x4	20x25x4	20x25x4	20x25x4
Quantity		2	2	2	2
Size - inches		16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV		8	8	8	8

(Note: Efficiency based on ASHRAE Std. 52.2)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	5/8	5/8	5/8
Hot gas line - O.D. Copper	1/2	3/4	3/4	3/4
Condensate drain line	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between unit and condenser section.)

ELECTRICAL SECTION	Standard Motor
---------------------------	-----------------------

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	44/53/60	54/65/90	68/82/110	89/105/150
460/3/60	FLA/MCA/MOP	21/25/30	27/32/45	31/37/50	41/48/60
575/3/60	FLA/MCA/MOP	17/20/25	20/24/30	24/28/35	34/40/50

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	56/68/70	66/80/100	80/97/125	101/120/150
460/3/60	FLA/MCA/MOP	26/32/35	32/39/50	37/44/50	46/55/70
575/3/60	FLA/MCA/MOP	21/25/30	24/30/35	28/34/40	38/45/60

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data base on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	28/32/50	38/45/70	52/61/90	72/85/125
460/3/60	FLA/MCA/MOP	13/16/25	19/23/35	24/28/45	33/39/60
575/3/60	FLA/MCA/MOP	11/13/20	14/17/25	18/21/30	28/33/50

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6
575/3/60	FLA	3.3	3.3	5.3	5.3

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with remote air cooled condenser - single compressor

MODEL NUMBER: **DALA-** **06-CO-S** **08-CO-S** **10-CO-S** **13-CO-S**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	50/58/70	60/71/90	77/90/110	N/A
460/3/60	FLA/MCA/MOP	23/27/30	29/34/45	36/42/50	N/A
575/3/60	FLA/MCA/MOP	19/22/25	22/26/35	27/32/40	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	62/73/80	72/86/100	89/105/125	N/A
460/3/60	FLA/MCA/MOP	28/34/40	34/41/50	41/49/60	N/A
575/3/60	FLA/MCA/MOP	23/27/30	26/32/40	31/37/45	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	33/38/50	43/51/70	60/70/100	N/A
460/3/60	FLA/MCA/MOP	16/18/25	21/25/40	28/33/50	N/A
575/3/60	FLA/MCA/MOP	13/15/20	16/19/30	21/24/35	N/A

NEXT SIZE MOTOR					
Horsepower		5	5	7.5	N/A
208-230/3/60	FLA	14.6	14.6	23.0	N/A
460/3/60	FLA	6.6	6.6	11.0	N/A
575/3/60	FLA	5.3	5.3	8.6	N/A

COMPRESSOR					
208-230/3/60	FLA	18.6	28.8	37.8	N/A
460/3/60	FLA	10.3	14.7	17.2	N/A
575/3/60	FLA	7.4	10.8	15.5	N/A

REMOTE CONDENSER					
Condenser selection at 95° F ambient	DARC-07	DARC-09	DARC-11		N/A
Condenser selection at 100° F ambient	DARC-07	DARC-11	DARC-15		N/A
Condenser selection at 105° F ambient	DARC-11	DARC-15	DARC-17		N/A

(Notes: Condensers are not available in 575 volts. Condensers are selected at sea level.

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow with remote air cooled condenser - dual compressors
MODEL NUMBER: DALA- **06-CO-D** **08-CO-D** **10-CO-D** **13-CO-D**
CAPACITY in BTU/hr - gross

80° DB/67° WB	Total	78,200	104,700	129,700	162,500
50% RH	Sensible	61,100	78,500	100,000	125,700
75° DB/62.5° WB	Total	72,400	97,000	120,200	150,800
50% RH	Sensible	59,000	76,000	96,700	121,600
75° DB/61° WB	Total	70,200	93,900	116,700	146,600
45% RH	Sensible	63,100	80,800	103,300	130,000
72° DB/60° WB	Total	68,900	92,400	114,500	143,700
50% RH	Sensible	57,700	74,500	94,700	119,100
72° DB/58.6° WB	Total	67,000	89,700	111,500	140,300
45% RH	Sensible	61,500	78,900	100,800	126,900

BLOWER SECTION

Airflow - CFM	2,500	3,000	4,000	5,000
Standard motor - horsepower	2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>	0.9	1.3	1.5	1.1
Next size motor - horsepower	3	3	5	7.5

COMPRESSORS

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	205	246	328	410

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at STANDARD airflow with remote air cooled condenser - dual compressors

MODEL NUMBER:	DALA-	06-CO-D	08-CO-D	10-CO-D	13-CO-D
----------------------	--------------	----------------	----------------	----------------	----------------

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - Inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Note: Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Hot gas line - O.D. Copper	1/2	1/2	1/2	1/2
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between unit and condenser section.)

ELECTRICAL SECTION

Standard Motor

Electrical data base on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	58/71/80	63/77/80	68/83/90	75/90/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	31/38/40	34/41/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	26/31/35	28/33/35

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	58/71/80	63/77/80	72/83/90	80/92/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	34/39/40	37/43/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	28/32/35	30/35/40

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	43/50/60	52/60/70	60/68/80	68/77/90
460/3/60	FLA/MCA/MOP	21/24/25	25/28/30	28/32/35	32/36/40
575/3/60	FLA/MCA/MOP	17/19/20	19/21/25	23/27/30	26/29/35

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	55/65/70	64/75/80	72/83/90	80/92/100
460/3/60	FLA/MCA/MOP	26/31/35	30/35/40	34/39/40	37/43/45
575/3/60	FLA/MCA/MOP	21/25/30	23/27/30	28/32/35	30/35/40

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	58/71/80	63/77/80	68/83/90	75/90/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	31/38/40	34/41/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	26/31/35	28/33/35

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	27/29/40	36/39/50	44/48/60	52/57/70
460/3/60	FLA/MCA/MOP	13/15/20	17/19/25	21/23/30	25/27/35
575/3/60	FLA/MCA/MOP	11/12/15	13/14/15	18/19/25	20/22/25

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6
575/3/60	FLA	2.5	2.5	3.3	5.3

AIR COOLED: Performance data at STANDARD airflow - remote air cooled condenser - dual compressors

MODEL NUMBER: DALA- **06-CO-D** **08-CO-D** **10-CO-D** **13-CO-D**

ELECTRICAL SECTION
Next Size Motor

Electrical data based on: electric reheat - **YES**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	30/34/35	34/38/40

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	46/53/60	55/63/70	66/74/80	77/86/100
460/3/60	FLA/MCA/MOP	22/25/30	26/20/35	30/34/40	36/41/50
575/3/60	FLA/MCA/MOP	18/20/25	19/22/25	23/26/30	29/33/40

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	58/68/70	67/78/80	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	27/32/35	31/36/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	22/26/30	24/28/30	30/34/35	34/38/40

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	30/32/40	38/42/50	49/54/70	60/66/80
460/3/60	FLA/MCA/MOP	15/16/20	19/20/25	23/25/30	29/32/40
575/3/60	FLA/MCA/MOP	12/13/15	14/15/20	20/21/25	23/26/30

NEXT SIZE MOTOR

Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0
575/3/60	FLA	3.3	3.3	5.3	8.6

COMPRESSOR

208-230/3/60	FLA	10.3	14.7	17.3	18.6
460/3/60	FLA	5.1	7.1	8.2	9.0
575/3/60	FLA	4.2	5.8	7.1	7.4

REMOTE CONDENSER

Condenser selection at 95° F ambient	DARC-07	DARC-09	DARC-11	DARC-15
Condenser selection at 100° F ambient	DARC-07	DARC-11	DARC-15	DARC-17
Condenser selection at 105° F ambient	DARC-11	DARC-15	DARC-17	DARC-21

(Notes: Condensers are not available in 575 volts. Condensers are selected at sea level.

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with remote air cooled condenser - dual compressors

MODEL NUMBER: DALA- **06-CO-D** **08-CO-D** **10-CO-D** **13-CO-D**

CAPACITY in Btu/hr - gross

80° DB/67° WB	Total	80,400	107,900	133,100	165,100
50% RH	Sensible	67,800	87,000	110,500	132,800
75° DB/62.5° WB	Total	74,400	100,100	123,500	153,200
50% RH	Sensible	65,300	84,000	106,600	128,300
75° DB/61° WB	Total	72,000	96,800	119,600	148,800
45% RH	Sensible	69,700	89,800	114,300	137,300
72° DB/60° WB	Total	70,700	95,400	117,700	146,100
50% RH	Sensible	63,800	82,200	104,300	125,600
72° DB/58.6° WB	Total	68,700	92,500	114,300	142,100
45% RH	Sensible	67,400	87,600	111,300	133,900

BLOWER SECTION

Airflow - CFM	3,000	3,600	4,750	5,500
Standard motor - horsepower	2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>	1.3	1.5	1.5	0.8
Next size motor - horsepower	3	5	7.5	7.5

COMPRESSORS

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	246	295	389	451

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at OPTIONAL airflow with remote air cooled condenser - dual compressors

MODEL NUMBER: DALA- **06-CO-D** **08-CO-D** **10-CO-D** **13-CO-D**

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Note: Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Hot gas line - O.D. Copper	1/2	1/2	1/2	1/2
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between unit and condenser section.)

ELECTRICAL SECTION
Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	30/34/35	34/38/40

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	46/53/60	55/63/70	66/74/80	77/86/100
460/3/60	FLA/MCA/MOP	22/25/30	26/30/35	30/34/40	36/41/50
575/3/60	FLA/MCA/MOP	18/20/25	19/22/25	25/29/30	29/33/40

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	58/68/70	67/78/80	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	27/32/35	31/36/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	22/26/30	24/28/30	30/34/35	34/38/40

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/20
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	30/32/40	38/42/50	49/54/70	60/66/80
460/3/60	FLA/MCA/MOP	15/16/20	19/20/25	23/25/30	29/32/40
575/3/60	FLA/MCA/MOP	12/13/15	14/15/20	20/21/25	23/26/30

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6
575/3/60	FLA	3.3	3.3	5.3	5.3

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with remote air cooled condenser - dual compressors

MODEL NUMBER: *DALA-* **06-CO-D** **08-CO-D** **10-CO-D** **13-CO-D**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/90	71/85/90	82/98/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	38/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	31/37/40	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/90	71/85/90	86/99/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	40/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	33/38/40	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	52/59/70	60/68/70	74/84/100	N/A
460/3/60	FLA/MCA/MOP	24/28/30	28/32/35	35/39/45	N/A
575/3/60	FLA/MCA/MOP	20/22/25	21/24/25	29/32/35	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	64/74/80	72/83/90	86/99/110	N/A
460/3/60	FLA/MCA/MOP	30/35/35	34/39/40	40/46/50	N/A
575/3/60	FLA/MCA/MOP	24/28/30	26/30/35	33/38/40	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/90	71/85/90	82/98/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	38/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	31/37/40	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR</u>					
208-230/3/60	FLA/MCA/MOP	35/29/50	44/48/60	58/63/80	N/A
460/3/60	FLA/MCA/MOP	17/19/25	21/23/60	27/30/40	N/A
575/3/60	FLA/MCA/MOP	14/15/20	16/17/20	23/25/30	N/A

NEXT SIZE MOTOR					
Horsepower		5	5	7.5	N/A
208-230/3/60	FLA	14.6	14.6	23.0	N/A
460/3/60	FLA	6.6	6.6	11.1	N/A
575/3/60	FLA	5.3	5.3	8.6	N/A

COMPRESSOR					
208-230/3/60	FLA	10.3	13.5	17.3	N/A
460/3/60	FLA	5.1	7.4	9.0	N/A
575/3/60	FLA	4.2	5.8	7.1	N/A

REMOTE CONDENSER					
Condenser selection at 95° F ambient	DARC-07	DARC-09	DARC-11		N/A
Condenser selection at 100° F ambient	DARC-07	DARC-11	DARC-15		N/A
Condenser selection at 105° F ambient	DARC-11	DARC-15	DARC-17		N/A

(Notes: Condensers are not available in 575 volts. Condensers are selected at sea level.

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - single compressor

MODEL NUMBER:	DALA-	06-AO-S	08-AO-S	10-AO-S	13-AO-S
----------------------	--------------	----------------	----------------	----------------	----------------

CAPACITY in Btu/hr - gross

80° DB/67° WB	Total	81,400	101,800	137,700	167,400
50% RH	Sensible	62,000	77,400	102,600	126,300
75° DB/62.5° WB	Total	75,500	94,100	128,000	155,400
50% RH	Sensible	60,000	74,700	99,500	122,400
75° DB/61° WB	Total	73,200	91,300	124,000	150,900
45% RH	Sensible	64,000	79,700	105,900	130,500
72° DB/60° WB	Total	71,900	89,500	122,200	148,200
50% RH	Sensible	58,800	73,100	97,700	120,000
72° DB/58.6° WB	Total	69,900	87,000	118,700	144,300
45% RH	Sensible	62,500	77,700	103,500	127,400

BLOWER SECTION

Airflow - CFM	2,500	3,000	4,000	5,000
Standard motor - horsepower	2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>	0.9	1.3	1.5	1.1
Next size motor - horsepower	3	3	5	7.5

COMPRESSOR*(in Outdoor Condensing Unit)*

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	205	246	328	410

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - single compressor

MODEL NUMBER:	DALA-	06-AO-S	08-AO-S	10-AO-S	13-AO-S
FILTER SECTION					
Quantity		2	2	2	2
Size - inches		20x25x4	20x25x4	20x25x4	20x25x4
Quantity		2	2	2	2
Size - inches		16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV		8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	5/8	5/8	5/8
Suction line - O.D. Copper	3/4	1 1/8	1 1/8	1 1/8
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between evaporator section and condensing unit.)

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	23/28/30	23/28/30	25/32/35	31/39/45
460/3/60	FLA/MCA/MOP	11/13/15	11/13/15	12/15/20	14/18/20

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	35/43/45	35/43/45	37/47/50	43/54/60
460/3/60	FLA/MCA/MOP	16/20/25	16/20/25	17/22/25	19/24/25

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	6.2/7.8/15	6.2/7.8/15	9.0/11/15	15/18/30
460/3/60	FLA/MCA/MOP	3.1/3.9/15	3.1/3.9/15	4.4/5.5/15	6.6/8.3/15

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - single compressor

MODEL NUMBER: DALA- **06-AO-S** **08-AO-S** **10-AO-S** **13-AO-S**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/20	14/18/20	18/23/30
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/30	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/25

NEXT SIZE MOTOR					
Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0

CONDENSING UNIT					
Condensing unit at 95° F ambient model number		DRCU-07	DRCU-09	DRCU-11	DRCU-15
208-230/3/60	FLA/MCA/MOP	23/27/45	33/40/60	46/56/90	49/60/100
460/3/60	FLA/MCA/MOP	12/15/25	17/20/35	21/26/40	26/31/50
Condensing unit at 100° F ambient model number		DRCU-07	DRCU-11	DRCU-15	DRCU-17
208-230/3/60	FLA/MCA/MOP	23/27/45	37/44/70	46/56/90	49/60/100
460/3/60	FLA/MCA/MOP	12/15/25	19/23/35	21/26/40	26/31/50
Condensing Unit at 105° F ambient model number		DRCU-11	DRCU-15	DRCU-17	DRCU-21
208-230/3/60	FLA/MCA/MOP	27/32/50	37/44/70	46/56/90	54/64/100
460/3/60	FLA/MCA/MOP	15/17/25	19/23/35	21/26/40	28/34/50

COMPRESSOR					
208-230/3/60	FLA	18.6	28.8	37.8	41.0
460/3/60	FLA	10.3	14.7	17.2	21.8

(Notes: Condensing units are not available in 575 volts. Condensing units are selected at sea level.)

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - single compressor

MODEL NUMBER: DALA- **06-AO-S** **08-AO-S** **10-AO-S** **13-AO-S**

CAPACITY in Btu/hr - gross

80° DB/67° WB 50% RH	Total Sensible	83,500 68,600	104,600 85,700	141,500 113,000	170,300 133,300
75° DB/62.5° WB 50% RH	Total Sensible	77,600 66,200	97,000 82,700	131,700 109,400	157,800 128,800
75° DB/61° WB 45% RH	Total Sensible	75,600 71,100	93,900 88,600	127,700 117,000	152,900 137,600
72° DB/60° WB 50% RH	Total Sensible	74,000 64,800	92,500 81,000	125,800 107,200	150,300 126,100
72° DB/58.6° WB 45% RH	Total Sensible	72,200 69,200	89,700 86,300	122,300 114,200	146,200 134,200

BLOWER SECTION

Airflow - CFM	3,000	3,600	4,750	5,500
Standard motor - horsepower	2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>	1.3	1.5	1.5	0.8
Next size motor - horsepower	3	5	7.5	7.5

COMPRESSOR

(in Outdoor Condensing Unit)

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coil	3	4	5	5
Face velocity - fpm	246	295	389	451

REHEAT SECTION

Electric kW	Standard 15	Standard 15	Standard 15	Standard 15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator kW	Optional 3.4	Optional 3.4	Optional 3.4	Optional 3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - single compressor

MODEL NUMBER: DALA- **06-AO-S** **08-AO-S** **10-AO-S** **13-AO-S**

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	5/8	5/8	5/8
Suction line - O.D. Copper	3/4	1 1/8	1 1/8	1 1/8
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between evaporator section and condensing unit.)

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat **YES**, 10 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/20	14/18/20	18/23/30

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/30	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/25

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - single compressor

MODEL NUMBER: **DALA-** **06-AO-S** **08-AO-S** **10-AO-S** **13-AO-S**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	31/39/45	31/39/45	39/49/60	N/A
460/3/60	FLA/MCA/MOP	14/18/20	14/18/20	18/23/30	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	43/54/60	43/54/60	51/64/80	N/A
460/3/60	FLA/MCA/MOP	19/24/25	19/24/25	24/30/35	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	15/18/30	15/18/30	23/29/50	N/A
460/3/60	FLA/MCA/MOP	6.6/8.3/15	6.6/8.3/15	11/14/25	N/A

NEXT SIZE MOTOR					
Horsepower		5	5	7.5	N/A
208-230/3/60	FLA	14.6	14.6	23.0	N/A
460/3/60	FLA	6.6	6.6	11.0	N/A

CONDENSING UNIT					
Condensing unit at 95° F ambient model number		DRCU-07	DRCU-09	DRCU-11	N/A
208-230/3/60	FLA/MCA/MOP	23/27/45	33/40/60	46/56/90	N/A
460/3/60	FLA/MCA/MOP	12/15/25	17/20/35	21/26/40	N/A
Condensing unit at 100° F ambient model number		DRCU-07	DRCU-11	DRCU-15	N/A
208-230/3/60	FLA/MCA/MOP	23/27/45	37/44/70	46/50/90	N/A
460/3/60	FLA/MCA/MOP	12/15/25	19/23/35	21/26/40	N/A
Condensing unit at 105° F ambient model number		DRCU-11	DRCU-15	DRCU-17	N/A
208-230/3/60	FLA/MCA/MOP	27/32/50	37/44/70	46/56/90	N/A
460/3/60	FLA/MCA/MOP	15/17/25	19/23/35	21/26/40	N/A

COMPRESSOR					
208-230/3/60	FLA	18.6	28.8	37.8	N/A
460/3/60	FLA	10.3	14.7	17.2	N/A

(Notes: Condensing units are not available in 575 volts. Condensing units are selected at sea level.)

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - dual compressors
MODEL NUMBER:
DALA-
06-AO-D
08-AO-D
10-AO-D
13-AO-D
CAPACITY - Btu/hr - gross

80° DB/67° WB	Total	78,200	104,700	129,700	162,500
50% RH	Sensible	61,100	78,500	100,000	125,700
75° DB/62.5° WB	Total	72,400	97,000	120,200	150,800
50% RH	Sensible	59,000	76,000	96,700	121,600
75° DB/61° WB	Total	70,200	93,900	116,700	146,600
45% RH	Sensible	63,100	80,800	103,300	130,000
72° DB/60° WB	Total	68,900	92,400	114,500	143,700
50% RH	Sensible	57,700	74,500	94,700	119,100
72° DB/58.6° WB	Total	67,000	89,700	111,500	140,300
45% RH	Sensible	61,500	78,900	100,800	126,900

BLOWER SECTION

Airflow - CFM		2,500	3,000	4,000	5,000
Standard motor - horsepower		2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>		0.9	1.3	1.5	1.1
Next size motor - horsepower		3	3	5	7.5

COMPRESSORS
(in Outdoor Condensing Unit)

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigerant type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face velocity - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	205	246	328	410

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - dual compressors

MODEL NUMBER:	DALA-	06-AO-D	08-AO-D	10-AO-D	13-AO-D
----------------------	--------------	----------------	----------------	----------------	----------------

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Suction line - O.D. Copper	3/4	3/4	3/4	3/4
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between evaporator section and condensing unit.)

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - **YES**, 10 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	23/28/30	23/28/30	25/32/35	31/39/45
460/3/60	FLA/MCA/MOP	11/13/15	11/13/15	12/15/20	14/18/20

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	35/43/45	35/43/45	37/47/50	43/54/60
460/3/60	FLA/MCA/MOP	16/20/25	16/20/25	17/22/25	19/24/25

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	6.2/7.8/15	6.2/7.8/15	9.0/11/20	15/18/30
460/3/60	FLA/MCA/MOP	3.1/3.9/15	3.1/3.9/15	4.4/5.5/15	6.6/8.3/15

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at STANDARD airflow with outdoor condensing unit - dual compressors

MODEL NUMBER: DALA- **06-AO-D** **08-AO-D** **10-AO-D** **13-AO-D**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/20	14/18/20	18/23/30
<u>Electrical data based on: electric reheat NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	51/63/70	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	23/29/30	30/37/40
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/30	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/15

NEXT SIZE MOTOR					
Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0

CONDENSING UNIT					
Condensing unit at 95° F ambient model number		DRCU-07	DRCU-09	DRCU-11	DRCU-15
208-230/3/60	FLA/MCA/MOP	25/27/35	31/35/45	43/47/60	46/50/60
460/3/60	FLA/MCA/MOP	12/14/15	17/19/25	22/24/30	25/27/35
Condensing unit at 100° F ambient model number		DRCU-07	DRCU-11	DRCU-15	DRCU-17
208-230/3/60	FLA/MCA/MOP	25/27/35	35/39/50	43/47/60	46/50/60
460/3/60	FLA/MCA/MOP	12/14/15	19/21/35	22/24/30	25/27/35
Condensing unit at 105° F ambient model number		DRCU-11	DRCU-15	DRCU-17	DRCU-21
208-230/3/60	FLA/MCA/MOP	29/32/40	35/39/50	43/47/60	50/54/70
460/3/60	FLA/MCA/MOP	14/16/20	19/21/25	22/24/30	27/30/35

COMPRESSORS					
208-230/3/60	FLA	10.3	13.5	17.3	18.6
460/3/60	FLA	5.1	7.4	9.0	10.3

(Notes: Condensing units are not available in 575 volts. Condensing units are selected at sea level.)

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - dual compressors

MODEL NUMBER: DALA- **06-AO-D** **08-AO-D** **10-AO-D** **13-AO-D**

CAPACITY in Btu/hr - gross

80° DB/67° WB	Total	80,400	107,900	133,100	165,100
50% RH	Sensible	67,800	87,000	110,500	132,800
75° DB/62.5° WB	Total	74,400	100,100	123,500	153,200
50% RH	Sensible	65,300	84,000	106,600	128,300
75° DB/61° WB	Total	72,000	96,800	119,600	148,800
45% RH	Sensible	69,700	89,800	114,300	137,300
72° DB/60° WB	Total	70,700	95,400	117,700	146,100
50% RH	Sensible	63,800	82,200	104,300	125,600
72° DB/58.6° WB	Total	68,700	92,500	114,300	142,100
45% RH	Sensible	67,400	87,600	111,300	133,900

BLOWER SECTION

Airflow - CFM	3,000	3,600	4,750	5,500
Standard motor - horsepower	2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.	0.5	0.5	0.5	0.5
Number of motors/fans	1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>	1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>	1.3	1.5	1.5	0.8
Next size motor - horsepower	3	5	7.5	7.5

COMPRESSORS

(in Outdoor Condensing Unit)

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigeration type	R-407C	R-407C	R-407C	R-407C

EVAPORATOR COIL

Face velocity - sq ft	12.2	12.2	12.2	12.2
Rows of coils	3	4	5	5
Face velocity - fpm	246	295	389	451

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr <i>(Adjustable)</i>	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr <i>(Adjustable)</i>	10-30	10-30	10-30	10-30

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - dual compressors

MODEL NUMBER: DALA- **06-AO-D** **08-AO-D** **10-AO-D** **13-AO-D**

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Suction line - O.D. Copper	3/4	3/4	3/4	3/4
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

(Note: Refer to Operation and Maintenance manual for recommended pipe sizing between evaporator section and condensing unit.)

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/17	14/18/20	18/23/30

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/30	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/25

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

AIR COOLED: Performance data at OPTIONAL airflow with outdoor condensing unit - dual compressors

MODEL NUMBER: DALA- **06-AO-D** **08-AO-D** **10-AO-D** **13-AO-D**

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/80	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	31/39/45	31/39/45	39/49/60	N/A
460/3/60	FLA/MCA/MOP	14/18/20	14/18/20	18/23/30	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	43/54/60	43/54/60	51/64/80	N/A
460/3/60	FLA/MCA/MOP	19/24/25	19/24/25	24/30/35	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	15/18/30	15/18/30	23/29/50	N/A
460/3/60	FLA/MCA/MOP	6.6/8.3/15	6.6/8.3/15	11/14/25	N/A

NEXT SIZE MOTOR					
Horsepower		5	5	7.5	N/A
208-230/3/60	FLA	14.6	14.6	23.0	N/A
460/3/60	FLA	6.6	6.6	11.0	N/A

CONDENSING UNIT					
Condensing unit at 95° F ambient model number		DRCU-07	DRCU-09	DRCU-11	N/A
208-230/3/60	FLA/MCA/MOP	25/27/35	31/35/45	43/47/60	N/A
460/3/60	FLA/MCA/MOP	12/14/15	17/19/25	22/24/30	N/A5
<u>Condensing unit at 100° F ambient model number</u>					
208-230/3/60	FLA/MCA/MOP	25/27/35	31/35/45	43/47/60	N/A
460/3/60	FLA/MCA/MOP	12/14/15	17/19/25	22/24/30	N/A
<u>Condensing unit at 105° F ambient model number</u>					
208-230/3/60	FLA/MCA/MOP	29/32/40	35/39/50	43/47/60	N/A
460/3/60	FLA/MCA/MOP	14/16/20	19/21/25	22/24/30	N/A

COMPRESSORS					
208-230/3/60	FLA	10.3	13.5	17.3	N/A
460/3/60	FLA	5.1	7.4	9.0	N/A

(Notes: Condensing units are not available in 575 volts. Condensing units are selected at sea level.)

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER COOLED: Performance data at STANDARD airflow with single compressor

MODEL NUMBER:		DALW	06-P-S	08-P-S	10-P-S	13-P-S
CAPACITY in Btu/hr - gross						
80° DB/67° WB	Total	84,500	110,500	143,200	174,200	
50% RH	Sensible	63,200	80,800	104,800	128,900	
75° DB/62.5° WB	Total	78,500	102,500	133,100	161,700	
50% RH	Sensible	61,200	78,300	101,700	125,000	
75° DB/61° WB	Total	76,300	99,700	129,800	157,400	
45% RH	Sensible	65,300	83,400	108,400	133,300	
72° DB/60° WB	Total	74,900	97,600	127,000	154,200	
50% RH	Sensible	60,100	76,800	99,900	122,600	
72° DB/58.6° WB	Total	72,900	95,100	124,200	150,300	
45% RH	Sensible	63,800	81,400	106,100	130,100	

GLYCOL COOLED: Performance data at STANDARD airflow with single compressor

MODEL NUMBER:		DALG	06-P-S	08-P-S	10-P-S	13-P-S
CAPACITY in Btu/hr - gross						
80° DB/67° WB	Total	80,000	104,400	134,500	163,600	
50% RH	Sensible	61,500	78,400	101,300	124,800	
75° DB/62.5° WB	Total	74,100	96,500	125,000	151,800	
50% RH	Sensible	59,500	75,700	98,300	120,800	
75° DB/61° WB	Total	71,600	93,200	121,500	147,400	
45% RH	Sensible	63,300	80,500	104,800	129,000	
72° DB/60° WB	Total	70,600	91,800	119,300	144,800	
50% RH	Sensible	58,300	74,200	96,400	118,400	
72° DB/58.6° WB	Total	68,300	88,800	116,100	140,900	
45% RH	Sensible	61,800	78,500	102,300	125,900	

-The following sections apply to both Glycol and Water cooled units. -

BLOWER SECTION

Airflow - CFM		2,500	3,000	4,000	5,000
Standard motor - horsepower		2	2	3	5
External Static Pressure - (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>		0.9	1.3	1.5	1.1
Next size motor - horsepower		3	3	5	7.5

COMPRESSOR

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
----------------------	-------------	---------------	---------------	---------------	---------------

EVAPORATOR COIL

Face area - sq ft	12.2	12.2	12.2	12.2
Rows of coil	3	4	5	5
Face velocity - FPM	205	246	328	410

REHEAT SECTION

Electric	Standard	Standard	Standard	Standard
kW	15	15	15	15
Capacity - Btu/hr	51,225	51,225	51,225	51,225

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr	(Adjustable)	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr	(Adjustable)	10-30	10-30	10-30

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

CONNECTION SIZES

Condenser water supply - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8
Condenser water return - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	41/50/60	51/63/80	63/76/100	80/97/125
460/3/60	FLA/MCA/MOP	20/24/30	25/31/40	29/35/50	36/44/60
575/3/60	FLA/MCA/MOP	16/19/25	19/23/30	22/26/35	30/37/50

* W - WATER COOLED

G - GLYCOL COOLED

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
---------------	------	--------	--------	--------	--------

ELECTRICAL SECTION	Standard Motor - <i>continued</i>
--------------------	-----------------------------------

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	53/65/70	63/78/90	75/91/110	92/112/150
460/3/60	FLA/MCA/MOP	25/30/35	31/38/45	34/42/50	42/51/70
575/3/60	FLA/MCA/MOP	20/25/30	24/29/35	26/32/40	35/42/50

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	67/82/90	77/94/110	88/108/125	106/129/150
460/3/60	FLA/MCA/MOP	31/38/40	37/45/50	40/50/60	48/58/70
575/3/60	FLA/MCA/MOP	25/31/35	28/35/40	31/38/45	40/48/60

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO** and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	25/30/45	35/42/70	46/56/90	64/76/125
460/3/60	FLA/MCA/MOP	12/14/20	18/22/35	22/26/40	29/35/50
575/3/60	FLA/MCA/MOP	9.9/12/15	13/16/25	16/19/30	25/29/45

STANDARD MOTOR	
----------------	--

Horsepower		2	2	3	5
208-230/3/60	FLA	6.0	6.0	8.4	14.8
460/3/60	FLA	3.0	3.0	4.2	6.6
575/3/60	FLA	2.5	2.5	3.3	5.3

ELECTRICAL SECTION	Next Size Motor
--------------------	-----------------

Electrical data based on: electric reheat - **YES**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	44/53/60	54/65/90	68/82/110	89/105/150
460/3/60	FLA/MCA/MOP	21/25/30	27/32/45	31/37/50	41/48/60
575/3/60	FLA/MCA/MOP	17/20/25	20/24/30	24/28/35	34/40/50

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	56/68/70	66/80/100	80/97/125	101/120/150
460/3/60	FLA/MCA/MOP	26/32/35	32/39/50	37/44/50	46/55/70
575/3/60	FLA/MCA/MOP	21/25/30	24/30/35	28/34/40	38/45/60

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	28/32/50	38/45/70	52/61/90	72/85/125
460/3/60	FLA/MCA/MOP	13/16/25	19/23/35	24/28/45	33/39/60
575/3/60	FLA/MCA/MOP	11/13/20	14/17/25	18/21/30	28/33/50

* W - WATER COOLED G - GLYCOL COOLED

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
----------------------	-------------	---------------	---------------	---------------	---------------

NEXT SIZE MOTOR

Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0
575/3/60	FLA	3.3	3.3	5.3	8.6

COMPRESSOR

208-230/3/60	FLA	18.6	28.8	37.8	41.0
460/3/60	FLA	10.3	14.7	17.2	21.8
575/3/60	FLA	7.4	10.8	15.5	17.3

FLUID COOLER

Fluid cooler at 95° F ambient model number		DAFC-11	DAFC-15	DAFC-21	DAFC-21
208-230/3/60	FLA/MCA/MOP	8.4/9.5/15	8.4/9.5/15	13/14/15	13/14/15
460/3/60	FLA/MCA/MOP	4.2/4.7/15	4.1/4.7/15	6.3/6.8/15	6.3/6.8/15
Fluid cooler at 100° F ambient model number		DAFC-21	DAFC-21	DAFC-28	DAFC-30
208-230/3/60	FLA/MCA/MOP	13/14/15	13/14/15	13/14/15	17/18/20
460/3/60	FLA/MCA/MOP	6.3/6.8/15	6.3/6.8/15	6.3/6.8/15	8.4/8.9/15

CONDENSER WATER

Requirements

65° F entering fluid temperature	GPM	7	10	12	16
	PD - PSI	1.9	2.1	2.3	3.6
75° F entering fluid temperature	GPM	11	15	19	21
	PD - PSI	2.8	3.4	3.7	4.8
85° F entering fluid temperature	GPM	16	21	26	34
	PD - PSI	3.2	4.0	5.3	6.6
With Fluid Cooler	GPM	21	28	35	46
	PD in PSI	5.9	7.7	10.3	13.8

(Notes: Fluid Coolers are not available in 575 volts. Fluid Coolers are selected at sea level. Pump selection is based on total available head pressure of 80 feet.)

* W - WATER COOLED G - GLYCOL COOLED

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER COOLED: Performance data at OPTIONAL airflow with single compressor

MODEL NUMBER:	DALW	06-P-S	08-P-S	10-P-S	13-P-S
CAPACITY in Btu/hr - gross					
80° DB/67° WB	Total	87,100	114,600	146,900	176,800
50% RH	Sensible	69,900	89,600	115,100	135,900
75° DB/62.5° WB	Total	81,000	106,100	136,700	164,200
50% RH	Sensible	67,600	86,500	111,500	131,500
75° DB/61° WB	Total	78,500	102,800	133,200	159,500
45% RH	Sensible	72,300	92,300	119,300	140,500
72° DB/60° WB	Total	77,200	101,000	130,600	156,700
50% RH	Sensible	66,200	84,600	109,300	128,900
72° DB/58.6° WB	Total	75,100	98,000	127,600	152,600
45% RH	Sensible	70,500	90,000	116,500	137,100

GLYCOL COOLED: Performance data at OPTIONAL airflow with single compressor

MODEL NUMBER:	DALG	06-P-S	08-P-S	10-P-S	13-P-S
CAPACITY in Btu/hr - gross					
80° DB/67° WB	Total	82,100	107,400	138,900	166,300
50% RH	Sensible	68,000	86,800	112,000	131,700
75° DB/62.5° WB	Total	76,200	99,400	128,900	154,400
50% RH	Sensible	65,700	83,700	108,200	127,400
75° DB/61° WB	Total	73,800	96,200	125,200	149,700
45% RH	Sensible	70,400	89,600	116,000	136,200
72° DB/60° WB	Total	72,700	94,600	122,900	147,300
50% RH	Sensible	64,300	81,900	106,000	124,800
72° DB/58.6° WB	Total	70,600	91,800	119,900	143,100
45% RH	Sensible	68,600	87,200	113,100	132,900

-The following sections apply to both Glycol and Water cooled units. -

BLOWER SECTION

Airflow - CFM		3,000	3,600	4,750	5,500
Standard motor - horsepower		2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>		1.3	1.5	1.5	0.8
Next size motor - horsepower		3	5	7.5	7.5

COMPRESSOR

Type	Scroll	Scroll	Scroll	Scroll
Quantity	1	1	1	1
Refrigerant type	R-407C	R-407C	R-407C	R-407C

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
EVAPORATOR COIL					
Face area - sq ft		12.2	12.2	12.2	12.2
Rows of coils		3	4	5	5
Face velocity - fpm		246	295	389	451
REHEAT SECTION					
Electric kW	Standard	Standard	Standard	Standard	Standard
Capacity - Btu/hr	51,225	51,225	51,225	51,225	51,225
HUMIDIFIER SECTION					
Steam generator kW	Optional	Optional	Optional	Optional	Optional
Capacity - lb/hr (Adjustable)	3.4	3.4	3.4	3.4	3.4
kW	10	10	10	10	10
Capacity - lb/hr (Adjustable)	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
	10-30	10-30	10-30	10-30	10-30
FILTER SECTION					
Quantity	2	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8	8
(Efficiency based on ASHRAE Std. 52.2.)					
CONNECTION SIZES					
Condenser water supply - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condenser water return - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condensate drain	3/4	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4	1/4
ELECTRICAL SECTION			Standard Motor		
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	44/53/60	54/65/90	68/82/110	89/105/150
460/3/60	FLA/MCA/MOP	21/25/30	27/32/45	31/37/50	41/48/60
575/3/60	FLA/MCA/MOP	17/20/25	20/24/30	24/28/35	34/40/50

* W - WATER COOLED G - GLYCOL COOLED

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
----------------------	-------------	---------------	---------------	---------------	---------------

ELECTRICAL SECTION

Standard Motor - *continued*

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	56/68/70	66/80/100	80/97/125	101/120/150
460/3/60	FLA/MCA/MOP	26/32/35	32/39/50	37/44/50	46/55/70
575/3/60	FLA/MCA/MOP	21/25/30	24/30/35	28/34/40	38/45/60

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	69/84/90	80/97/110	94/113/125	114/137/175
460/3/60	FLA/MCA/MOP	32/39/40	38/46/50	43/52/60	52/63/80
575/3/60	FLA/MCA/MOP	26/31/35	29/36/40	33/40/45	43/51/60

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	28/32/50	38/45/70	52/61/90	72/85/125
460/3/60	FLA/MCA/MOP	13/16/25	19/23/35	24/28/45	33/39/60
575/3/60	FLA/MCA/MOP	11/13/20	14/17/25	18/21/30	28/33/50

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6
575/3/60	FLA	3.3	3.3	5.3	5.3

ELECTRICAL SECTION

Next Size Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	50/58/70	60/71/90	77/90/110	N/A
460/3/60	FLA/MCA/MOP	23/27/30	29/34/45	36/42/50	N/A
575/3/60	FLA/MCA/MOP	19/22/25	22/26/35	27/32/40	N/A

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	62/73/80	72/86/100	89/105/125	N/A
460/3/60	FLA/MCA/MOP	28/34/40	34/41/50	41/49/60	N/A
575/3/60	FLA/MCA/MOP	23/27/30	26/32/40	31/37/45	N/A

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	75/90/100	85/103/110	102/122/125	N/A
460/3/60	FLA/MCA/MOP	34/41/45	40/49/50	47/56/60	N/A
575/3/60	FLA/MCA/MOP	28/33/35	31/38/45	36/43/50	N/A

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	33/38/50	43/51/70	60/70/100	N/A
460/3/60	FLA/MCA/MOP	16/18/25	21/25/40	28/33/50	N/A
575/3/60	FLA/MCA/MOP	13/15/20	16/19/30	21/24/35	N/A

* W - WATER COOLED G - GLYCOL COOLED

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with single compressor

MODEL NUMBER:	DAL*	06-P-S	08-P-S	10-P-S	13-P-S
----------------------	-------------	---------------	---------------	---------------	---------------

NEXT SIZE MOTOR

Horsepower		5	5	7.5	7.5
208-230/3/60	FLA	14.6	14.6	23.0	23.0
460/3/60	FLA	6.6	6.6	11.0	11.0
575/3/60	FLA	5.3	5.3	8.6	8.6

COMPRESSOR

208-230/3/60	FLA	18.6	28.8	37.8	41.0
460/3/60	FLA	10.3	14.7	17.2	21.8
575/3/60	FLA	7.4	10.8	15.5	17.3

FLUID COOLER

Fluid cooler at 95° F ambient model number		DAFC-11	DAFC-15	DAFC-21	DAFC-21
208-230/3/60	FLA/MCA/MOP	8.4/9.5/15	8.4/9.5/15	13/14/15	13/14/15
460/3/60	FLA/MCA/MOP	4.2/4.7/15	4.2/4.7/15	6.3/6.8/15	6.3/6.8/15
Fluid cooler at 100° F ambient model number		DAFC-21	DAFC-21	DAFC-28	DAFC-30
208-230/3/60	FLA/MCA/MOP	13/14/15	13/14/15	13/14/15	17/18/20
460/3/60	FLA/MCA/MOP	6.3/6.8/15	6.3/6.8/15	6.3/6.8/15	8.4/8.9/15

CONDENSER WATER

65° F entering fluid temperature	GPM	7	10	12	16
	PD in PSI	1.9	2.1	2.3	3.6
75° F Entering Fluid Temperature	GPM	11	15	19	21
	PD in PSI	2.8	3.4	3.7	4.8
85° F Entering Fluid Temperature	GPM	16	21	26	34
	PD in PSI	3.2	4.0	5.3	6.6
With Fluid Cooler	GPM	21	28	35	46
	PD in PSI	5.9	7.7	10.3	13.8

PUMP SELECTION

At design flow

Horsepower	1	1.5	1.5	2
------------	---	-----	-----	---

(Notes: Fluid Coolers are not available in 575 volts. Fluid Coolers are selected at sea level. Pump selection is based on total available head pressure of 80 feet.)

* W - WATER COOLED G - GLYCOL COOLED

FLA - Full load amps
R-407C

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER COOLED: Performance data at STANDARD airflow with dual compressors

MODEL NUMBER:	DALW	06-P-D	08-P-D	10-P-D	13-P-D
CAPACITY in Btu/hr - gross					
80° DB/67° WB	Total	86,000	108,500	135,300	168,500
50% RH	Sensible	64,200	80,000	102,200	128,000
75° DB/62.5° WB	Total	79,700	100,600	125,400	157,000
50% RH	Sensible	62,100	77,500	98,900	124,300
75° DB/61° WB	Total	77,400	98,000	121,500	152,800
45% RH	Sensible	66,200	82,600	105,400	132,600
72° DB/60° WB	Total	75,900	95,800	119,500	150,100
50% RH	Sensible	60,800	76,000	96,900	122,000
72° DB/58.6° WB	Total	73,900	93,600	116,100	146,300
45% RH	Sensible	64,600	80,700	102,800	129,600

GLYCOL COOLED: Performance data at STANDARD airflow with dual compressors

MODEL NUMBER:	DALG	06-P-D	08-P-D	10-P-D	13-P-D
CAPACITY in Btu/hr - gross					
80° DB/67° WB	Total	76,600	102,500	127,300	159,600
50% RH	Sensible	60,600	77,700	99,100	124,500
75° DB/62.5° WB	Total	70,900	94,900	118,000	148,000
50% RH	Sensible	58,500	75,100	95,800	120,400
75° DB/61° WB	Total	68,800	91,900	114,300	143,300
45% RH	Sensible	62,500	79,900	102,200	128,500
72° DB/60° WB	Total	67,500	90,400	112,400	141,000
50% RH	Sensible	57,200	73,600	98,800	117,900
72° DB/58.6° WB	Total	65,600	87,700	109,100	136,900
45% RH	Sensible	60,900	78,000	99,700	125,400

-The following sections apply to both Glycol and Water cooled units. -

BLOWER SECTION

Airflow - CFM		2,500	3,000	4,000	5,000
Standard motor - horsepower		2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>		0.9	1.3	1.5	1.1
Next size motor - horsepower		3	3	5	7.5

COMPRESSORS

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigerant type	R-407C	R-407C	R-407C	R-407C

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with dual compressors

MODEL NUMBER:	DAL*	06-P-D	08-P-D	10-P-D	13-P-D
EVAPORATOR COIL					
Face area - sq ft		12.2	12.2	12.2	12.2
Rows of coils		3	4	5	5
Face velocity - fpm		205	246	328	410
REHEAT SECTION					
Electric	Standard	Standard	Standard	Standard	Standard
kW	15	15	15	15	15
Capacity Btu/hr	51,225	51,225	51,225	51,225	51,225
HUMIDIFIER SECTION					
Steam generator	Optional	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4	3.4
Capacity - lb/hr (Adjustable)	10	10	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr (Adjustable)	10-30	10-30	10-30	10-30	10-30
FILTER SECTION					
Quantity	2	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8	8
(Efficiency based on ASHRAE Std. 52.2.)					
CONNECTION SIZES					
Condenser water supply - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condenser water return - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condensate drain	3/4	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4	1/4
ELECTRICAL SECTION					
Standard Motor					
Electrical data based on: electric reheat - YES , 10 lb/hr steam generator humidifier - YES , and STANDARD MOTOR.					
208-230/3/60	FLA/MCA/MOP	58/71/80	63/77/80	68/83/90	75/90/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	31/38/40	34/41/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	26/31/35	28/33/35
Electrical data based on: electric reheat - YES , 30 lb/hr steam generator humidifier - YES , and STANDARD MOTOR.					
208-230/3/60	FLA/MCA/MOP	61/74/80	63/77/80	72/83/90	80/92/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	34/39/40	37/43/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	28/32/35	30/35/40
Electrical data based on: electric reheat - NO , 10 lb/hr steam generator humidifier - YES , and STANDARD MOTOR.					
208-230/3/60	FLA/MCA/MOP	43/50/60	52/60/70	60/68/80	68/77/90
460/3/60	FLA/MCA/MOP	21/24/25	25/28/30	28/32/35	32/36/40
575/3/60	FLA/MCA/MOP	17/19/20	19/21/25	23/27/30	26/29/35

* W - Water cooled G - Glycol cooled

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with dual compressors

MODEL NUMBER:	DAL*	06-P-D	08-P-D	10-P-D	13-P-D
----------------------	-------------	---------------	---------------	---------------	---------------

ELECTRICAL SECTION	Standard Motor - <i>continued</i>
---------------------------	--

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	55/65/70	64/75/80	72/83/90	80/92/100
460/3/60	FLA/MCA/MOP	26/31/35	30/35/40	34/39/40	37/43/45
575/3/60	FLA/MCA/MOP	21/25/30	23/27/30	28/32/35	30/35/40

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	58/71/80	63/77/80	68/83/90	75/90/100
460/3/60	FLA/MCA/MOP	27/33/35	29/36/40	31/38/40	34/41/45
575/3/60	FLA/MCA/MOP	22/27/30	23/28/30	26/31/35	28/33/35

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	27/29/40	36/39/50	44/48/60	52/57/70
460/3/60	FLA/MCA/MOP	13/15/20	17/19/25	21/23/30	25/27/35
575/3/60	FLA/MCA/MOP	11/12/15	13/14/15	18/19/25	20/22/25

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6
575/3/60	FLA	2.5	2.5	3.3	5.3

ELECTRICAL SECTION

Next Size Motor

Electrical data based on: electric reheat - **YES**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	30/34/35	34/38/40

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	46/53/60	55/63/70	66/74/80	77/86/100
460/3/60	FLA/MCA/MOP	22/25/30	26/30/35	30/34/40	36/41/50
575/3/60	FLA/MCA/MOP	18/20/25	19/22/25	25/29/30	29/33/40

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	58/68/70	67/78/80	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	27/32/35	31/36/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	22/26/30	24/28/30	30/34/35	34/38/40

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	30/32/40	38/42/50	49/54/70	60/66/80
460/3/60	FLA/MCA/MOP	15/16/20	19/20/25	23/25/30	29/32/40
575/3/60	FLA/MCA/MOP	12/13/15	14/15/20	20/21/25	23/26/30

* W - Water cooled G - Glycol cooled

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at STANDARD airflow with dual compressors

MODEL NUMBER:	DAL*	06-P-D	08-P-D	10-P-D	13-P-D
----------------------	-------------	---------------	---------------	---------------	---------------

NEXT SIZE MOTOR

Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0
575/3/60	FLA	3.3	3.3	5.3	8.6

COMPRESSORS

208-230/3/60	FLA	10.3	13.5	17.3	18.6
460/3/60	FLA	5.1	7.4	9.0	10.3
575/3/60	FLA	4.2	5.8	7.1	7.4

FLUID COOLER

Fluid cooler at 95° F ambient model number		DAFC-11	DAFC-15	DAFC-21	DAFC-21
208-230/3/60	FLA/MCA/MOP	8.4/9.5/15	8.4/9.5/15	13/14/15	13/14/15
460/3/60	FLA/MCA/MOP	4.2/4.7/15	4.2/4.7/15	6.3/6.8/15	6.3/6.8/15
Fluid cooler at 100° F ambient model number		DAFC-21	DAFC-21	DAFC-28	DAFC-30
208-230/3/60	FLA/MCA/MOP	13/14/15	13/14/15	13/14/15	17/18/20
460/3/60	FLA/MCA/MOP	6.3/6.8/15	6.3/6.8/15	6.3/6.8/15	8.4/8.9/15

CONDENSER WATER

65° F entering fluid temperature	GPM	7	10	12	16
	PD in PSI	1.9	2.1	2.3	3.6
75° F entering fluid temperature	GPM	11	15	19	21
	PD in PSI	2.8	3.4	3.7	4.8
85° F entering fluid temperature	GPM	16	21	26	34
	PD in PSI	3.2	4.0	5.3	6.6
With fluid cooler	GPM	21	28	35	46
	PD in PSI	5.9	7.7	10.3	13.8

PUMP SELECTION

at design flow

Horsepower	1	1.5	1.5	2
------------	---	-----	-----	---

(Notes: Fluid Coolers are not available in 575 volts. Fluid Coolers are selected at sea level. Pump selection is based on total available head pressure of 80 feet.)

* W - Water cooled G - Glycol cooled

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER COOLED: Performance data at OPTIONAL airflow with dual compressors

MODEL NUMBER:		DALW	06-P-D	08-P-D	10-P-D	13-P-D
CAPACITY in Btu/hr - gross						
80° DB/67° WB	Total	88,500	113,000	138,400	171,700	
50% RH	Sensible	70,800	88,900	112,400	135,300	
75° DB/62.5° WB	Total	82,100	104,600	128,800	159,700	
50% RH	Sensible	68,400	85,800	108,800	131,000	
75° DB/61° WB	Total	79,600	101,000	124,900	154,800	
45% RH	Sensible	73,200	91,600	116,500	139,900	
72° DB/60° WB	Total	78,300	99,600	123,000	152,500	
50% RH	Sensible	67,000	84,000	106,600	128,400	
72° DB/58.6° WB	Total	76,100	96,500	119,400	148,200	
45% RH	Sensible	71,400	89,300	113,500	136,600	

GLYCOL COOLED: Performance data at OPTIONAL airflow with dual compressors

MODEL NUMBER:		DALG	06-P-D	08-P-D	10-P-D	13-P-D
CAPACITY in Btu/hr - gross						
80° DB/67° WB	Total	79,000	105,800	130,400	161,700	
50% RH	Sensible	67,300	86,200	109,500	131,400	
75° DB/62.5° WB	Total	73,100	97,900	120,600	150,400	
50% RH	Sensible	64,800	83,100	105,500	127,100	
75° DB/61° WB	Total	70,800	94,900	117,100	145,100	
45% RH	Sensible	69,000	89,000	112,900	135,800	
72° DB/60° WB	Total	69,500	93,200	114,700	143,600	
50% RH	Sensible	63,200	81,300	103,000	124,500	
72° DB/58.6° WB	Total	67,500	90,700	111,900	138,900	
45% RH	Sensible	66,600	86,700	109,600	132,500	

-The following sections apply to both Glycol and Water cooled units. -

BLOWER SECTION

Airflow - CFM		3,000	3,600	4,750	5,500
Standard motor - horsepower		2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (<i>Standard Motor</i>)		1.3	1.5	1.5	0.8
Maximum E.S.P. (<i>Next Size Motor</i>)		1.3	1.5	1.5	0.8
Next size motor - horsepower		3	5	7.5	7.5

COMPRESSORS

Type	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2
Refrigerant type	R-407C	R-407C	R-407C	R-407C

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with dual compressors

MODEL NUMBER:	DAL*	06-P-D	08-P-D	10-P-D	13-P-D
EVAPORATOR COIL					
Face area - sq ft		12.2	12.2	12.2	12.2
Rows of coils		3	4	5	5
Face velocity - fpm		246	295	389	451
REHEAT SECTION					
Electric kW	Standard	Standard	Standard	Standard	Standard
Capacity Btu/hr	15	15	15	15	15
	51,225	51,225	51,225	51,225	51,225
HUMIDIFIER SECTION					
Steam generator kW	Optional	Optional	Optional	Optional	Optional
Capacity - lb/hr (Adjustable)	3.4	3.4	3.4	3.4	3.4
kW	10	10	10	10	10
Capacity - lb/hr (Adjustable)	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
	10-30	10-30	10-30	10-30	10-30
FILTER SECTION					
Quantity	2	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8	8
(Efficiency based on ASHRAE Std. 52.2.)					
CONNECTION SIZES					
Condensate water supply - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condensate water return - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
Condensate drain	3/4	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4	1/4
ELECTRICAL SECTION					
Standard Motor					
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	30/34/35	34/38/40
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	46/53/60	55/63/70	66/74/80	77/86/100
460/3/60	FLA/MCA/MOP	22/25/30	26/30/35	30/34/40	36/41/50
575/3/60	FLA/MCA/MOP	18/20/25	19/22/25	25/29/30	29/33/40

* W - Water cooled G - Glycol cooled

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with dual compressors

MODEL NUMBER: **DAL*** **06-P-D** **08-P-D** **10-P-D** **13-P-D**

ELECTRICAL SECTION		Standard Motor - continued			
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	58/68/70	67/78/80	78/89/90	89/101/110
460/3/60	FLA/MCA/MOP	27/32/35	31/36/40	36/41/45	42/48/50
575/3/60	FLA/MCA/MOP	22/26/30	24/28/30	30/34/35	34/38/40
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	61/74/80	65/80/90	74/88/90	83/100/110
460/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/40/45	39/46/50
575/3/60	FLA/MCA/MOP	23/27/30	24/29/30	28/33/35	31/37/40
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	30/32/40	38/42/50	49/54/70	60/66/80
460/3/60	FLA/MCA/MOP	15/16/20	19/20/25	23/25/30	29/32/40
575/3/60	FLA/MCA/MOP	12/13/15	14/15/20	20/21/25	23/26/30

STANDARD MOTOR					
Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6
575/3/60	FLA	3.3	3.3	5.3	5.3

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/90	71/85/90	82/98/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	38/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	31/37/40	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/90	71/85/90	86/99/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	40/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	33/38/40	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	52/59/70	60/68/70	74/84/100	N/A
460/3/60	FLA/MCA/MOP	24/28/30	28/32/35	35/39/45	N/A
575/3/60	FLA/MCA/MOP	20/22/25	21/24/25	29/32/35	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	64/74/80	72/83/90	86/99/110	N/A
460/3/60	FLA/MCA/MOP	30/35/35	34/39/40	40/46/50	N/A
575/3/60	FLA/MCA/MOP	24/28/30	26/30/35	33/38/40	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	67/81/60	71/85/90	82/98/110	N/A
460/3/60	FLA/MCA/MOP	31/37/40	33/39/40	38/46/50	N/A
575/3/60	FLA/MCA/MOP	25/30/35	26/31/35	31/37/40	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	35/39/50	44/48/60	58/63/80	N/A
460/3/60	FLA/MCA/MOP	17/19/25	21/23/30	27/30/40	N/A
575/3/60	FLA/MCA/MOP	14/15/20	16/17/20	23/25/30	N/A

* W - WATER COOLED G - GLYCOL COOLED

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

WATER/GLYCOL COOLED: Performance data at OPTIONAL airflow with dual compressors

MODEL NUMBER:	DAL*	06-P-D	08-P-D	10-P-D	13-W-D
NEXT SIZE MOTOR					
Horsepower		5	5	7.5	7.5
208-230/3/60	FLA	14.8	14.8	20.0	20.0
460/3/60	FLA	6.6	6.6	10.1	10.1
575/3/60	FLA	5.3	5.3	8.6	8.6
COMPRESSORS					
208-230/3/60	FLA	10.3	13.5	17.3	18.6
460/3/60	FLA	5.1	7.4	9.0	10.3
575/3/60	FLA	4.2	5.8	7.1	7.4
FLUID COOLER					
Fluid cooler at 95° F ambient model number		DAFC-11	DAFC-15	DAFC-21	DAFC-21
208-230/3/60	FLA/MCA/MOP	8.4/9.5/15	8.4/9.5/15	13/14/15	13/14/15
460/3/60	FLA/MCA/MOP	4.2/4.7/15	4.2/4.7/15	6.3/6.8/15	6.3/6.8/15
Fluid cooler at 100° F ambient model number		DAFC-21	DAFC-21	DAFC-24	DAFC-30
208-230/3/60	FLA/MCA/MOP	13/14/15	13/14/15	13/14/15	17/18/20
460/3/60	FLA/MCA/MOP	6.3/6.8/15	6.3/6.8/15	6.3/6.8/15	8.4/8.9/15
CONDENSER WATER					
65° F entering fluid temperature	GPM PD in PSI	7 1.9	10 2.1	12 2.3	16 3.6
75° F entering fluid temperature	GPM PD in PSI	11 2.8	15 3.4	19 3.7	21 4.8
85° F entering fluid temperature	GPM PD in PSI	16 3.2	21 4.0	26 5.3	34 6.6
With fluid cooler	GPM PD in PSI	21 5.9	28 7.7	35 10.3	46 13.8
PUMP SELECTION					
		at design flow			
Horsepower		1	1.5	1.5	2

(Notes: Fluid Coolers are not available in 575 volts. Fluid Coolers are selected at sea level. Pump selection is based on total available head pressure of 80 feet.)

* W - Water cooled G - Glycol cooed

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

CHILLED WATER: Performance data at STANDARD airflow

MODEL NUMBER:		DALC-06	DALC-08	DALC-10	DALC-13
CAPACITY in Btu/hr - gross		45°F Entering Chilled Water			
80° DB/67° WB	Total	97,600	126,600	161,900	194,900
50% RH	Sensible	68,700	87,400	113,900	148,100
Flow rate - GPM		17.0	19.0	20.0	25.0
Pressure drop - PSI		7.4	8.3	10.1	15.3
75° DB/62.5° WB	Total	73,600	95,900	123,800	150,300
50% RH	Sensible	60,300	76,800	100,800	123,600
Flow rate - GPM		15.0	17.0	18.0	23.0
Pressure drop - PSI		5.8	6.8	8.3	13.1
75° DB/61° WB	Total	67,900	88,400	115,300	136,900
45% RH	Sensible	62,000	79,000	104,300	126,100
Flow rate - GPM		14.0	16.0	17.0	20.0
Pressure drop - PSI		5.1	6.1	7.4	10.1
72° DB/60° WB	Total	60,900	79,500	103,300	120,700
50% RH	Sensible	54,500	69,500	91,700	109,700
Flow rate - GPM		13.0	15.0	16.0	18.0
Pressure drop - PSI		4.5	5.4	6.7	8.3
72° DB/58.6° WB	Total	57,100	73,100	97,600	113,100
45% RH	Sensible	55,800	70,700	94,600	111,500
Flow rate - GPM		12.0	13.0	15.0	16.0
Pressure drop - PSI		3.8	4.1	5.9	6.7
BLOWER SECTION					
Airflow - CFM		2,500	3,000	4,000	5,000
Standard motor - horsepower		2	2	3	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		0.9	1.3	1.4	1.1
Maximum E.S.P. <i>(Next Size Motor)</i>		0.9	1.3	1.5	1.1
Next size motor - horsepower		3	3	5	7.5
CHILLED WATER COIL					
Face area - sq ft		12.2	12.2	12.2	12.2
Rows of coils		3	4	5	5
Face velocity - FPM		205	246	328	410
CHILLED WATER CONTROL					
Design Pressure 400 psi					
Control method		On/Off	On/Off	On/Off	On/Off
Valve body		3-Way	3-Way	3-Way	3-Way
Valve CV		10	16	16	16
Valve size - inches		1	1 1/4	1 1/4	1 1/4
REHEAT SECTION					
Electric kW	Standard	Standard	Standard	Standard	Standard
Capacity in Btu/hr	15	15	15	15	15

CHILLED WATER: Performance data at STANDARD airflow

MODEL NUMBER:

DALC-06

DALC-08

DALC-10

DALC-13

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr	(Adjustable)	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr	(Adjustable)	10-30	10-30	10-30

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35
575/3/60	FLA/MCA/MOP	18/22/25	18/22/25	18/23/25	20/26/30

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35
575/3/60	FLA/MCA/MOP	18/22/25	18/22/25	18/23/25	20/26/30

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	23/28/30	23/28/30	25/32/35	31/39/45
460/3/60	FLA/MCA/MOP	11/13/15	11/13/15	12/15/20	14/18/20
575/3/60	FLA/MCA/MOP	8.4/11/15	8.4/11/15	9.2/12/15	11/14/15

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	35/43/45	35/43/45	37/47/50	43/54/60
460/3/60	FLA/MCA/MOP	16/20/25	16/20/25	17/22/25	19/24/25
575/3/60	FLA/MCA/MOP	13/16/20	13/16/20	14/17/20	16/19/20

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35
575/3/60	FLA/MCA/MOP	18/22/25	18/22/25	18/23/25	20/26/30

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	6.0/8.0/15	6.2/7.8/15	9.0/11/20	15/18/30
460/3/60	FLA/MCA/MOP	3.1/3.9/15	3.1/3.9/15	4.4/5.5/15	6.6/8.3/15
575/3/60	FLA/MCA/MOP	2.5/3.1/15	2.5/3.1/15	3.3/4.1/15	5.3/6.6/15

STANDARD MOTOR

Horsepower		2	2	3	5
208-230/3/60	FLA	6.2	6.2	9.0	14.6
460/3/60	FLA	3.1	3.1	4.4	6.6
575/3/60	FLA	2.5	2.5	3.3	5.3

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

CHILLED WATER: Performance data at STANDARD airflow

MODEL NUMBER:	DALC-06	DALC-08	DALC-10	DALC-13
----------------------	----------------	----------------	----------------	----------------

ELECTRICAL SECTION	Next Size Motor
---------------------------	------------------------

Electrical data based on: electric reheat - **YES**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - **YES**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - **NO**, 10 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/20	14/18/20	18/23/30
575/3/60	FLA/MCA/MOP	9.2/12/15	9.2/12/15	11/14/15	15/18/25

Electrical data based on: electric reheat - **NO**, 30 lb/hr steam generator humidifier - **YES**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35
575/3/60	FLA/MCA/MOP	14/17/20	14/17/20	16/19/20	19/24/30

Electrical data based on: electric reheat - **YES**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - **NO**, steam generator humidifier - **NO**, and NEXT SIZE MOTOR.

208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/20	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/25
575/3/60	FLA/MCA/MOP	3.3/4.1/15	3.3/4.1/15	5.3/6.6/15	8.6/11/15

NEXT SIZE MOTOR

Horsepower		3	3	5	7.5
208-230/3/60	FLA	9.0	9.0	14.6	23.0
460/3/60	FLA	4.4	4.4	6.6	11.0
575/3/60	FLA	3.3	3.3	5.3	8.6

CONNECTION SIZES

Supply - O.D. Copper		1-1/8	1-5/8	1-5/8	1-5/8
Return - O.D. Copper		1-1/8	1-5/8	1-5/8	1-5/8
Condensate drain		3/4	3/4	3/4	3/4
Humidifier supply		1/4	1/4	1/4	1/4

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

CHILLED WATER: Performance data at OPTIONAL airflow

MODEL NUMBER:	DALC-06	DALC-08	DALC-10	DALC-13	
CAPACITY in Btu/hr - gross		at 45°F Entering Chilled Water			
80° DB/67° WB	Total	106,700	138,600	175,000	203,600
50% RH	Sensible	77,700	98,900	127,800	148,100
Flow rate - GPM		17.0	19.0	20.0	25.0
Pressure drop - PSI		7.4	8.3	10.1	15.3
75° DB/62.5° WB	Total	80,900	105,700	135,000	157,700
50% RH	Sensible	68,500	87,500	113,800	132,200
Flow rate - GPM		15.0	17.0	18.0	23.0
Pressure drop - PSI		5.8	6.8	8.3	13.1
75° DB/61° WB	Total	75,200	98,400	126,900	144,300
45% RH	Sensible	70,500	90,300	118,000	134,800
Flow rate - GPM		14.0	16.0	17.0	20.0
Pressure drop - PSI		5.1	6.1	7.4	10.1
72° DB/60° WB	Total	67,100	88,100	113,100	126,800
50% RH	Sensible	61,800	79,300	103,400	117,000
Flow rate - GPM		13.0	15.0	16.0	18.0
Pressure drop - PSI		4.5	5.4	6.7	8.3
72° DB/58.6° WB	Total	63,600	81,700	107,900	119,200
45% RH	Sensible	63,000	80,300	106,300	118,300
Flow rate - GPM		12.0	13.0	15.0	16.0
Pressure drop - PSI		3.8	4.1	5.9	6.7
BLOWER SECTION					
Airflow - CFM		3,000	3,600	4,750	5,500
Standard motor - horsepower		2	3	5	5
External Static Pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. <i>(Standard Motor)</i>		1.3	1.5	1.5	0.8
Maximum E.S.P. <i>(Next Size Motor)</i>		1.3	1.5	1.5	0.8
Next size motor - horsepower		3	5	7.5	7.5
CHILLED WATER COIL					
Face area - sq ft		12.2	12.2	12.2	12.2
Rows of coils		3	4	5	5
Face velocity - fpm		246	295	389	451
CHILLED WATER CONTROL		Design pressure 400 psi			
Control method		On/Off	On/Off	On/Off	On/Off
Valve body		3-way	3-way	3-way	3-way
Valve CV		10	16	16	16
Valve size - inches		1	1 1/4	1 1/4	1 1/4
REHEAT SECTION					
Electric kW		Standard	Standard	Standard	Standard
Capacity - Btu/hr		51,225	51,225	51,225	51,225

CHILLED WATER: Performance data at OPTIONAL airflow

MODEL NUMBER: **DALC-06** **DALC-08** **DALC-10** **DALC-13**

FILTER SECTION

Quantity	2	2	2	2
Size - inches	20x25x4	20x25x4	20x25x4	20x25x4
Quantity	2	2	2	2
Size - inches	16x25x4	16x25x4	16x25x4	16x25x4
Efficiency - MERV	8	8	8	8

(Efficiency based on ASHRAE Std. 52.2.)

HUMIDIFIER SECTION

Steam generator	Optional	Optional	Optional	Optional
kW	3.4	3.4	3.4	3.4
Capacity - lb/hr	(Adjustable)	10	10	10
kW	3.4-10.2	3.4-10.2	3.4-10.2	3.4-10.2
Capacity - lb/hr	(Adjustable)	10-30	10-30	10-30

ELECTRICAL SECTION

Standard Motor

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	25/32/35	25/32/35	31/39/45	39/49/60
460/3/60	FLA/MCA/MOP	12/15/20	12/15/20	14/18/20	18/23/30
575/3/60	FLA/MCA/MOP	9.2/12/15	9.2/12/15	11/14/15	15/18/25

Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	37/47/50	37/47/50	43/54/60	51/64/80
460/3/60	FLA/MCA/MOP	17/22/25	17/22/25	19/24/25	24/30/35
575/3/60	FLA/MCA/MOP	14/17/20	14/17/20	16/19/20	19/24/30

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	51/63/70	51/63/70	56/70/80	65/81/90
460/3/60	FLA/MCA/MOP	23/29/30	23/29/30	25/32/35	30/37/40
575/3/60	FLA/MCA/MOP	18/23/25	18/23/25	20/26/30	24/30/35

Electrical data based on: electric reheat - NO, steam generator humidifier, - NO, and STANDARD MOTOR.

208-230/3/60	FLA/MCA/MOP	9.0/11/20	9.0/11/20	15/18/30	23/29/50
460/3/60	FLA/MCA/MOP	4.4/5.5/15	4.4/5.5/15	6.6/8.3/15	11/14/25
575/3/60	FLA/MCA/MOP	3.3/4.1/15	3.3/4.1/15	5.3/6.6/15	8.6/11/15

STANDARD MOTOR

Horsepower		3	3	5	5
208-230/3/60	FLA	9.0	9.0	14.6	14.6
460/3/60	FLA	4.4	4.4	6.6	6.6
575/3/60	FLA	3.3	3.3	5.3	5.3

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum Rating of the Overcurrent Protective Device

CHILLED WATER: Performance data at OPTIONAL airflow

MODEL NUMBER: *DALC-06 DALC-08 DALC-10 DALC-13*

ELECTRICAL SECTION		Next Size Motor			
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
575/3/60	FLA/MCA/MOP	20/26/30	20/26/30	24/30/35	N/A
<u>Electrical data based on: electric reheat - YES, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	56/70/80	56/70/80	65/81/90	N/A
460/3/60	FLA/MCA/MOP	25/32/35	25/32/35	30/37/40	N/A
575/3/60	FLA/MCA/MOP	20/26/30	20/26/30	24/30/35	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	31/39/45	31/39/45	39/49/60	N/A
460/3/60	FLA/MCA/MOP	14/18/20	14/18/20	18/23/30	N/A
575/3/60	FLA/MCA/MOP	11/14/15	11/14/15	15/18/25	N/A
<u>Electrical data based on: electric reheat - NO, 30 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	43/54/60	43/54/60	51/64/80	N/A
460/3/60	FLA/MCA/MOP	19/24/25	19/24/25	24/30/35	N/A
575/3/60	FLA/MCA/MOP	16/19/20	16/19/20	19/24/30	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	48/60/70	48/60/70	51/63/70	56/70/80
460/3/60	FLA/MCA/MOP	22/27/30	22/27/30	23/29/30	25/32/35
575/3/60	FLA/MCA/MOP	18/22/25	18/22/25	18/23/25	20/26/30
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/3/60	FLA/MCA/MOP	6.2/7.8/15	6.2/7.8/15	9.0/11/20	15/18/30
460/3/60	FLA/MCA/MOP	3.1/3.9/15	3.1/3.9/15	4.4/5.5/15	6.6/8.3/15
575/3/60	FLA/MCA/MOP	2.5/3.1/15	2.5/3.1/15	3.3/4.1/15	5.3/6.6/15

NEXT SIZE MOTOR

Horsepower		5	5	7.5	7.5
208-230/3/60	FLA	14.6	14.6	23.0	23.0
460/3/60	FLA	6.6	6.6	11.0	11.0
575/3/60	FLA	5.3	5.3	8.6	8.6

CONNECTION SIZES

Supply - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8
Return - O.D. Copper	1-5/8	1-5/8	1-5/8	1-5/8
Condensate drain	3/4	3/4	3/4	3/4
Humidifier supply	1/4	1/4	1/4	1/4

LCS - Dimensional and weight data - evaporator section

AIR COOLED with SINGLE COMPRESSOR

Model	Length	Width	Height	Operating Weight	Shipping Weight
DALA-06xx-CO-S	72.00	48.00	28.50	855	975 lbs
DALA-08xx-CO-S	72.00	48.00	28.50	955	1,075 lbs
DALA-10xx-CO-S	72.00	48.00	28.50	980	1,100 lbs
DALA-13xx-CO-S	72.00	48.00	28.50	1,015	1,135 lbs

AIR COOLED with DUAL COMPRESSORS

(using remote air cooled condenser)

Model	Length	Width	Height	Operating Weight	Shipping Weight
DALA-06xx-CO-D	72.00	48.00	28.50	890	1,010 lbs
DALA-08xx-CO-D	72.00	48.00	28.50	915	1,035 lbs
DALA-10xx-CO-D	72.00	48.00	28.50	990	1,110 lbs
DALA-13xx-CO-D	72.00	48.00	28.50	1,025	1,145 lbs

AIR COOLED with SINGLE COMPRESSOR

(using outdoor condensing unit)

Model	Length	Width	Height	Operating Weight	Shipping Weight
DALA-06xx-AO-S	72.00	48.00	28.50	755	875 lbs
DALA-08xx-AO-S	72.00	48.00	28.50	850	970 lbs
DALA-10xx-AO-S	72.00	48.00	28.50	950	1,070 lbs
DALA-13xx-AO-S	72.00	48.00	28.50	980	1,100 lbs

AIR COOLED with DUAL COMPRESSORS

(using outdoor condensing unit)

Model	Length	Width	Height	Operating Weight	Shipping Weight
DALA-06xx-AO-D	72.00	48.00	28.50	790	910 lbs
DALA-08xx-AO-D	72.00	48.00	28.50	885	1,005 lbs
DALA-10xx-AO-D	72.00	48.00	28.50	985	1,140 lbs
DALA-13xx-AO-D	72.00	48.00	28.50	1,015	1,135 lbs

WATER/GLYCOL COOLED with SINGLE COMPRESSOR

Model	Length	Width	Height	Operating Weight	Shipping Weight
DAL*-06xx-P-S	72.00	48.00	28.50	1,005	1,125 lbs
DAL*-08xx-P-S	72.00	48.00	28.50	1,105	1,225 lbs
DAL*-10xx-P-S	72.00	48.00	28.50	1,160	1,280 lbs
DAL*-13xx-P-S	72.00	48.00	28.50	1,205	1,325 lbs

WATER/GLYCOL COOLED with DUAL COMPRESSORS

Model	Length	Width	Height	Operating Weight	Shipping Weight
DAL*-06xx-P-D	72.00	48.00	28.50	1,040	1,160 lbs
DAL*-08xx-P-D	72.00	48.00	28.50	1,080	1,200 lbs
DAL*-10xx-P-D	72.00	48.00	28.50	1,130	1,250 lbs
DAL*-13xx-P-D	72.00	48.00	28.50	1,175	1,295 lbs

CHILLED WATER

Model	Length	Width	Height	Operating Weight	Shipping Weight
DALC-06xx	72.00	48.00	28.50	550	670 lbs
DALC-08xx	72.00	48.00	28.50	570	690 lbs
DALC-10xx	72.00	48.00	28.50	630	750 lbs
DALC-13xx	72.00	48.00	28.50	660	780 lbs



230 W. BlueRidge Avenue
Orange CA 92865
800-347-2473

www.dataaire.com e-mail: sales@dataaire.com

A Member of the CS Group of Companies

© 2013 Data Aire Inc.

Data Aire, Inc. reserves the right to make design changes for the purposes of product improvement, or to withdraw any design without notice.

DALCS-R407C-120414

