

EZ5000 Series Online Volumetric Alkalinity and Hardness Analyzers

Applications

- Wastewater
- Drinking Water
- Power
- Surface Water



Online automatic titration of Hardness and Alkalinity in water

Results you can rely on

EZ5000 Series Analyzers are multi-parameter titrators that achieve excellent precision and accuracy. Depending on the parameter of interest, the measuring range and the water matrix the EZ5000 Series may use either potentiometry i.e. acid-base, redox or precipitation titration, where the endpoint is determined by a change in a specific variable, or photolorimetry, where color change is used to determine the endpoint of the titration. The high precision dispenser for addition, robust peristaltic pumps for sampling and drain, and carefully designed liquid pathways all add up to the highest performance for industrial and environmental analysis needs.

Smart automatic features for validation, priming and cleaning are embedded in the controller software and contribute to analytical performance, maximized uptime and negligible operator intervention. Sample lines and analysis vessel are cleaned with demineralized water to eliminate cross contamination between samples. Electronic and wet-chemical part of the analyzer are strictly separated. A transparent door allows for instant visual inspection of the wet part.

Flexibility that meets your needs

EZ Series Alkalinity and Hardness Analyzers come in an attractive, ergonomic mainframe with a compact footprint. All hardware is controlled by the integrated industrial panel PC. The modular build allows for the analyzer to match your application and operational needs.

- The standard measuring range can be narrowed by a different calibration range or extended via internal dilution options.
- Analog and digital output options
- Multiple stream analysis for up to 8 sample streams

Options for the determination of Alkalinity and Hardness include: Free + Total Alkalinity; Total + Calcium Hardness; Free Alkalinity + Total Hardness; Total Alkalinity + Total Hardness; Free + Total Alkalinity + Total Hardness; Free + Total Alkalinity + Total + Calcium Hardness




Be Right™

Technical Data*

Parameter	Total Hardness, Calcium Hardness, Free & Total Alkalinity	Automatic cleaning	Yes
Measurement Method	Acid-base titration (alkalinity only); Calmagite EDTA titration with LED dipping probe (combined)	Calibration	N.A.
Range	EZ5011 Total Hardness: 25 - 1000 mg/L CaCO ₃ Alkalinity: 40 - 1000 mg/L CaCO ₃ Optional: Total Hardness: 10 - 250 mg/L CaCO ₃ Alkalinity: 10 - 250 mg/L CaCO ₃ Total Hardness: 25 - 500 mg/L CaCO ₃ Alkalinity: 20 - 500 mg/L CaCO ₃ All other EZ50xx variants Total / Calcium Hardness: 25 - 1000 mg/L CaCO ₃ Total / Free Alkalinity: 100 - 5000 mg/L CaCO ₃ Optional: Total / Calcium Hardness: 10 - 100 mg/L CaCO ₃ Total / Free Alkalinity: 10 - 500 mg/L CaCO ₃ Total / Calcium Hardness: 10 - 250 mg/L CaCO ₃ Total / Free Alkalinity: 25 - 1250 mg/L CaCO ₃ Total / Calcium Hardness: 25 - 500 mg/L CaCO ₃ Total / Free Alkalinity: 50 - 2500 mg/L CaCO ₃	Validation	Automatic; frequency freely programmable
Precision	Better than 2% full scale range for standard test solutions	Ambient Temperature	10 - 30 °C ± 4 °C deviation (50 - 86 °F ± 7.2 °F deviation) at 5 - 95% relative humidity (non-condensing)
Lower Limit of Detection (LOD)	Hardness: ≤ 10 mg/L Alkalinity: ≤ 10 mg/L	Reagent Requirements	Keep between 10 - 30 °C (50 - 86 °F)
Interferences	Hardness: Some metal ions interfere by causing fading or indistinct end points or by stoichiometric consumption of EDTA. Suspended or colloidal organic matter also may interfere with the end point. Large amounts of color and turbidity interferes. Fats, oil, proteins, surfactants and tar. Alkalinity: Soaps, oily matter, suspended solids or precipitates may coat the glass electrode and cause a sluggish response. Allow additional time between titrant additions to let the electrode come to equilibrium or clean the electrodes occasionally.	Sample Pressure	By external overflow vessel
Cycle Time	20 - 30 minutes 40 minutes (+ Total Hardness Ca)	Sample Flow Rate	100 - 300 mL/min
		Sample Temperature	10 - 30 °C (50 - 86 °F)
		Sample Quality	Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU
		Power	100 - 240 VAC, 50/60 Hz Max. power consumption: 120 VA
		Instrument Air	Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air
		Deminerlized Water	For rinsing / dilution
		Drain	Atmospheric pressure, vented, min. Ø 64 mm
		Earth Connection	Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ²
		Analog Outputs	Active 4 - 20 mA max. 500 Ohm load, standard 1, max. 8 (option)
		Digital Outputs	Optional: RS232, Modbus (TCP/IP, RS485)
		Alarm	1 x malfunctioning, 4 x user-configurable, max. 24 VDC/0.5 A, potential free contacts
		Protection Class	Analyzer cabinet: IP55 / Panel PC: IP65
		Material	Hinged part: Thermoform ABS, door: plexiglass Wall section: Galvanized steel, powder coated
		Dimensions (H x W x D)	690 mm x 465 mm x 330 mm
		Weight	25 kg (55 lbs.)
		Certifications	CE compliant / UL certified

*Subject to change without notice.

Dimensions

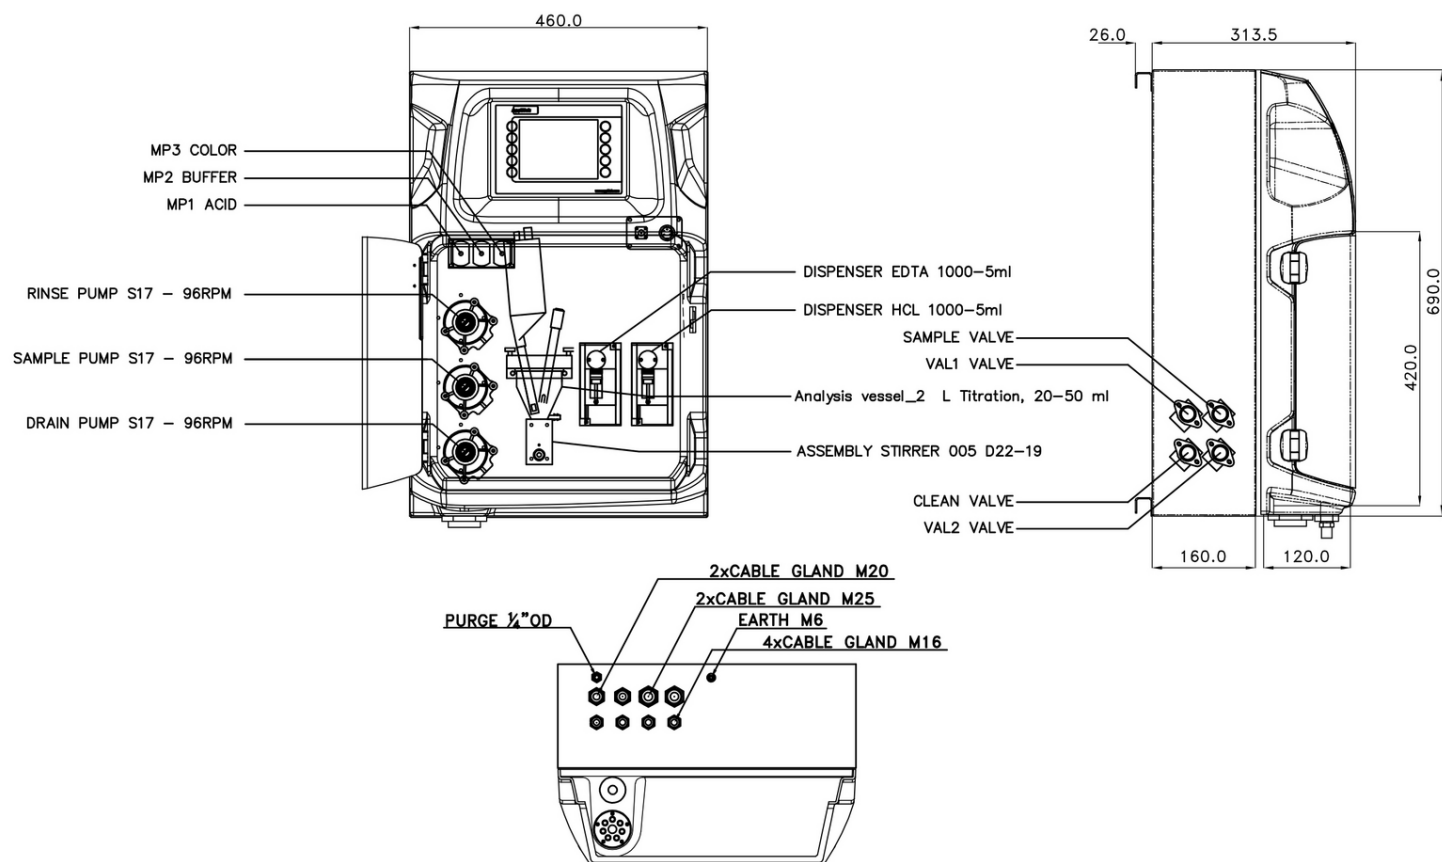

Hach Service

With Hach Service, you have a global partner who understands your needs and cares about delivering timely, high-quality service you can trust. Our Service Team brings unique expertise to help you maximize instrument uptime, ensure data integrity, maintain operational stability, and reduce compliance risk.

Order Information - Part Number Configurator

Total/Free Alkalinity, 100-5000 mg/L	EZ5001.99						
Total Hardness/TH Ca, 100-1000 mg/L	EZ5002.99						
Total Hardness, 25-1000 mg/L, & Free Alkalinity, 100-5000 mg/L	EZ5003.99						
Total Hardness, 25-1000 mg/L, & Total Alkalinity, 100-5000 mg/L	EZ5004.99	X	X	X	X	X	2
Total Hardness, 25-1000 mg/L, & Total/Free Alkalinity, 100-5000 mg/L	EZ5005.99						
Total Hardness/TH Ca, 25-1000 mg/L, & Total/Free Alkalinity, 100-5000 mg/L	EZ5006.99						
Total Hardness, 25-1000 mg/L, & Total Alkalinity 40-1000 mg/L	EZ5011.99						
Measurement range settings / Dilution options							
10% of standard range		A					
25% of standard range		B					
50% of standard range		C					
Standard range		0					
Internal dispenser dilution (max. factor 100) (only EZ5001, EZ5002)		5					
Power supply							
Standard 100 - 240 VAC, 50/60 Hz						0	
Number of sample streams							
1 stream							1
2 streams							2
3 streams							3
4 streams							4
5 streams							5
6 streams							6
7 streams							7
8 streams							8
Outputs							
2x mA							2
3x mA							3
4x mA							4
5x mA							5
6x mA							6
7x mA							7
8x mA							8
RS232							A
Modbus TCP/IP							B
Modbus RS485							C
2x mA + Modbus RS485							F
3x mA + Modbus RS485							G
4x mA + Modbus RS485*							H
1x mA + Modbus TCP/IP							I
2x mA + Modbus TCP/IP							J
3x mA + Modbus TCP/IP							K
4x mA + Modbus TCP/IP*							L
<i>*Combinations of up to 8x mA + Modbus are available.</i>							
No adaption, standard version							0