

MODEL VS_(L)

ANSI B16.5 Slip-On, Raised Face Flanges - Class 150 or 300

DESCRIPTION AND GENERAL PERFORMANCE SPECIFICATIONS

The V-Cone® flowmeter is a patented, differential pressure type flow measurement device. A cone is positioned in the center of the pipe to increase the velocity of the flowing fluid and create a differential pressure. This pressure difference can be measured and used to accurately interpret flowrate. Two taps are provided on every V-Cone to allow sensing of the high and low pressures. A typical V-Cone application can follow these general performance specifications:

- Accuracy: up to ±0.5% of rate
- Repeatability: ±0.1%
- Turndown: 10:1
- Standard Betas: 0.45 through 0.85
- Headloss: Percentage of differential pressure produced varies with beta ratio.
- Installation: Typically 0-3 diameters upstream and 0-1 diameters downstream.


Model VS Bulletins
ANSI B16.5 Slip-on, RF Flanges
24509-32 Class 150 or 300
24509-33 Class 600 or 900
24509-34 Class 125 or 250



The V-Cone is manufactured under a quality management system that is certified to ISO 9001:2015.

* Each V-Cone is sized for the intended application. Specific performance ratings must be obtained through the sizing process.

MODEL VS_(L) DIMENSIONS

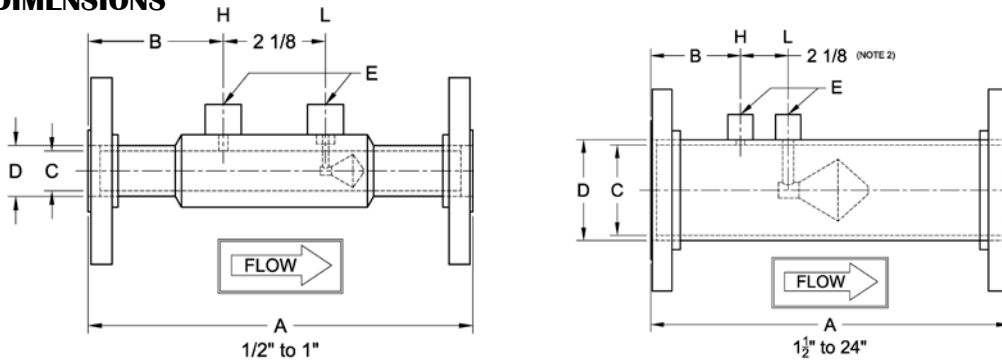

DIMENSION TABLE

Size inch	A (Note 1)		B		C-Stainless (Note 2)		C-Carbon (Note 2)		D		E (Note 2)
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	NPT
1/2	8	203	2.9	75	0.622	15.8	-	-	0.84	21.3	1/4
3/4	8	203	2.9	75	0.824	20.9	-	-	1.05	26.7	1/4
1	8	203	2.9	75	1.049	26.64	-	-	1.315	33.4	1/4
1 1/2	10	254	3	76	1.645	41.78	-	-	1.9	48.3	1/4
2	12	305	3.5	89	2.104	53.44	-	-	2.375	60.3	1/2
2 1/2	12	305	3.5	89	2.504	63.60	-	-	2.875	73.0	1/2
3	14	356	3.5	89	3.104	78.84	-	-	3.5	88.9	1/2
4	16	406	4	102	4.090	103.8	-	-	4.5	114	1/2
6	22	559	4.25	108	6.065	154.1	6.065	154.1	6.625	168	1/2
8	26	660	5	127	7.981	202.7	7.981	202.7	8.625	219	1/2
10	28	711	5	127	10.02	254.5	10.02	254.5	10.75	273	1/2
12	30	762	5.25	133	12.00	304.8	11.94	303.3	12.75	323	1/2
14	30	762	6	152	13.25	336.6	13.13	333.5	14	355	1/2
16	30	762	6	152	15.25	387.4	15.00	381.0	16	406	1/2
18	32	813	6	152	17.25	438.2	17.25	438.2	18	457	1/2
20	36	914	6	152	19.25	489.0	19.25	489.0	20	508	1/2
24	48	1219	10	254	23.25	590.6	23.25	590.6	24	609	1/2

1. Overall length (A) tolerance varies with line size: 1/2" to 1", ±1/16" (±2mm); 1 1/2" to 10", ±1/8" (±4mm); 12" to 24", ±3/16" (±6mm).
2. Typical values shown.
3. Wall pressure ports are required for vertical up flow applications.



SPECIFICATION SHEET

MODEL NUMBER CONFIGURATION VS(L)

Type	Size	Materials‡		Pipe Schedule	End Connections		Fittings			
VS	0A	½"	Q	S304/L	D	Std	03	CL 150 RF SO	N	NPT
	0B	¾"	A	S316/L	R	30	04	CL 300 RF SO	S	Socket
	01	1"	S	CS Tube S304 Cone, Support, & Couplings Epoxy Coated Blue (excluding cone)	E	40			F	Direct mount assembly
	0C	1½"			Q	60				
	02	2"			F	80				
	0D	2½"			J	100				
	03	3"	U	CS Tube S304 Cone, Support, & Couplings	K	120				
	04	4"			L	140				
	06	6"	F	CS Tube, Flanges, & Couplings, 316/L Cone & Supports	G	160				
	08	8"			P	XS				
	10	10"			H	XXS				
	12	12"	G	LTCS Tube, Flanges, & Couplings, S316/L Cone & Supports						
	14	14"								
	16	16"	N	S304/L Tube, Cone, Support & Couplings CS Steel Flanges						
	18	18"								
	20	20"								
24	24"									

Several types of fittings available.

‡Other materials can include:
 HASTELLOY C-276
 DUPLEX 2205
 CHROMEMOLY P22/P11
 MONEL K400/K500
 CARBON STEELS
 A350, A333, API5L, A106B
 S321H
 INCONEL 625

Example: VS06QE03N V-Cone 6 inch line size, S304, schedule 40 pipe, ANSI CL 150 RF slip on flanges, ½" NPT fittings

STANDARD PIPE SCHEDULES

Stainless Steel		Carbon Steel	
Size	Std.	Size	Std.
½" to 10"	E	6" to 16"	E
12" and up	D	18" and up	D

Meters 6" and smaller utilize seamless pipe.
 Meters 8" and larger utilize welded pipe.

ABBREVIATIONS

ASME	American Society of Mechanical Engineers		
NPT	National pipe taper		
SS	Stainless steel	RF	Raised Face
CS	Carbon steel	SO	Slip On

Technical questions can be answered through a local representative or through our application engineers.

MANUFACTURING STANDARDS

McCrometer's welders and welding procedures are qualified in accordance with ASME Section IX. All meters are visually inspected for weld defects. Specific customer requirements can be complied with upon request.

The welding can be in accordance with:

- ASME Section VIII
- ASME B31.1
- ASME B31.3

Non-destructive testing can include:

- Hydrostatic Pressure Testing
- Penetrant Examination
- Radiographic Examination
- Positive Material Inspection
- Magnetic Particle Examination

REPRESENTED BY:

