

DESCRIPTION

Fabricated epoxy-coated steel top plate assembly, drilled to match ANSI B16.5 150 PSI standard steel flanges with stainless steel drop pipe to be used with Customer-supplied cast iron Tee is supplied with: brass bearing housing, stainless steel bearings, polypropylene impeller, straightening vanes, magnetic drive, instantaneous flow indicator and straight reading six-digit totalizer.

FEATURES

Impellers

Impellers are manufactured of high-impact plastic, capable of retaining their shape and accuracy over the life of the meter.

Each impeller is individually calibrated at the factory to accommodate the use of any standard McCrometer register, and since no change gears are used, the MWC00 can be field-serviced without the need for factory recalibration.

Bearings

Factory lubricated, stainless steel bearings are used to support the impeller shaft.


The sealed bearing design limits the entry of materials and fluids into the bearing chamber providing maximum bearing protection.

Register

The instantaneous flowrate indicator is standard and available in gallons per minute, cubic feet per second, liters per second and other units.

The register is driven by a flexible steel cable encased within a protective vinyl liner.

The register housing protects both the register and cable drive system from moisture while allowing clear reading of the flowrate indicator and totalizer.

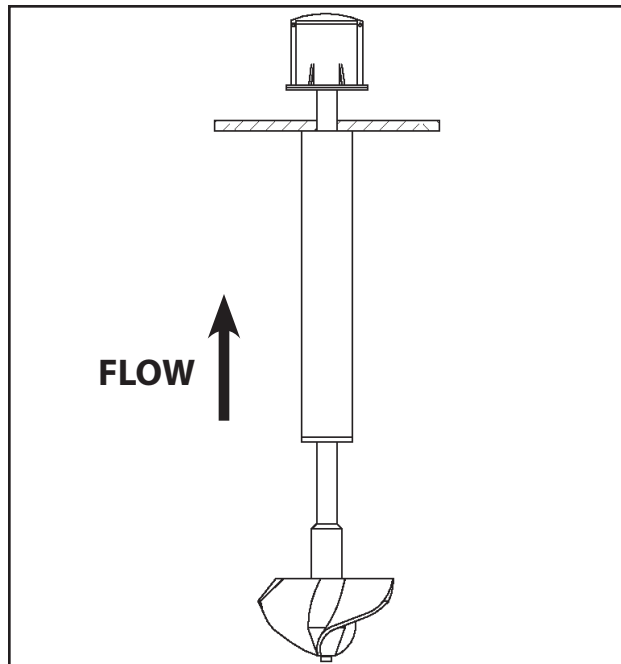

Typical Applications

The McCrometer propeller meter is the most widely used flow meter for municipal and wastewater treatment applications as well as agricultural and turf irrigation measurement. Typical applications include:

- Water and wastewater management
- Center pivot systems
- Sprinkler irrigation systems
- Drip irrigation systems
- Golf course and park water management
- Gravity turnouts from underground pipelines
- Commercial Nurseries



Specification Sheet

MWC00 Upflow Top Plate Assembly for Existing Flow Meter Tubes

INSTALLATION

Meter may be mounted in any convenient position compatible with the balance of the system, as long as a full pipeline is assured. Specify direction of flow when ordering. Model MWC00 for up flow and model MMC00 for down flow.

SPECIFICATIONS

Performance

Accuracy / Repeatability	<ul style="list-style-type: none"> • $\pm 2\%$ of reading guaranteed throughout full range • $\pm 1\%$ over reduced range • Repeatability 0.25% or better
Range	3" to 16"
Maximum Temperature	(Standard Construction) 160°F constant
Pressure Rating	150 psi. Consult factory for special applications.


Materials

Top Plate	Stainless steel (2" to 4") or fusion-bonded epoxy coated carbon steel (6" and larger)
Bearing Assembly	Impeller shaft - 316 stainless steel. Ball bearings - 440C stainless steel
Bearing Housing	304 stainless steel standard, 316 stainless steel optional
Magnets	Permanent type; cast or sintered alnico
Register	An instantaneous flowrate indicator and six-digit straight-reading totalizer is standard. The register is hermetically sealed within a die cast aluminum case. This protective housing includes a domed acrylic lens and hinges cover with locking hasp.
Impeller	Impellers are manufactured of high-impact plastic, retaining their shape and accuracy over the life of the meter.

Options

<ul style="list-style-type: none"> • Extended warranty • Digital register • Can be fitted with any flange standard including common international standards • Register extensions • High temperature construction • Marathon bearing assembly for higher than normal flowrates 4" and above • A complete line of flow recording/control instrumentation • Canopy boot

DIMENSIONS

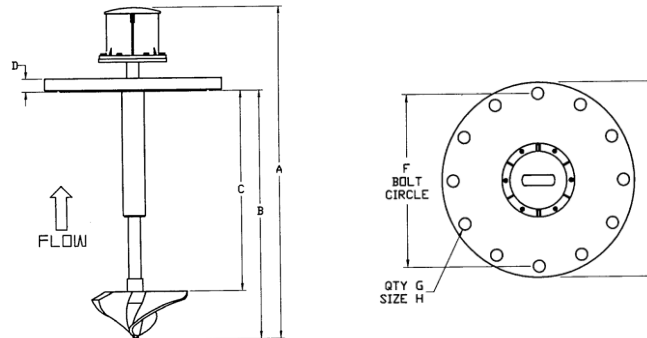


MWC00 (UP FLOW) / MWC00 (DOWN FLOW)	DIMENSIONS							
Meter and Nominal Pipe Size (inches)	3	4	6	8	10	12	14	16
Minimum Flow U.S. GPM	40	50	90	100	125	150	250	275
Maximum Flow U.S. GPM	250	600	1200	1500	1800	2500	300	4000
Maximum Flow w/ Marathon Bearing		900	1800	2250	2700	3750	4500	6000
Approx. Head Loss in Inches at Max. Flow	29.5	23	17	6.75	3.75	2.75	2	1.75
Standard Dial Face (GPM/Gal)		800/100	1300/100	2500/100	3K/1K	4K/1K	6K/1K	8K/1K
Approx. Shipping Weight- lbs.	50	87	128	182	272	370	519	601
A (inches)	24	24 3/4	27 1/2	27 1/2	34 1/2	34 1/2	40 1/2	44 3/4
B (inches)	16	16 3/4	19 1/2	19 1/2	26 7/8	28 3/4	40 1/2	44 3/4
C (inches)	12 1/4	12 1/2	13 1/8	13 1/8	20 1/8	22 1/2	26 1/4	40 3/4
D (inches)	15/16	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/16
E (inches)	7 1/2	9	11	13 1/2	16	19	21	23 1/2
F (inches)	6	7 1/2	9 1/2	11 3/4	14 1/4	17	18 3/4	21 1/4
G (no. of bolt holes)	4	8	8	8	12	12	12	16
H (inches)	3/4	3/4	7/8	7/8	1	1	1 1/8	1 1/8

Flanges in accordance with A.S.A., B16.5, A.S.T.M. A181 Grade I.

Larger flowmeters on special order.

TOTALIZERS

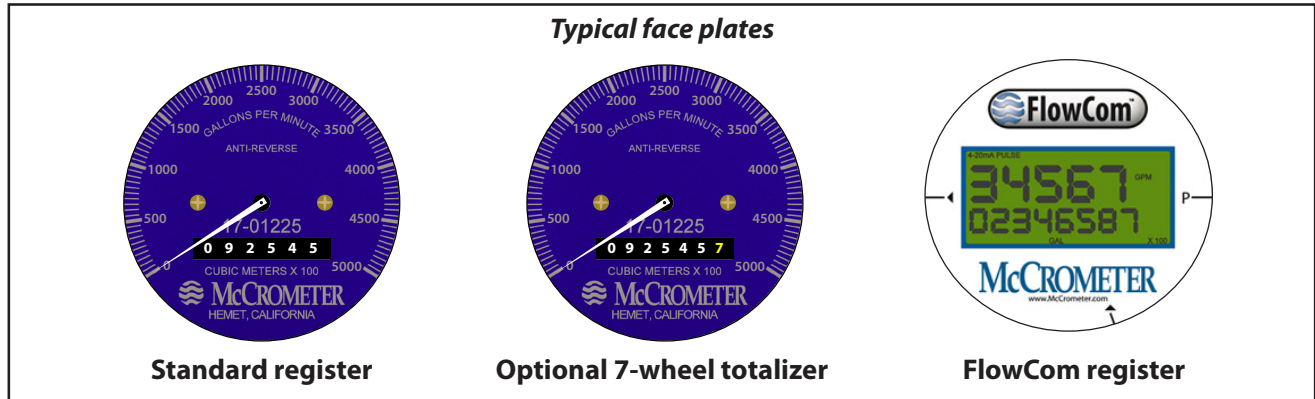

Mechanical Totalizer

The instantaneous flowrate indicator is standard and available in gallons per minute, cubic feet per second, liters per second and other units. The register is driven by a flexible steel cable encased within a protective vinyl liner. The register housing protects both the register and cable drive system from moisture while allowing clear reading of the flowrate indicator and totalizer.



Digital Totalizer

The optional FlowCom register displays a flowmeter's flowrate and volumetric total. Available are optional outputs: scaled pulse and/or industry standard 4-20mA signal. The FlowCom can be fitted to any new or existing McCrometer propeller flowmeter.



Wireless Telemetry

The optional FlowConnect is designed specifically for wireless telemetry via either satellite or cellular data service. Manual meter reading is never required. It uses either the mechanical register or the digital register (both shown above).

You can determine how often readings are made and transmitted to the cloud database, which you can view on a PC or on a cell phone. The viewing utility provides data tools that can analyze flow rate, consumption, and possible anomalies in an irrigation system.

Copyright © 2001-2019 McCrometer, Inc. All printed material should not be changed or altered without permission of McCrometer. Any published pricing, technical data, and instructions are subject to change without notice. Contact your McCrometer representative for current pricing, technical data, and instructions.