

**MODEL VS<sub>(H)</sub>**

**ANSI B16.5 Slip-on, Raised Face Flanges - Class 600 or 900**

**DESCRIPTION AND GENERAL PERFORMANCE SPECIFICATIONS**

The V-Cone® flowmeter is a patented, differential pressure type flow measurement device. A cone is positioned in the center of the pipe to increase the velocity of the flowing fluid and create a differential pressure. This pressure difference can be measured and used to accurately interpret flowrate. Two taps are provided on every V-Cone to allow sensing of the high and low pressures. A typical V-Cone application can follow these general performance specifications:

- Accuracy: up to ±0.5% of rate
- Repeatability: ±0.1%
- Turndown: 10:1
- Standard Betas: 0.45 through 0.85
- Headloss: Percentage of differential pressure produced varies with beta ratio.
- Installation: Typically 0-3 diameters upstream and 0-1 diameters downstream.


**Model VS Bulletins**  
ANSI B16.5 Slip-on, RF Flanges  
24509-32 Class 150 or 300  
24509-33 Class 600 or 900  
24509-34 Class 125 or 250



The V-Cone is manufactured under a quality management system that is certified to ISO 9001:2015.

\* Each V-Cone is sized for the intended application. Specific performance ratings must be obtained through the sizing process.

**MODEL VS<sub>(H)</sub> DIMENSIONS**

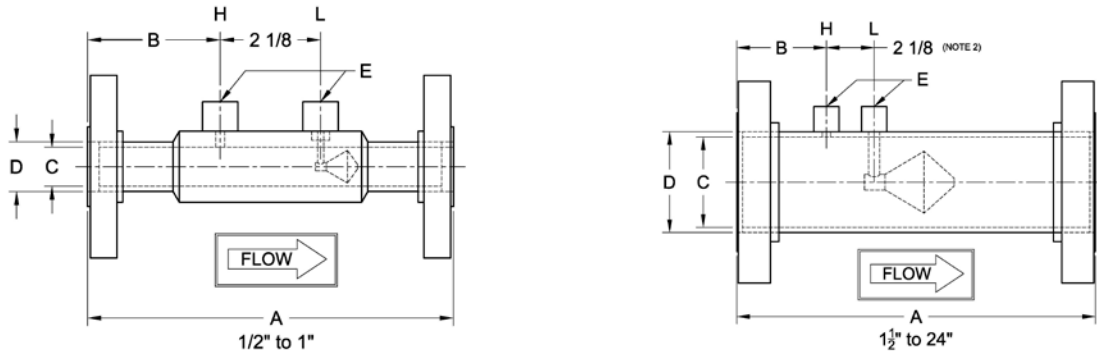

**DIMENSION TABLE**

Size	A (Note 1)		B		C-Stainless (Note 2)		C-Carbon (Note 2)		D		E (Note 2)
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	NPT
1/2	8	203	2.9	75	0.622	15.8	-	-	0.84	21.3	1/4
3/4	8	203	2.9	75	0.824	20.9	-	-	1.05	26.7	1/4
1	8	203	2.9	75	1.049	26.64	-	-	1.315	33.4	1/4
1 1/2	12	305	4.88	124	1.645	41.78	-	-	1.9	48.3	1/4
2	14	356	5.31	135	2.104	53.44	-	-	2.375	60.3	1/2
2 1/2	14	356	5.25	133	2.504	63.60	-	-	2.875	73.0	1/2
3	16	406	5.25	133	3.104	78.84	-	-	3.5	88.9	1/2
4	18	457	5.75	146	4.090	103.8	-	-	4.5	114	1/2
6	26	660	8	203	6.065	154.1	6.065	154.1	6.625	168	1/2
8	30	762	8.63	219	7.981	202.7	7.981	202.7	8.625	219	1/2
10	34	864	8.63	219	10.02	254.5	10.02	254.5	10.75	273	1/2
12	36	914	8.88	226	12.00	304.8	11.94	303.3	12.75	323	1/2
14	34	864	9.5	241	13.25	336.6	13.13	333.5	14	355	1/2
16	34	864	9.5	241	15.25	387.4	15.00	381.0	16	406	1/2
18	36	914	9.5	241	17.25	438.2	17.25	438.2	18	457	1/2
20	40	1016	9.5	241	19.25	489.0	19.25	489.0	20	508	1/2
24	54	1372	15.5	394	23.25	590.6	23.25	590.6	24	609	1/2

1. Overall length (A) tolerance varies with line size: 1/2" to 1", ±1/16" (±2mm); 1 1/2" to 10", ±1/8" (±4mm); 12" to 24", ±3/16" (±6mm).
2. Typical values shown.
3. Wall pressure ports are required for vertical up flow applications.



# SPECIFICATION SHEET

## MODEL NUMBER CONFIGURATION VS(H)

Type	Size	Materials‡		Pipe Schedule		End Connections		Fittings		
<b>VS</b>	0A	½"	Q	S304/L	D	Std	05	CL 600 RF SO	N	NPT
	0B	¾"	A	S316/L	R	30	06	CL 900 RF SO	S	Socket
	01	1"	S	CS Tube S304 Cone, Support, & Couplings Epoxy Coated Blue (excluding cone)	E	40	07	CL 1500 RF SO	F	Direct mount assembly
	0C	1½"			Q	60				
	02	2"			F	80				
	0D	2½"			J	100				
	03	3"	U	CS Tube S304 Cone, Support, & Couplings	K	120	‡Other materials can include: HASTELLOY C-276 DUPLEX 2205 CHROMEMOLY P22/P11 MONEL K400/K500 CARBON STEELS A350, A333, API5L, A106B S321H INCONEL 625			
	04	4"			L	140				
	06	6"	F	CS Tube, Flanges, & Couplings, 316/L Cone & Supports	G	160				
	08	8"	W	CS Tube, Flanges, & Couplings, S304/L Cone & Supports	P	XS				
	10	10"			H	XXS				
	12	12"	G	LTCS Tube, Flanges, & Couplings, S316/L Cone & Supports						
	14	14"								
	16	16"	N	S304/L Tube, Cone, Support & Couplings CS Steel Flanges						
	18	18"								
	20	20"								
24	24"									

Several types of fittings available.

Example: VS06QF07N V-Cone 6 inch line size, S304, schedule 80 pipe, ANSI CL 1500 RF slip on flanges, ½" NPT fittings

### STANDARD PIPE SCHEDULES

Stainless Steel		Carbon Steel	
Size	Std.	Size	Std.
½" to 10"	E	6" to 16"	E
12" and up	D	18" and up	D

Meters 6" and smaller utilize seamless pipe.  
Meters 8" and larger utilize welded pipe.

### ABBREVIATIONS

ASME	American Society of Mechanical Engineers		
NPT	National pipe taper		
CS	Carbon steel	RF	Raised Face
SS	Stainless steel	SO	Slip On

Technical questions can be answered through a local representative or through our application engineers.

### MANUFACTURING STANDARDS

McCrometer's welders and welding procedures are qualified in accordance with ASME Section IX. All meters are visually inspected for weld defects. Specific customer requirements can be complied with upon request.

The welding can be in accordance with:

- ASME Section VIII
- ASME B31.1
- ASME B31.3

Non-destructive testing can include:

- Hydrostatic Pressure Testing
- Penetrant Examination
- Radiographic Examination
- Positive Material Inspection
- Magnetic Particle Examination

REPRESENTED BY:

