



### Product Highlights

- Cost effective sound absorbing solution range between .45-.90 NRC
- 9' long panels are ideal for joint-free floor to ceiling application
- Broad range of neutral and bright colors, uniform through entire thickness
- Ideal material for commercial, hospitality, educational projects

### Turn Workspaces Into Idea Places™

High-quality visual display solutions for corporate, education, government and healthcare environments



## Features and Benefits

### PANEL SIZE / THICKNESS

- Nominal 4' x 9' x 1/2" (exact size 1225mm x 2800mm x 12mm)
- Thickness tolerance to be .02"
- Width and length tolerance to be +/- 1/8"

### SURFACE FINISH

- Acoustic panels have a matt surface both sides. Both sides are fine to use as the face surface, but will be slightly different, so therefore it is suggested that they are not installed side-by-side.

### APPLICATION

- Indoor areas only

### WEIGHT

- 0.5 lb / ft<sup>2</sup> / 2.4 kg / m<sup>2</sup>

### COLORS

- 5 standard colors, 15 optional colors


### INSTALLATION

- Adhere to substrate with adhesive.
- Attach with screws, Z-clips, nails, stand-offs or with aluminum trim or millwork.

### CARE INSTRUCTIONS

- Vacuum to remove dust
- Remove spills immediately using a clean damp cloth or with soap and water.
- Polyester carpet and fabric cleaners can be used – always test an inconspicuous area first.
- A stain repellent coating is available for additional protection.

### STANDARD COLORS

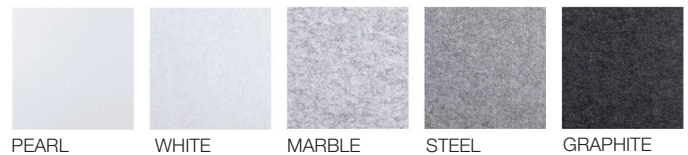

### OPTIONAL COLORS

