

# Printer Kiosk

Direct Thermal Printer Kiosk

## Standard Features

### Direct Thermal Printer Kiosk

- Custom America VKP80II
- Slide door access to ticket
- 8 in paper roll

## Specifications

**Line Voltages:**  
115 or 230 VAC

**Frequency:**  
50 or 60 Hz

**Power Consumption:**  
0.5 amps (depending on options)

**Fusing:**  
3.15 amps circuit breaker

**Humidity:**  
0-95% relative humidity

**Rating/Material:**  
NEMA Type 1  
IP10


**Printer Communication Ports:**  
RS-232 or Ethernet

**Storage Temperature:**  
14° to 158° F (-10° to 70° C)

**Warranty:**  
Two-year limited warranty



PN 112836

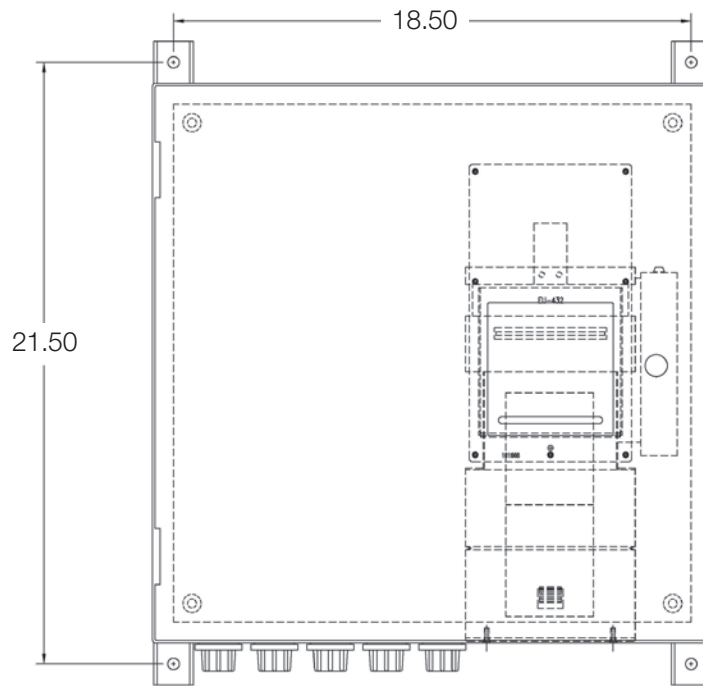

Printer Kiosk

