


# RoughDeck® BDP Mild Steel

Barrel, Drum, Pallet Scale – Stationary Model

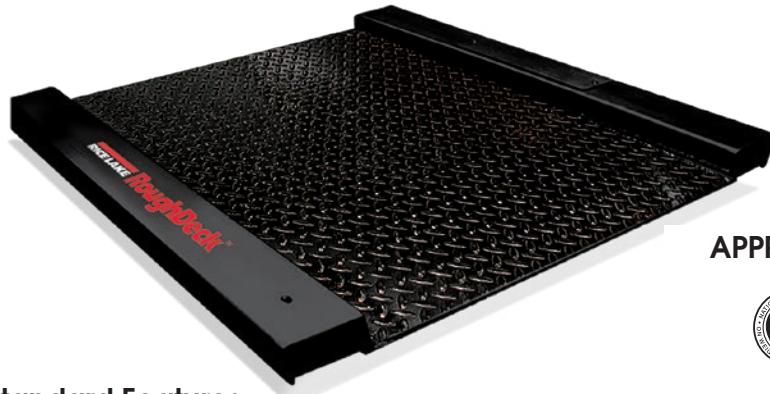

## Standard Features

- Live siderails
- Top access foot adjustment holes (holes are 1/2-13 threaded for lifting scale)
- Four adjustable stainless steel SUREFOOT™ support feet
- TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card
- Diamond tread top plate
- Alloy steel load cells

## APPROVALS



## Specifications

**End Load Capacity:**  
 1,000 lb: 100% full scale  
 2,500 lb: 80% full scale

**Cable Length:**  
 10 ft (3 m)

**Threaded Eyebolt:**  
 Hole (1/2-13 NC) located in center of deck for easy lifting

**Warranty:**  
 RoughDeck BDP weldment three years, load cells two years, all other components one year

**Approvals:**  
 NTEP CC 03-060, Class III 2,500 d  
 Measurement Canada AM-5578  
 (500 kg) Class III 2,500 d  
 (1,000 kg) Class III 2,000 d

## Part Number/Price

Part #	Size (W x L) Not Including Side Rails	Capacity (Canadian Approved Capacities)	Est. Weight	Price
77962	30 in x 31 in	1,000 lb (500 kg)	205 lb	\$1,725.00
77963	30 in x 31 in	2,500 lb (1,000 kg)	205 lb	\$1,725.00
77964	36 in x 37 in	1,000 lb (500 kg)	265 lb	\$1,850.00
77965	36 in x 37 in	2,500 lb (1,000 kg)	265 lb	\$1,850.00
<b>Access Ramps</b>				
78011	30 in x 12 in (sold individually)		25 lb	\$225.00
78012	36 in x 12 in (sold individually)		30 lb	\$225.00

## Options/Accessories

Part #	Description	Price
18777	Floor anchor plates, mild steel, set of 2 (for use with static scale, without ramps)	\$35.00
19352	RoughDeck floor stand for indicator, 36.3 in high, mild steel (for use with static scale)	\$235.00
126384	RoughDeck floor stand for indicator, 48 in high, mild steel	\$260.00
Consult	Mild steel deck with RL32018S IP66 stainless steel (cFMus approved) load cells, and hardware	+\$120.00 list price add-on
Consult	Mild steel deck with RL32218S-HE hermetically sealed IP69K stainless steel cFMus approved load cells and hardware	+\$440.00 list price add-on

## Dimensions Roughdeck BDP with access ramp

30 in x 31 in models			
A	30.0 in (762 mm)	D	3.31 in (84.1 mm)
B	31.0 in (787.4 mm)	G	30.0 in (762 mm)
C	40.0 in (1016 mm)	H	12.0 in (304.8 mm)
36 in x 37 in models			
A	36.0 in (914.4 mm)	D	3.31 in (84.1 mm)
B	37.0 in (939.8 mm)	G	36.0 in (914.4 mm)
C	46.0 in (1168.4 mm)	H	12.0 in (304.8 mm)

Distance from floor to top of center weighing surface: 1.625 in (41.2 mm)  
 Distance from floor to bottom of weighing surface: 0.31 in (7.87 mm)

