



Options/Accessories

Part #	Description	Price
Consult	Columns, Ball Transfer Tops, Roller Conveyor Tops, Carts available	See end of section for details

Dimensions


Part #	Capacity	Platform Size (L x W)	L1	W1	H
186897	50 lb (25 kg)	12 x 18 in	12.50 in	18.50 in	4.00 in
186898	100 lb (50 kg)	12 x 18 in	12.50 in	18.50 in	4.00 in
86952	50 lb (25 kg)	18 x 18 in	18.75 in	18.75 in	5.25 in
86953	100 lb (50 kg)	18 x 18 in	18.75 in	18.75 in	5.25 in
86954	150 lb (75 kg)	18 x 18 in	18.75 in	18.75 in	5.25 in
86955	200 lb (100 kg)	18 x 18 in	18.75 in	18.75 in	5.25 in
86956	250 lb (125 kg)	18 x 18 in	18.75 in	18.75 in	5.5 in
86957	300 lb (150 kg)	18 x 18 in	18.75 in	18.75 in	5.5 in
86958	500 lb (250 kg)	18 x 18 in	18.75 in	18.75 in	5.5 in
86959	1,000 lb (500 kg)	18 x 18 in	18.75 in	18.75 in	5.5 in
86960	50 lb (25 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86961	100 lb (50 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86962	150 lb (75 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86963	200 lb (100 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86964	250 lb (125 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86965	300 lb (150 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86966	500 lb (250 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86967	1,000 lb (500 kg)	18 x 24 in	24.75 in	18.75 in	5.5 in
86968	100 lb (50 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86969	150 lb (75 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86970	200 lb (100 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86971	250 lb (125 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86972	300 lb (150 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86973	500 lb (250 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in
86974	1,000 lb (500 kg)	24 x 24 in	24.75 in	24.75 in	5.5 in

Note: 1 in=25.4 mm

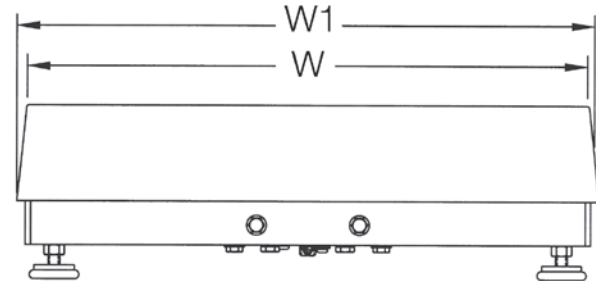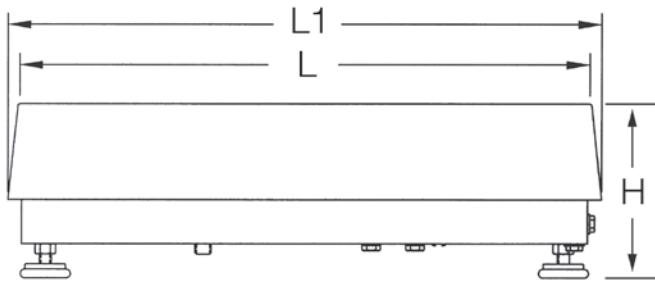

BenchMark® HE-X

Hostile Environment Extreme Bench Scale

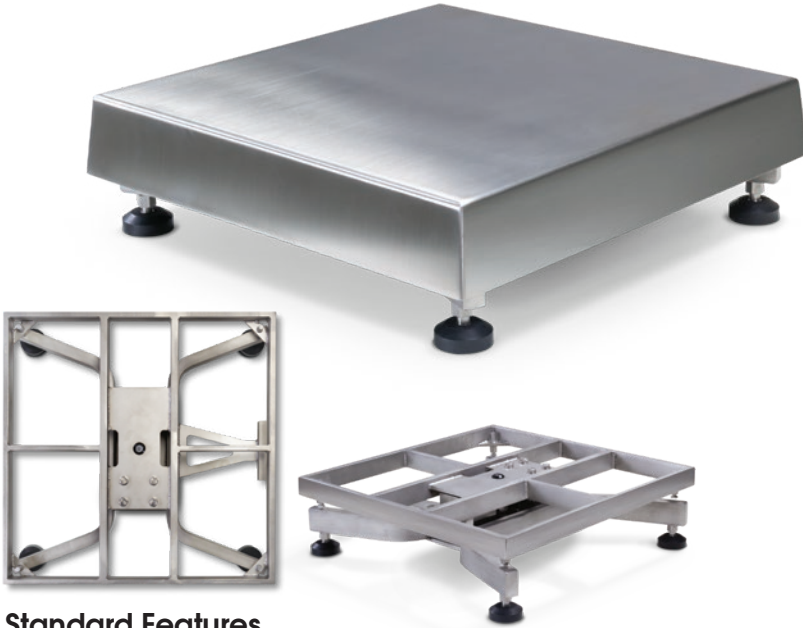

Specifications

- Load Cell, NTEP Certified:**
IP69K Stainless steel, hermetically sealed
- Output Impedance:**
1,000 Ω
- Maximum Overload:**
150-200% depending on capacity
- Overload Protection:**
Five-point, independently adjusted
- Cable Length:**
10ft (3m)
- Compensated Temperature Range:**
14° F to 104° F (-10° C to 40° C)
- Warranty:**
Three-year limited warranty (includes water ingress)
- Approvals:**
Load cell is FM approved

Standard Features

- Rugged washdown design, rigid 304 stainless steel frame and cover constructed with continuous welds
- Four adjustable stainless steel support feet
- IP69K stainless steel load cell
- Meets Sanitary Design Principles
- Meets HACCP requirements

APPROVALS



Part Number/Price

Part #	Capacity	Platform Dimensions	Est. Weight	Price
192346	50 lb (25 kg)	12 x 18 x 5.25 in	59 lb	\$2,300.00
192347	100 lb (50 kg)	12 x 18 x 5.25 in	59 lb	\$2,300.00
191455	50 lb (25 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191456	100 lb (50 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191457	150 lb (75 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191458	200 lb (100 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191459	250 lb (125 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191460	300 lb (150 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191461	500 lb (250 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191462	1,000 lb (500 kg)	18 x 18 x 5.25 in	73 lb	\$2,450.00
191467	50 lb (25 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191469	100 lb (50 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191470	150 lb (75 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191472	200 lb (100 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191473	250 lb (125 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191474	300 lb (150 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191475	500 lb (250 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191476	1,000 lb (500 kg)	18 x 24 x 5.25 in	90 lb	\$2,650.00
191479	100 lb (50 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191480	150 lb (75 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191481	200 lb (100 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191482	250 lb (125 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191483	300 lb (150 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191485	500 lb (250 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00
191486	1,000 lb (500 kg)	24 x 24 x 5.25 in	122 lb	\$2,850.00