

## Dipperwell Faucets

### B-2282 Dipperwell Faucet

- 6-1/16" (154 mm) overall height
- 1-11/16" (43 mm) clearance
- 2-3/4" (70 mm) shank
- 2-5/16" (58 mm) nozzle reach
- 1/2" NPSM shank with sweat fitting for 5/16" tubing
- Also available with flow control:

#### Model No. Flow (GPM)

B-2282-F03	0.25
B-2282-F05	0.40
B-2282-F07	0.70
B-2282-F10	0.90
B-2282-F12	1.20
B-2282-F15	1.40
B-2282-F20	2.00

To order:  
Select flow desired,  
then add suffix to  
model number.

Ex.: B-2282-F03 for  
0.25 GPM



### 006678-45 Dipperwell Bowl

- Keeps ice cream scoops and paddles clean and sanitized
- Stainless steel removable internal cup and outer bowl
- 1-1/2" (38 mm) brass tailpiece drain
- Sits flush with table top
- Drains quickly and easily



**B-2282-01** Includes B-2282  
Dipperwell faucet and  
006678-45 Dipperwell bowl

**B-2282-01-F05** Same as  
B-2282-01 except with  
0.40 GPM flow tower

**B-2282-01-M10** Master pack  
includes (10) B-2282-01  
faucet and bowl assemblies

## Elevated Kettle Filling Faucets


### B-0270 Double Pantry Faucet with Elevated Swing Nozzle



- Single hole deck mount mixing faucet (B-0300-LN)
- Quarter-turn Eterna cartridges with crossflow prevention
- 18" (457 mm) swing nozzle (065X) with rigid to swivel adapter
- Swivels from top
- 3/8" NPT 18" riser (000369-40)
- 27-5/8" (702 mm) clearance
- Lever handles with color coded indexes
- 18" flexible inlet hoses (compression fittings for 5/8" O.D. tubing or 1/2" NPSM male thread)

**B-0270-144XVF22** 18" (456 mm) swing nozzle (065X), vandal resistant aerator and 6" (152 mm) riser, 15-15/16" (405 mm) clearance

**B-0271** 12" (305 mm) swing nozzle (062X), 25-1/4" (641 mm) clearance

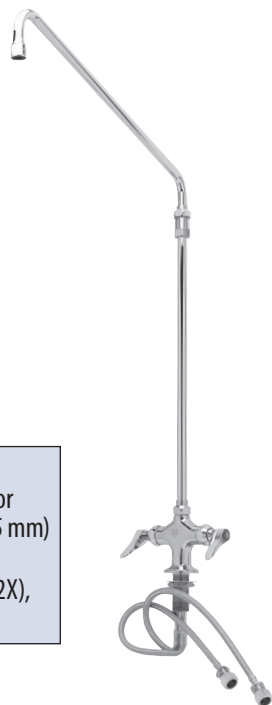

### B-0275 Single Pantry Faucet with Elevated Swing Nozzle



- Single hole, single temperature faucet (B-0305-LN)
- Quarter-turn Eterna cartridge
- 18" (457 mm) swing nozzle (065X)
- Swivels from top
- 3/8" NPT 18" riser (000369-40)
- 27-1/4" (692 mm) clearance
- Lever handle with color coded index
- 1/2" NPSM male shank
- Tailpiece and nut for 1/4" NPT connection included (150A)

**B-0276** 12" (305 mm) nozzle (062X), 18" (457 mm) riser, 26-1/16" (662 mm) clearance

