


SSBF909

Safety Station with Eye/Face Wash, Barrier-Free

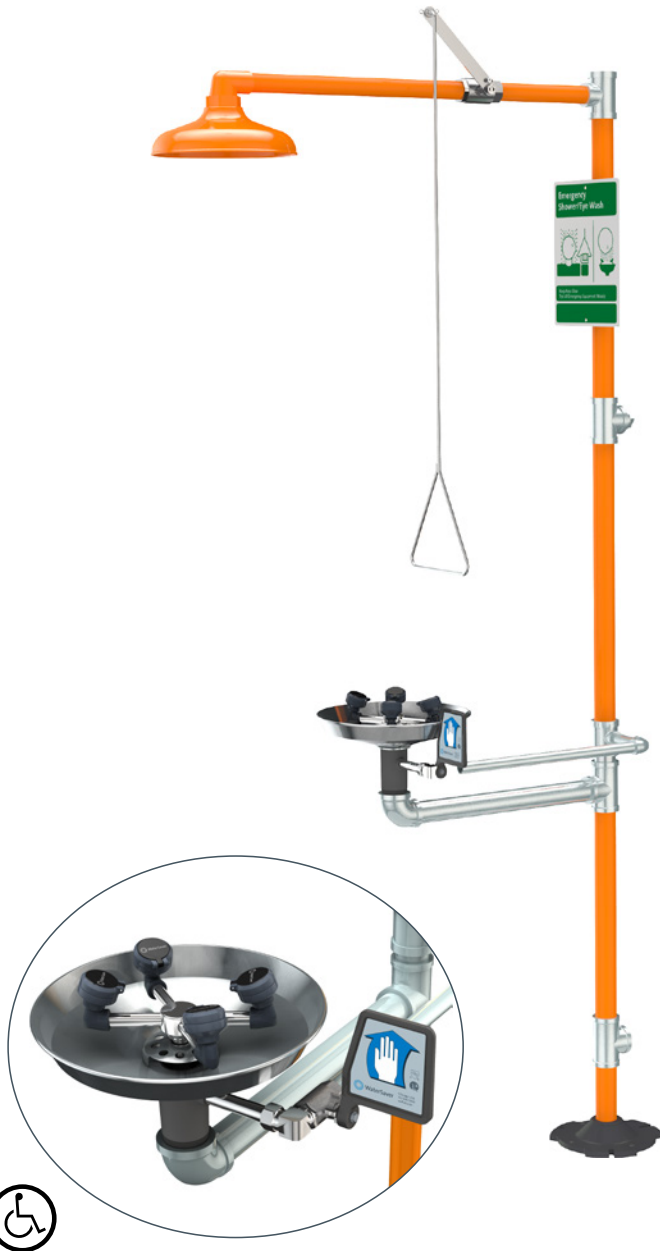

Application: Barrier-free combination WideArea™ eye/face wash and shower safety station.

ADA Compliance: Unit complies with ADA requirements for accessibility by handicapped person. Shower head and pull rod are extended for improved access. Bowl is lowered and extended to permit access by wheelchair user. Profile of unit is “flattened” to comply with maximum height and knee clearance requirements.

Shower Head: 10" (254mm) diameter safety orange ABS plastic.

Shower Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 47-1/2" stainless steel pull rod.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Eye/Face Wash Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Eye/Face Wash Bowl: 11-1/2" (292mm) diameter stainless steel.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers for piping for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top or side inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Eye/face wash frame assembly is factory assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Additional Model

SSBF994 Same as above except with all-stainless steel construction.

Optional Features:

- Epoxy powder coating on galvanized pipe and fittings. Available colors include orange (ORG), yellow (YEL), green (GRN) and red (RED).
- Stainless steel shower head (add suffix “SSH”)
- 20 GPM flow control for shower head (add suffix “FC20”)
- Stainless steel dust cover for each spray head (add suffix “DC”)

Accessories:

- Modesty curtain to provide privacy for user to disrobe while using emergency shower (order APBF250-015).
- Electric light and alarm horn assembly to notify personnel that unit is in use (order AP275-205).
- AP3800 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.