



Chekpoint™ Electronic Sensor Faucets


All models have: • Vandal-resistant aerator • AC/DC control module (electric plug-in and battery)

EC-3100 Electronic Faucet



- Adjustable automatic time-out features (6)
- Adjustable water shut-off delays (4)
- Optional auto-flush feature

- Chrome plated brass electronic faucet
- Deck mount rigid gooseneck
- B-0199-06 vandal-resistant aerator with key
- Height: 11" (279 mm)
- Spread: 4-1/8" (105 mm)
- Clearance: 7" (178 mm)
- (2) 18" (457 mm) long flexible supply hoses with 3/8" compression fittings
- Optional auto-flush feature flows water for 30 seconds after every 12 inactive hours
- Other rigid goosenecks can be specified (p. CP22)
- Includes 1/8" dia. anti-rotation pin
- Mechanical temperature mixing valve with integral check valves

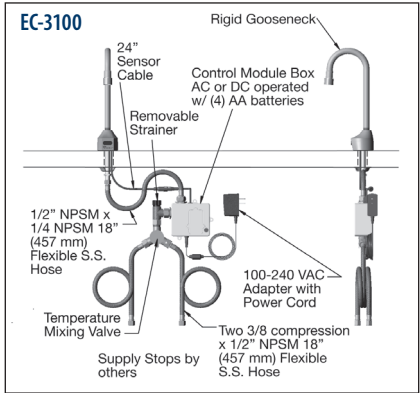

MODEL	GOOSENECK	HEIGHT	CLEARANCE	SPREAD	OUTLET	GPM	VR	NOTES
EC-3100	Rigid	11"	7"	4-1/8"	B-0199-06 VR aerator	2.2 GPM	Y	
EC-3100-120X	Rigid	12"	6-1/2"	5-1/2"	B-0199-06 VR aerator	2.2 GPM	Y	120X gooseneck
EC-3100-LF22	Rigid	11"	7"	4-1/8"	B-0199-21-VRF VR laminar flow device	2.2 GPM	Y	
EC-3100-HG	Rigid	11"	7"	4-1/8"	B-0199-06 VR aerator	2.2 GPM	Y	Includes EC-HYDROGEN hydrogenerator
EC-3100-LN	—	2-1/4"	—	—	—	—	Y	Less gooseneck/aerator
EC-3100-LF22-SB	Rigid	13"	7-5/8"	7-1/16"	B-0199-21-VRF VR laminar flow device	2.2 GPM	Y	Surgical bend gooseneck w/ VR laminar flow device; (see photo above)
EC-3100-SMT4	Rigid	11-5/16"	7-5/16"	4-1/8"	B-0199-06 VR aerator	2.2 GPM	Y	Includes EC-SMT above deck side mount adj. thermostatic mixing valve; 6-1/2" wide deck plate
EC-3100-SMT4V05	Rigid	11-5/16"	7-5/16"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	Includes EC-SMT above deck side mount adj. thermostatic mixing valve; 6-1/2" wide deck plate
EC-3100-SMT8	Rigid	11-5/16"	7-5/16"	4-1/8"	B-0199-06 VR aerator	2.2 GPM	Y	Includes EC-SMT above deck side mount adj. thermostatic mixing valve; 10" wide deck plate
EC-3100-SMT8V05	Rigid	11-5/16"	7-5/16"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	Includes EC-SMT above deck side mount adj. thermostatic mixing valve; 10" wide deck plate
EC-3100-TMV	Rigid	11"	7-5/16"	4-1/8"	B-0199-06 VR aerator	2.2 GPM	Y	Includes EC-TMV ASSE 1070 thermostatic temp. mixing valve with integral check valves
EC-3100-TMV4V05	Rigid	11-5/16"	7-5/16"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	Includes EC-TMV ASSE 1070 thermostatic temp. mixing valve with integral check valves; 6" wide deck plate
EC-3100-TMVHGF10	Rigid	11"	7"	4-1/8"	B-0199-06-F10 VR aerator	1.0 GPM	Y	Includes EC-HYDROGEN hydrogenerator power supply and EC-TMV ASSE 1070 thermostatic temp. mixing valve with integral check valves
EC-3100-VF05	Rigid	11"	7"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	
EC-3100-VF05-HG	Rigid	11"	7"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	EC-HYDROGEN-LF low flow hydrogenerator (see p. CP19-20)
EC-3100-VF05THG	Rigid	11"	7-5/16"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	Thermostatic mixing valve; EC-HYDROGEN-LF low flow hydrogenerator (see p. CP19-20)
EC-3100-VF5-TMV	Rigid	11"	7-5/16"	4-1/8"	B-0199-06-N05 VR non-aerated spray device	0.5 GPM	Y	Includes EC-TMV ASSE 1070 thermostatic temp. mixing valve with integral check valves
EC-3100-XP-LF10	Rigid (120XP)	11-1/4"	5-1/2"	5-1/2"	Plain end	1.0 GPM	N	Includes 1.0 GPM flow control check valve

VR Vandal-resistant