


## Fasteners for exposed concrete surface external vibrators (AR26)

Fastening Systems



**WACKER  
NEUSON**  
*all it takes!*

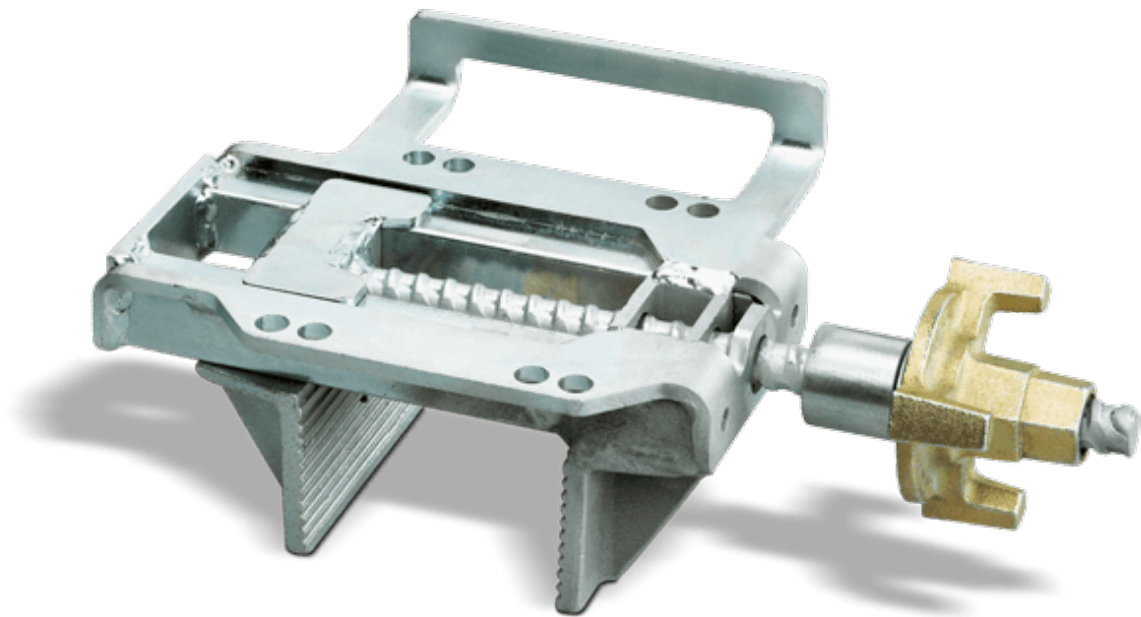

### universal safe use.

Thanks to a variety of fastening clamps, the fixing of the Wacker Neuson quality exposed concrete surface external vibrators is easy. Wacker Neuson has the right fastener - no matter whether you need it for beam-type formwork, formwork girders, frame-type formwork or standard equipment.

- For the quick fixing of external vibrators
- For all standard formwork systems
- Easy to use

## Fasteners for exposed concrete surface external vibrators (AR26) Technical specifications

	SV 4	SV 5	SV 6	AV 6	SV 46
Length with saddle clamp in	12.7	15.1	9.8	10.2	9.8
Width with saddle clamp in	7.7	7.7	5.5	8.7	5.5
Height with saddle clamp in	4.8	4.8	6.8	2.1	9.1
Weight lb	9.5	12.1	14.6	4.6	17.1

	SV 41	SV 51	SV 52	SV 53
Length with saddle clamp in	7.5	16.1	9.2	15.3
Width with saddle clamp in	5.2	8.1	4.9	8.1
Height with saddle clamp in	2.1	5.1	9.9	3.9
Weight lb	7.1	10.6	9.5	11.7

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.  
Copyright © 2020 Wacker Neuson SE.